Greenhouse Gas Reporting Program

XML Reporting Instructions for Subpart C -General Stationary Fuel Combustion Sources

United States Environmental Protection Agency Climate Change Division Washington, DC

January 25, 2021

These instructions explain how to upload the required data for the applicable regulations. Owners and operators of units should refer to the applicable regulations for information about what data are required to be uploaded.



Table of Contents

		Page
I.	Introduction	1
II.	Summary of Changes	9
III.	Subpart C Overview	10
1.0	Subpart C Total Emissions	12
2.0	Configuration Identification Information	16
2.1	Configuration Type 1 Identification	19
2.2	Configuration Type 2 Identification	24
2.3	Configuration Type 3 Identification	29
2.4	Configuration Type 4 Identification	33
2.5	Configuration Type 5 Identification	37
2.6	Configuration Type 6 Identification	41
2.7	Configuration Plant Code	43
3.0	0	
3.1		
3.2		
3.3	Configuration Type 3 Configuration Level Emissions	48
3.4		
3.5		
3.6	Configuration Type 6 Configuration Level Emissions	54
4.0	V 0 VI	
4.1		
4.2		
4.3		
4.4		
4.5	Part 75 Fuel Details	.107
5.0		.110
5.1	6 -	
5.2		
5.3	Non Operational Units C Details	.119
6.0	Facility Level Roll-up Emissions	.122
IV.	Appendix A: Sample XML Document for Subpart C	.123

List of Tables

		Page
Table 1	Reporting Numbers	
Table 2	Calculated Details Data Element Definitions	
Table 3	Measurement Details Data Element Definitions	
Table 4	Unit Identification Details Data Element Definitions	
Table 5	Summary of Changes to the Schema for Subpart C	
Table 6	Greenhouse Gas Information Details Data Element Definitions	
Table 7	Configuration Type 1 Unit Identification Data Element Definitions	20
Table 8	Configuration Type 1 Individual Unit Details Data Element Definitions	22
Table 9	Configuration Type 2 Unit Identification Data Element Definitions	25
Table 10	Configuration Type 2 Individual Unit Details Data Element Definitions	27
Table 11	Configuration Type 3 Unit Identification Data Element Definitions	30
Table 12	Small Unit Aggregation Details Data Element Definitions	31
Table 13	Configuration Type 4 Unit Identification Data Element Definitions	34
Table 14	Common Pipe Details Data Element Definitions	36
Table 15	Configuration Type 5 Unit Identification Data Element Definitions	38
Table 16	Common Stack Details Data Element Definitions	39
Table 17	Configuration Type 6 Unit Identification Data Element Definitions	42
Table 18	Configuration Plant Code Data Element Definitions	43
Table 19	Configuration Type 1 Configuration Level Emissions Data Element Definitions	47
Table 20	Configuration Type 3 Configuration Level Emissions Data Element Definitions	49
Table 21	Configuration Type 4 Configuration Level Emissions Data Element Definitions	51
Table 22	Configuration Type 6 Configuration Level Emissions Data Element Definitions	54
Table 23	Part 75 Details Data Element Definitions	56
Table 24	Appendix D and G Calculation Method Details Data Element Definitions	57
Table 25	CEMS Details Data Element Definitions	58
Table 26	Tier Fuel Details Data Element Definitions	61
Table 27	Tier 1 Fuel Details Data Element Definitions	65
Table 28	Tier 1 Emissions Details Node Data Element Definitions	66
Table 29	Tier 1 Equation Inputs Data Element Definitions	69
Table 30	Tier 2 Fuel Details Data Element Definitions	72
Table 31	Tier 2 Monthly HHV Details Data Element Definitions	73
Table 32	Tier 2 Monthly HHV Details Emissions Details Node Data Element Definitions	76
Table 33	Tier 2 Equation C2aC9a Data Element Definitions	79
Table 34	Tier 2 Equation C2cC9b Data Element Definitions	81
Table 35	Tier 3 Fuel Details Data Element Definitions	83
Table 36	Tier 3 Fuel Details Emissions Details Node Data Element Definitions	85
Table 37	Tier 3 Equation C3C8 Data Element Definitions	87
Table 38	Tier 3 Equation C4C8 Data Element Definitions	90
Table 39	Tier 3 Equation C5C8 Data Element Definitions	94

Table 40	Tier 3 Fuel Details Data Element Definitions	98
Table 41	Tier 4 Fuel Details Data Element Definitions	102
Table 42	Tier 4 Equation C10 Inputs Data Element Definitions	104
Table 43	Tier 4 Equation C13 Inputs Data Element Definitions	105
Table 44	Part 75 Fuel Details Data Element Definitions	108
Table 45	Biogenic CO ₂ Verification Details Data Element Definitions	110
Table 46	Tier 4 Details Data Element Definitions	113
Table 47	Operating Hours Details Data Element Definitions	116
Table 48	Biogenic Portion Details Data Element Definitions	118
Table 49	Unit Identification for Non Operational Units	120

List of Figures

Figure 1	Example of an XML Tree	Page 2
U	Calculated Details Data Type Schema Diagram	
Figure 2 Figure 3	••	
U	Measurement Details Data Type Schema Diagram Unit Identification Details Data Type Schema Diagram	
Figure 4	Unit Identification Details Data Type Schema Diagram	
Figure 5	"Unbounded" Symbol in Schema Diagram	
Figure 6	Logical "Or" Symbol in Schema Diagram	
Figure 7	Subpart C Reporting Diagram	
Figure 8	Subpart C Schema Diagram	
Figure 9	Greenhouse Gas Information Details Schema Diagram	
Figure 10	Units C Details for Configuration Type 1 Schema Diagram	
Figure 11	Configuration Type 1 Unit Identification Schema Diagram	
_	Configuration Type 1 Individual Unit Details Schema Diagram	
Figure 13	Units C Details for Configuration Type 2 Schema Diagram	24
Figure 14	Configuration Type 2 Unit Identification Schema Diagram	25
Figure 15	Configuration Type 2 Individual Unit Details Schema Diagram	27
Figure 16	Units C Details for Configuration Type 3 Schema Diagram	29
Figure 17	Configuration Type 3 Unit Identification Schema Diagram	30
Figure 18	Small Unit Aggregation Details Schema Diagram	31
Figure 19	Units C Details for Configuration Type 4 Schema Diagram	33
Figure 20	Configuration Type 4 Unit Identification Schema Diagram	34
Figure 21	Common Pipe Details Schema Diagram	35
Figure 22	Units C Details for Configuration Type 5 Schema Diagram	37
Figure 23	Configuration Type 5 Unit Identification Schema Diagram	38
Figure 24	Common Stack Details Schema Diagram	39
	Units C Details for Configuration Type 6 Schema Diagram	
Figure 26	Configuration Type 6 Unit Identification Schema Diagram	42
Figure 27	Configuration Plant Code Schema Diagram	43
	Configuration Level Emissions Data	
_	Configuration Type 1 Configuration Level Emissions	
Figure 30	Configuration Type 3 Configuration Level Emissions Schema Diagram	49
_	Configuration Type 4 Configuration Level Emissions Schema Diagram	
_	Configuration Type 6 Configuration Level Emissions Schema Diagram	
-	Part 75 Details Schema Diagram	
	Appendix D and G Calculation Method Details Schema Diagram	
_	CEMS Details Schema Diagram	
•	Tier Fuel Details Schema Diagram	
Figure 37	-	
\mathcal{C}	Tier 1 Fuel Details Equation C1C8 Inputs Schema Diagram	
_	Tier 1 Fuel Details Equation C1aC8a Inputs Schema Diagram	

Figure 40	Tier 1 Fuel Details Equation C1bC8b Inputs Schema Diagram	69
Figure 41	Tier 2 Fuel Details Schema Diagram	71
Figure 42	Tier 2 Monthly HHV Details Schema Diagram	72
Figure 43	Tier 2 Emissions Details Node Schema Diagram	75
Figure 44	EquationC2aC9a Inputs Schema Diagram	78
Figure 45	Equation C2cC9b Inputs Schema Diagram	80
Figure 46	Tier 3 Fuel Details Schema Diagram	82
Figure 47	Tier 3 Emissions Details Node Schema Diagram	84
Figure 48	Tier 3 Equation Inputs Schema Diagram	86
Figure 49	Tier 3 Equation C3C8 Inputs Schema Diagram	87
Figure 50	Tier 3 Equation C4C8 Inputs Schema Diagram	90
Figure 51	Tier 3 Equation C5C8 Inputs Schema Diagram	93
Figure 52	Additional Tier 3 Fuel Details Schema Diagram	96
Figure 53	Tier 4 Fuel Details Schema Diagram	101
Figure 54	Equation C10 Inputs Schema Diagram	103
Figure 55	Equation C13 Inputs Schema Diagram	105
Figure 56	Part 75 Fuel Details Schema Diagram	107
Figure 57	Biogenic Portion of CO ₂ Emissions and Portion Verification Schema Diagram	110
Figure 58	Tier 4 Details Schema Diagram	112
Figure 59	Tier 4 Quarter Details Schema Diagram	113
Figure 60	Operating Hours Details Schema Diagram	115
Figure 61	Biogenic Portion Details Schema Diagram	117
Figure 62	Non Operational Units C Details	119
Figure 63	Facility-Level Roll-up Emissions Schema Diagram	122

List of XML Excerpts

		Page
XML Excerpt 1	Example for "Unbounded" Parent Element	
XML Excerpt 2	Example for Greenhouse Gas Information Details	
XML Excerpt 3	Example for Configuration Type 1 Unit Identification	21
XML Excerpt 4	Example for Configuration Type 1 Individual Unit Details	23
XML Excerpt 5	Example for Configuration Type 2 Unit Identification	26
XML Excerpt 6	Example for Configuration Type 2 Individual Unit Details	28
XML Excerpt 7	Example for Configuration Type 3 Unit Identification	31
XML Excerpt 8	Example for Small Unit Aggregation Details	32
XML Excerpt 9	Example for Configuration Type 4 Unit Identification	35
XML Excerpt 10	Example for Common Pipe Details	36
XML Excerpt 11	Example for Configuration Type 5 Unit Identification	38
XML Excerpt 12	Example for Common Stack Details	40
XML Excerpt 13	Example for Configuration Type 6 Unit Identification	42
XML Excerpt 14	Example for Configuration Type 1 Configuration Level Emissions	44
XML Excerpt 15	Example for Configuration Type 1 Configuration Level Emissions	47
XML Excerpt 16	Example for Configuration Type 3 Configuration Level Emissions	50
XML Excerpt 17	Example for Configuration Type 4 Configuration Level Emissions	52
XML Excerpt 18	Example for Configuration Type 6 Configuration Level Emissions	54
XML Excerpt 19	Example for Part 75 Details	56
XML Excerpt 20	Example for Appendix D and G Calculation Method Details	57
XML Excerpt 21	Example for CEMS Details	59
XML Excerpt 22	Example for Tier Fuel Details	62
XML Excerpt 23	Example for Tier 1 Fuel Details	65
XML Excerpt 24	Example for Tier 1 Emissions Details Node	66
XML Excerpt 25	Example for Equation C1C8 Inputs	70
XML Excerpt 26	Example for Equation C1aC8a Inputs	70
XML Excerpt 27	Example for Equation C1bC8b Inputs	70
XML Excerpt 28	Example for Tier 2 Fuel Details	72
XML Excerpt 29	Example for Tier 2 Monthly HHV Details	74
XML Excerpt 30	Example for Tier 2 Monthly HHV Details Emissions Details Node	77
XML Excerpt 31	Example for Tier 3 Fuel Details	83
XML Excerpt 32	Example for Tier 3 Fuel Details Emissions Details Node	100
XML Excerpt 33	Example for Tier 4 Fuel Details	103
XML Excerpt 34	Example for Equation C10 Inputs	104
XML Excerpt 35	Example for Equation C13 Inputs	106
XML Excerpt 36	Example for Part 75 Fuel Details	109
XML Excerpt 37	Example for Biogenic Portion of CO ₂ Emissions and Portion Verification Data	111
XML Excerpt 38	Example for Tier 4 Details	114
XML Excerpt 39	Example for Operating Hours Details	117

XML Excerpt 40	Example for Biogenic Portion Details	118
XML Excerpt 41	Example for Non Operational Units	121

I. Introduction

This document provides a step-by-step description of how to report emissions data to the EPA electronic greenhouse gas reporting tool (e-GGRT) using the Greenhouse Gas (GHG) XML schema. The GHG XML schema contains all of the data elements needed to comply with the Greenhouse Gas Reporting Program (GHGRP). The schema defines expected data elements and attributes, allowable data formats for each data element, and the hierarchical structure and sequence in which data elements are placed within the XML file.

The GHG XML schema's root data element is "GHG". The data elements within the schema are related to each other in parent-child relationships. The root data element is the parent of the entire schema.

The e-GGRT XML upload method may be used for reporting a facility or supplier's annual GHG data. However, the following actions must be performed using only the e-GGRT web forms:

- User, facility and supplier registration
- Certificate of Representation and Notice of Delegation signing
- Facility representative and agent changes
- Facility and supplier address changes
- Notice of intent to not submit an annual GHG report

Every XML file submitted to e-GGRT must be well-formed and conform to the current version of the GHG schema. Every XML file must contain GHG data only for a single facility or supplier. Reporters are required to submit a single XML file containing all emissions data for a facility or supplier as a complete report. The XML file must include all of the relevant Subparts. Reporters cannot submit a portion of a facility's data to add, delete, correct or update. To make any modification to previously submitted emissions data, a reporter must resubmit the entire set of emissions data. Each subsequent submission for the same facility replaces all of the previously submitted data.

The schema contains enumerated lists of the units of measures for some data elements and allowable values for some data elements. For rules regarding the unit of measure or allowable values for a specific data element, please refer to the appropriate Data Element Definitions table.

The reporting schema is available for download at the e-GGRT help website: http://www.ccdsupport.com/confluence/display/help/XML+Reporting+Instructions. The page includes:

- Schema zip file with the master GHG_Final_v*N.n.*xsd and supporting subpart and component xsd files for the current reporting year.
- Schema change log files and year to year comparison reports.

Table 1 Reporting Numbers

Number Format	Description	
	• CO ₂ e and CO ₂ emissions data expressed in metric tons should be rounded to one decimal place. This should be done regardless of the level of data collection (e.g., unit-level, facility-level). Quantities less than 0.05 metric tons would round to 0.0 and be reported as such. Quantities greater than or equal to 0.05 metric tons would round up to 0.1 and be reported as such.	
	 CH₄ emissions data expressed in metric tons should be rounded to two decimal places. 	
	 N₂O emissions data expressed in metric tons should be rounded to three decimal places. 	
Rounding	 Emissions data for all GHGs other than CO₂, N₂O and CH₄ expressed in metric tons should be rounded to the fourth digit to the right of the decimal (one tenth of a kilogram, or 1 ten thousandth of a metric ton). This rounding should be applied regardless of the level of data collection (unit, facility, etc.). 	
	Other (non-emissions) quantitative data reported by the user (e.g., a monthly HHV sample result, an annual production quantity) will not need to be rounded.	
	 In the case of aggregation/roll-ups, those calculations should be performed on the rounded values. 	
Percentages	If a value is reported as a percentage, then the number should be within the range of 0 to 100 (percent). For example, 85.5% is reported as 85.5.	
Fractions	If a value must be reported as a decimal fraction, then the number should be within the range of 0 and 1, (e.g., 1/4 should be reported as 0.25). Leading zeroes are optional.	

Key XML Terms


- MRR: Greenhouse Gas Reporting Rule reference.
- **XML:** A markup language for documents containing structured information. The XML specification defines a standard way to add markup to documents. Its primary purpose is to facilitate the sharing of structured data across different information systems, particularly via the internet.
- XML Schema: An XML schema describes the structure of an XML document. The schema also defines the set of rules to which the XML document must conform in order to be considered "valid".


- XML file: A file containing data organized into a structured document using XML markup.
- **Data Element:** An XML data element is used for storing and classifying data in an XML file. Opening and closing tags represent the start and end of a data element. An opening tag looks like <elementName>, while a closing tag has a slash that is placed before the element's name </elementName>. The following example shows how to report the facility's identification number: <FacilitySiteIdentifier>232222</FacilitySiteIdentifier>. The information shaded in blue represents the data element's value.

If a data element does not contain a value, then a single empty tag name may be used. An empty tag has a slash placed after the element's name <FacilitySiteIdentifier/>. Note: If you do not intend to report a value for a particular data element, then it is recommended that you do not include the data element in the XML file.

- **Attribute:** An XML attribute contains additional information about a specific data element. An attribute for a data element is placed within the opening tag. The syntax for including an attribute in an element is <elementName attributeName="value">. For example, <TotalCH4CombustionEmissions massUOM="Metric Tons">.
- **Root/Parent/Child Element:** The schema's structure is like a family tree. At the top of the tree is some early ancestor and at the bottom of the tree are the latest children. With a tree structure you can see which children belong to which parents and many other relationships.

XML data elements are sometimes referenced in terms of how they relate to each other, such as in a parent-to-child relationship. The top of the XML tree is considered the root – it is the parent to all data elements within the schema. In the example below, "GHG_Unit_Details" is the root, and just like in many other family trees, there is more than one item with the same name (e.g., "Unit_ID"). The easiest way to distinguish these items is by referencing them in terms of their parent-child relationships, e.g., NoCEMS/Unit_ID vs. CEMS/Unit_ID.



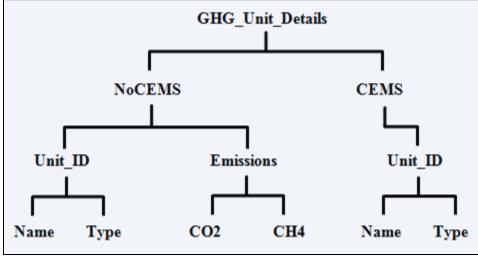


This document provides a step-by-step description of how to report emissions data using the XML schema. Please note the following seven tips on preparing your XML file:

- **Do not include non-applicable data elements in your facility's XML file.** The schema contains many data elements, some of which may not be applicable to XML reporters in general or to a particular situation. If the instructions (definition tables) do not reference a particular data element, then **do not** report or include it in your facility's XML file.
- Sequence data elements in the order specified by the schema. The figures and tables in this document depict the proper sequence in which data elements are arranged in the XML file to produce a well-formed XML report.
- Enumerations are case sensitive. Many data elements have a defined set of allowable values, also known as enumerations. Report values for enumerations exactly as they are defined within the schema, including punctuation marks. See the definition tables for a complete list of enumerations.
- Schema diagrams depict the hierarchy (or tree structure). The primary purpose of the schema diagrams is to indicate the sequence in which data elements must appear within the facility's XML file and to identify the data elements that are required (must be reported) and conditionally required (see last bullet). Required data elements are boxed in red and conditionally required data elements are noted.
- Definition tables provide details for required and conditionally required data elements. The tables are designed to provide unique instructions for reporting a given data element, including the list of enumerations and required units of measure, if defined. As noted above, there are some data elements in the schema that are not applicable to XML reporters or to a particular situation. For example, the "OverrideIndicator" data element is used solely by e-GGRT to indicate that the web form reporter chose to override the system's calculated value with their own. These non-applicable data elements are not included in the definition tables. If a data element is not referenced in a definition table, then do not report or include it in the facility's XML file.
- The schema diagrams do not depict commonly used data types. The schema diagrams display almost every data element in the schema except the data elements that are associated with the three most commonly occurring data types:
 - Calculated Details
 - Measurement Details
 - Unit Identification Details

Once defined, these commonly used data types (static collection of data elements) are associated as children to every data element in the schema containing a measured or calculated value or unit details. These child data elements do not appear in the diagrams and are not listed on separate rows in the definition tables in order reduce their redundancy. They are however, referenced in the definition tables in the description of their parent data element.

• Conditionally required data elements. Conditionally required data elements are noted in the schema diagrams and the data element definitions tables. If your facility meets the condition specified for the data element, then the data element is required and you must include it in your facility's XML file. If your facility does not meet the condition specified for the data element, then do not include the data element in the facility's XML file. Do not include a parent element that is not required, nor include any of its child data elements in your facility's XML file.

Figure 2
Calculated Details Data Type Schema Diagram




Note: Data elements boxed in red are required.

Table 2
Calculated Details Data Element Definitions

Data Element Name	Description
CalculatedDetailsDataType	
CalculatedValue	Calculated value (decimal).
OverrideIndicator	Note: Do not include this data element in the facility's XML file because it only applies to web form reporters. It is a flag set by e-GGRT to indicate that the system-calculated value was overridden with the web form reporter's value.

Figure 3
Measurement Details Data Type Schema Diagram

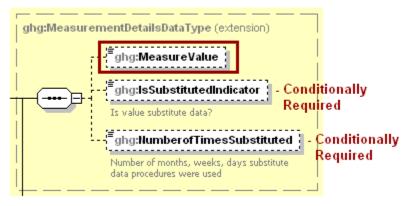


Note: Data elements boxed in red are required. Please see page 4 of this document for more information on conditionally required elements.

Table 3
Measurement Details Data Element Definitions

Data Element Name	Description
MeasurementDetailsDataType	
MeasureValue	Measured value (decimal).
IsSubstitutedIndicator	An indication (Y/N) that the measured value contains substituted data.
	Note: Do not include this data element in your XML file unless noted in the instructions for the particular measured value.
NumberofTimesSubstituted	The number (integer) of days, months, weeks, or hours in the reporting year that missing data procedures were followed.
Trumocrof Timesoubstituted	Note: Do not include this data element in your XML file unless noted in the instructions for the particular measured value.

Figure 4 Unit Identification Details Data Type Schema Diagram

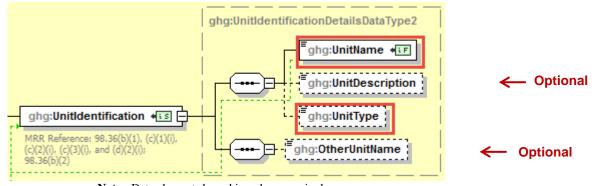

Note: Data elements boxed in red are required.


Table 4
Unit Identification Details Data Element Definitions

Data Element Name	Description
UnitIdentificationDetails	
UnitName	A unique name (ID) for each unit so that the data for different units can be recorded, maintained and retrieved clearly.
UnitDescription	Optional brief description of the unit.

Data Element Name	Description
UnitType	The type of unit. The list of allowable values varies. For more information, see the instructions for the specific unit process to be reported. For example, if reporting Flare Gas details, the unit type would be "Flare".
OtherUnitName	Optional other name for the unit.

The XML symbol "0...∞" shown in Figure 5 means that the parent element is "unbounded" so that multiple instances of the parent element can be reported. XML Excerpt 1 shows an example of reporting multiple instances of a parent element.


Figure 5 "Unbounded" Symbol in Schema Diagram



XML Excerpt 1 Example for "Unbounded" Parent Element

The XML symbol for a logical "Or" shown in Figure 6 means that **only one** of the data elements following the symbol can be reported for the current instance of the parent element.

Figure 6 Logical "Or" Symbol in Schema Diagram



II. Summary of Changes

The following modifications were made to the Subpart C schema for reporting year 2020.

Table 5
Summary of Changes to the Schema for Subpart C

No.	Change Description	Applicable Reporting Years
1	To better allow users to indicate the reason why they report inputs using IVT EPA has expanded the allowable values so the Electrical Generating Units (EGUs) who are required to report inputs can indicate they are EGUs. UseIVTIndicator has been modifed to allow values of "Y", "N" and "N (EGU)" where it was previously a Y/N field.	All

Please note that example screen images and XML examples sourced from or labeled with a prior reporting year are accurate for Reporting Year 2020.

III. Subpart C Overview

This section provides a brief overview of Subpart C – General Stationary Fuel Combustion Sources for Part 98. It includes a definition of the source category, the basic reporting requirements, and a description of this document's layout.

1.0 Subpart C Total Emissions Unit Configuration Type Identification and Details Common Pipe Unit Configurations Aggregation of Units Monitored Common Stack or Duct Unit Configurations Single Unit using Tier 4 (CEMS) 3.6 Unit Configuration Level Emissions Common Pipe Unit Configurations Monitored Common Stack or Duct Unit Configurations Single Unit using Tier 4 (CEMS) 4.1 42 4.3 4.4 4.5 Tier Fuel Details Tier 2 Fuel Details Tier 3 Fuel Details Tier 4 Fuel Details Part 75 Fuel Details

6.0 Facility Level Roll-up Emissions 5.1 Tier 4 Details

Figure 7
Subpart C Reporting Diagram

Stationary fuel combustion sources are devices that combust solid, liquid, or gaseous fuel, generally for the purposes of producing electricity, generating steam or providing useful heat or energy for industrial, commercial or institutional use, or reducing the volume of waste by removing combustible matter. Stationary fuel combustion sources include, but are not limited to, boilers, simple and combined-cycle combustion turbines, engines, incinerators and process heaters. This source category does not include portable equipment, emergency equipment or emergency generators, as defined in §98.6.

The XML schema includes the following areas for reporting for Subpart C, as displayed in the reporting diagram:

- 1.0 Subpart C Total Emissions: includes the total greenhouse gas emissions required to be reported for Subpart C.
- 2.0 Configuration Identification Information: includes unit configuration type identification and details.
- 3.0 Unit Configuration Level Emissions: includes information on how to report emissions based on configuration type.
- 4.0 Tier Fuel Details: includes how to report fuel information based on the tier methodology used.
- 5.0 Additional Configuration Details: includes additional information to report for Tier 4 and Part 75 methodologies.
- 6.0 Facility Level Roll-up Emissions: includes information on how to report total emissions for CO₂e (excluding biogenic CO₂) and biogenic CO₂ from Subpart C at the facility level.

The figure below depicts the overall structure of the XML schema as it relates to Subpart C. This document provides instruction for reporting data elements based on the order in which they are placed within the schema. As a result, there are two sections (3.0 and 5.0) for configuration level emissions information.

ghg:CUnitDataType Section 1.0 **Subpart C Total Emissions** ghg:UnitsCDetailsDataType ghg:UnitIdentification ghg:IndividualUnitDetails 🗓 ghg:SmallUnitAggregationDetails 🕏 Section 2.0 Unit & Configuration **~:**⇒]⊒ dentification ghg:CommonStackDetails 🗗 ng:Part75Details 🗓 ghg:CO2EmissionsGeneratedUsi... 🗗 Section 3.0 SorbentCO2EmissionsQuant... Configuration Level **Emissions** ghg:CO2EmissionsAllBiomassFu... g:CO2EmissionsAllFossilFuels... Section 4.0 - Fuel Level Emissions ghg:BioGenicCO2VerificationDet... Section 5.0 **Additional** Configuration ghg:Fier4Details 🗓 **Level Emissions ⊕** constraints ghg:NonOperationalUnitsCDetails

Figure 8 Subpart C Schema Diagram

Note: Data elements boxed in red are required

1.0 Subpart C Total Emissions

Greenhouse gas information details comprise a collection of data elements to report the total annual emissions of each greenhouse gas (GHG) listed in Table A-1 of 40 CFR 98 Mandatory Reporting of Greenhouse Gases reported under Subpart C, expressed in metric tons.

ghg:GHGasInfoDetailsDataType ghg:GHGasName ghg:GHGasCASRegistryNumber ghg:GHGasLinearChemicalFormula Use of these is ghg:OtherGHGasName not permitted for ghg:GHGasInfoDetails CO2, CH4, N20, or ghg:OtherGHGasCASRegistryNum. biogenic CO2 (C-II and RR-UU) 98.3(c)(4)(iii ghg:OtherGHGasLinearChemicalF... ppliers (LL-MM) 98.3(c)(5)(ii); ghg:OtherGasGHGGroup ghg:GHGasQuantity 🗄

Figure 9
Greenhouse Gas Information Details Schema Diagram

Note: Data elements boxed in red are required.

For Subpart C, report the gas name and emissions for biogenic carbon dioxide (CO_2) , CO_2 (excluding biogenic CO_2), methane (CH_4) and nitrous oxide (N_2O) ; do not report the CAS Registry Number, Linear Chemical Formula, or the other gas data elements for CO2, biogenic CO2, CH4, or N2O. For greenhouse gas quantity, report the calculated value and mass unit of measure (Metric Tons) only according to the following guidelines:

1) Total CO₂ emissions (excluding biogenic CO₂):

- For Configuration Types 1 and 3, add the CO₂ emissions (include both biogenic and non-biogenic CO₂) for each fuel and for each configuration in metric tons, add the CO₂ emissions from sorbent use for each configuration in metric tons and subtract the total biogenic CO₂ emissions for each configuration in metric tons.
- For Configuration Types 2, 5 and 6, add the CO₂ emissions (include both biogenic and non-biogenic CO₂) measured by the CEMS or applicable Part 75 methodology for each configuration in metric tons and subtract the total biogenic CO₂ emissions for each configuration in metric tons.
- For Configuration Type 4, add the CO₂ emission (include both biogenic and non-biogenic CO₂) for each fuel and for each configuration in metric tons and subtract the total biogenic CO₂ emissions for each configuration in metric tons.

2) Total biogenic CO₂ emissions:

Add the total annual biogenic CO₂ emissions for each configuration in metric tons. This
includes CO₂ emissions from biomass fuels and the biogenic portion of CO₂ emissions
from mixed biomass and fossil fuels (i.e. MSW and tires).

3) Total CH₄ emissions:

- For Configuration Types 1 through 5, add the values reported for CH₄ emissions for each fuel and for each configuration in metric tons.
- For Configuration Type 6, divide the values reported for CH₄ emissions in CO₂e by the Global Warming Potential for CH₄ and add the result.

4) Total N₂O emissions:

- For Configuration Types 1 through 5, add the values reported for N₂O emissions for each fuel and for each configuration in metric tons.
- For Configuration Type 6, divide the values reported for N₂O emissions in CO₂e by the Global Warming Potential for N₂O and add the result.

Note: You must follow the rounding rules found in <u>Table 1</u>.

Table 6
Greenhouse Gas Information Details Data Element Definitions

Data Element Name	Description
GHGasInfoDetails	Parent Element: A collection of data elements containing the total annual emissions of each greenhouse gas (GHG) listed in Table A-1 of 40 CFR 98 Mandatory Reporting of Greenhouse Gases, reported under this Subpart, expressed in metric tons.
GHGasName	Specify the name of the GHG. See list of allowable values: Carbon Dioxide Biogenic Carbon dioxide Methane Nitrous Oxide
GHGasQuantity	A collection of data elements that quantify the annual emissions from this source category. Report the value in the child data element CalculatedValue using the guidelines above. Set the units of measure to "Metric Tons" in the attribute massUOM .

XML Excerpt 2 Example for Greenhouse Gas Information Details

```
<ghg:SubPartC>
        </ghg:GHGasQuantity>
</ghg:GHGasInfoDetails>
        <ghg:GHGasInfoDetails>
                 <ghg:GHGasName>Methane/ghg:GHGasName>
                 <ghg:GHGasQuantity massUOM="Metric Tons">
                 <ghg:CalculatedValue>4065.72</ghg:CalculatedValue>
                 </ghg:GHGasQuantity>
        </ghg:GHGasInfoDetails>
        <ghg:GHGasInfoDetails>
                 <ghg:GHGasName>Nitrous Oxide/ghg:GHGasName>
                 <ghg:GHGasQuantity massUOM="Metric Tons">
                         <ghg:CalculatedValue>398.581/ghg:CalculatedValue>
        </ghg:GHGasQuantity>
        <ghg:GHGasInfoDetails>
                 <ghg:GHGasName>Carbon Dioxide/ghg:GHGasName>
                 <ghg:GHGasQuantity massUOM="Metric Tons">
<ghg:CalculatedValue>518460.9/ghg:CalculatedValue>
                 </ghg:GHGasQuantity>
        </qhq:GHGasInfoDetails>
```

Note: The code excerpt above is presented here to demonstrate the concept of reporting greenhouse gas emissions data

.

2.0 Configuration Identification Information

For stationary combustion sources required to report under Subpart C, e-GGRT requires you to identify which reporting option each unit or group of units will be using to report emissions. The different Subpart C reporting options are referred to as Configurations in e-GGRT. The individual configurations are designed to match the reporting options made available by the rule in 40 CFR 98.36. As specified in part 98, each configuration has slightly different reporting requirements. Emissions information to be reported is either aggregated at the configuration level or is to be reported for a specific fuel combusted in the configuration. A facility may have multiple configuration types and/or multiple configurations of any given type.

To create a valid XML file, complete data must be reported for one configuration at the facility before reporting data for another configuration at the facility.



Which configuration type(s) will you use to report emissions?

The unit or group configuration types are as follows:

- <u>Configuration Type 1</u> A single unit that uses Tier 1, 2, or 3 to calculate emissions [98.36(b)]
- Configuration Type 2 A single unit employing CEMS (Tier 4) to measure emissions [98.36(b)]
- Configuration Type 3 A reporting alternative for aggregating a group of small units (i.e., maximum rated heat input capacity of largest unit less than or equal to 250 mmBtu/hr) that use Tier 1, 2, or 3 to calculate emissions [98.36(c)(1)]
- Configuration Type 4 A reporting alternative for a group of units sharing a common gaseous or liquid fuel supply pipe and that use Tier 1, 2, or 3) to calculate emissions [98.36(c)(3)]
- Configuration Type 5 A group of units sharing a common exhaust stack employing CEMS (Tier 4) to measure emissions and reporting under the monitored common stack or duct configurations reporting alternative [98.36(c)(2)]
- <u>Configuration Type 6</u> − Part 75 units using the alternative CO₂ mass emissions calculation methods provided for year-round heat input reporters in 98.33(a)(5) [98.36(d)(2)]

The configuration types are described in further detail below. For more information on the different reporting options, please refer to the applicable paragraphs in 40 CFR 98.36.

Configuration Type 1 - Single Unit Using Tiers 1, 2 or 3 [98.36(b)]

The single unit reporting configuration is the most basic configuration type. Any unit may be reported individually in e-GGRT. If the unit uses Tiers 1, 2 or 3 to calculate CO_2 emissions, it must be reported as a configuration of Type 1. If the use of Tier 4 is required or elected, Configuration Type 2 or 5 must be used.

A unit under Configuration Type 1 may combust multiple fuels, and it is possible for the different fuels to be reported using different tiers. For example, a unit with a maximum rated heat input capacity of 500 mmBtu/hr may be required to use Tier 3 for coal, but only Tier 2 for natural gas or fuel oil.

Facilities with numerous units should investigate if Configuration Type 3 (aggregation of units) or Type 4 (common pipe) may be used.

See <u>Section 2.1</u> for instructions on how to report for Configuration Type 1. Configuration Type 2 – Single Unit Using Tier 4 [98.36(b)]

Configuration Type 2 is the reporting option for single units that are either required or elect to use Tier 4 (CEMS). CO_2 emissions will be reported for all fuels combined, but CH_4 and N_2O emissions will still need to be reported on a fuel by fuel basis.

Should a unit change methodology from Tiers 1-3 to Tier 4 during the year, the unit will need to be added as two separate configurations in e-GGRT with different configuration names.

If a single CEMS is used to monitor multiple units (multiple combustion, or one combustion and one or more process units), Configuration Type 5 should be used instead.



See Section 2.2 for instructions on how to report for Configuration Type 2.

Configuration Type 3 – Aggregation of Units [98.36(c)(1)]

The *aggregation of units* option is a reporting configuration that allows multiple 'small' units to be reported as a single entity provided that certain conditions are met. If this reporting option is selected, emissions from all units grouped in this configuration will be reported as combined emissions in e-GGRT.

If a facility contains two or more units, each of which has a maximum rated heat input capacity of 250 mmBtu/hr or less, you may report these units as a single reporting configuration of Type 3 in e-GGRT, provided that only Tiers 1-3 are used and the units use the same tier for any common fuels combusted. Fuels of different types may use different tiers, as permitted. There is no limit on the number of units that may be included in this configuration provided the previous criteria are met.

While the use of Tier 3 is permitted to be used in an *aggregation of units* configuration, it is generally not required for configurations of this type because Tier 3 is only required for certain units larger than 250 mmBtu/hr. Units of that size may not be included in the *aggregation of units* configuration.



See <u>Section 2.3</u> for instructions on how to report for Configuration Type 3.

Configuration Type 4 – Common Pipe [98.36(c)(3)]

The *common pipe* reporting configuration is another alternative reporting option that allows for multiple units to be reported as a single group entry.

This configuration is different from the *aggregation of units* configuration in that there is no size constraint. The *common pipe* configuration may only be used if two or more stationary combustion units at a facility combust the same type of liquid or gaseous fuel, and the fuel is fed to the individual units through a common supply line or pipe.

The *common pipe* configuration may only be used if the units only combust the liquid or gaseous fuel supplied by the common pipe. Units that combust fuel other than the fuel supplied by the common pipe must be accounted for under a separate configuration. For example, a unit that burns coal and natural gas may not be included in a *common pipe* configuration for units that only combust natural gas. In such a situation, you may report the units that only combust natural gas as a common pipe configuration. To calculate emissions for the common pipe, you would subtract the quantity of diverted gas (i.e. gas combusted at a coal unit) from the quantity of gas measured for the common pipe by using company records. The diverted gas would need to be accounted for in a separate configuration (unless not combusted or combusted in an exempt unit).

The tier required for the common pipe configuration is based on the maximum rated heat input capacity of the largest unit served by the common pipe.



See <u>Section 2.4</u> for instructions on how to report for Configuration Type 4.

Configuration Type 5 – Common Stack [98.36(c)(2)]

If multiple units vent to a common stack or duct and Tier 4 is used to calculate the CO₂ emissions for those units, the *common stack* configuration must be used. If only a single combustion unit vents to the stack and no process units are vented to the stack, then Configuration Type 2 (single unit using Tier 4) must be used.



See Section 2.5 for instructions on how to report for Configuration Type 5.

Configuration Type 6 – Alternative Part 75 Reporters [98.36(d)(2)]

This configuration represents the alternative calculation and reporting requirements available to certain units that report heat input year-round to EPA according to part 75. Units subject to Subpart D (electricity generating units that are subject to the Acid Rain Program or EGUs that are otherwise required to monitor and report to EPA CO₂ emissions year-round according to Part 75) are not eligible to report under this option. Units subject to Subpart D should report following the instructions for Subpart D.

If this option is selected in place of using one of the four tiers, the applicable calculation methodology specified in 98.33(a)(5) must be used to calculate CO_2 emissions and the reporting requirements specified in 98.36(d)(2) replace the requirements specified in 98.36(a)-(b).



See Section 2.6 for instructions on how to report for Configuration Type 6.

2.1 Configuration Type 1 Identification

Specific data components are required for Configuration Type 1. See the relevant components boxed in red in the figure below.

ghg:UnitsCDetailsDataType ghg:UnitIdentification + 13 (c)(2)(i), (c)(3)(i), and (d)(2)(i); 98.36(b)(2) ghg:IndividualUnitDetails ghg:SmallUnitAggregationDetails MRR Reference: 98,36(c)(1) /計 ghg:CommonPipeDetails MRR Reference: 98.36(c)(3) ghg:CommonStackDetails ghg:Part75Details 苷 ghg:PlantCode 98.36(b)(11), 98.36(c)(1)(xi) 98.36(c)(3)(x), 98.36(c)(2)(x), ghg:UnitsCDetails 98.36(d)


Figure 10
Units C Details for Configuration Type 1 Schema Diagram

Note: Data elements boxed in red are required.

Each single unit using Tiers 1, 2 or 3 to calculate emissions must be identified separately so that emissions information can be reported for a specific unit.

If a single unit switches from using Tiers 1-3 to Tier 4 during the year, a new configuration of Configuration Type 2 must be added to represent the period in which Tier 4 was used. Different unit names would need to be used for the two configurations even though the configurations are representing the same unit. Do not use quotes, apostrophes, or commas in unit names.

Figure 11
Configuration Type 1 Unit Identification Schema Diagram

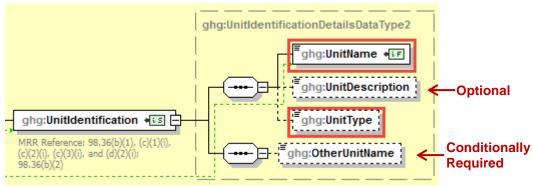

Note: Data elements boxed in red are required. Please see page 4 of this document for more information on conditionally required elements.

For configurations of <u>Type 1 (single unit using Tiers 1, 2 or 3)</u>, Subpart C requires the following identification information for each configuration:

- A unique unit name or identifier (e.g., a unit ID number) [98.36(b)(1)]
- An optional unit description or label [optional]
- A code representing the type of unit [98.36(b)(2)]

Table 7
Configuration Type 1 Unit Identification Data Element Definitions

Data Element Name	Description
UnitsCDetails	Parent Element: A collection of data elements containing details regarding each stationary fuel combustion unit configuration.
UnitIdentification	Parent Element: A collection of data elements containing the identity of each Subpart C reporting configuration.
UnitName	A user-defined identifier for this unit. Each unit or configuration must have a unique UnitName. [98.36(b)(1)]. Alphanumeric and most special characters may be used. Do not use quotes, apostrophes, or commas.
UnitDescription	An optional description or label.
UnitType	A code representing the type of unit. See the list of allowable unit type codes below. If the unit type is not provided in the list, report "OCS (Other combustion source)" and report the unit type using the OtherUnitName element. [98.36(b)(2)] See list of allowable values: PCWD (Pulverized coal, wall-fired, dry bottom) PCWW (Pulverized coal, wall-fired, wet bottom) PCT (Pulverized coal, tangentially-fired) PCO (Pulverized coal, other) CF (Cyclone Furnace) S (Stoker Boiler) BFB (Boiler, bubbling fluidized bed)

Data Element Name	Description
	CFB (Boiler, circulating fluidized bed)
	PFB (Boiler, pressurized fluidized bed)
	OFB (Fluidized bed, other)
	OB (Boiler, other)
	FLR (Flare)
	II (Incinerator, institutional)
	ICI (Incinerator, commercial and industrial)
	IGCC (Integrated gasification combined cycle)
	RICE (Reciprocating internal combustion engine)
	MWC (Municipal waste combustor)
	PRH (Process Heater)
	TODF (Thermal oxidizer, direct fired, no heat recovery)
	RTO (Regenerative thermal oxidizer)
	RCO (Regenerative catalytic oxidizer)
	CCCT (CC (Turbine, combined cycle))
	SCCT (CT (Turbine, simple cycle combustion))
	CH (Comfort heater)
	PD (Product or intermediate product dryer)
	K (Kiln)
	F (Furnace)
	C (Calciner)
	O (Oven)
	HWH (Heater, hot water)
	IFCE (Direct fired industrial food cooking equipment)
	NGLH (Heater, natural gas line)
	CatH (Heater, catalytic)
	HMH (Heater, heat medium for heat exchange)
	COB (By-product recovery coke oven battery combustion stacks (§98.172))
	FeFS (Subpart Q - flame suppression)
	FeFL (Subpart Q - ladle reheater)
	Q (Other Subpart Q combustion sources not otherwise listed.)
	HPPU (hydrogen production process units)
	OCS (Other combustion source)
OtherUnitName	Conditionally Required: Enter the unit type if "OCS (Other combustion source)" was entered for UnitType. Otherwise, do not report this element.

XML Excerpt 3 Example for Configuration Type 1 Unit Identification

Note: The code excerpt above is presented here to demonstrate the concept of reporting greenhouse gas emissions data.

For individual unit details, the value of the maximum rated heat input capacity of the unit must be reported.

ghg:IndividualUnitDetailsDataType

ghg:WeasurementDetailsDataType (extension)

ghg:MeasureValue

ghg:MaxRatedheatInputCapacity

MRR Reference: 98.36(b)(3)

Is value substitute data?

ghg:Number of months, weeks, days substitute data procedures were used

heatUOM

heatUOM

Figure 12
Configuration Type 1 Individual Unit Details Schema Diagram

Note: Data elements boxed in red are required. Please see page 4 of this document for more information on conditionally required elements.

For configurations of **Type 1** (single unit using Tiers 1, 2 or 3), report the following:

- Whether the IVT is used. Electricity Generating Units (EGUs) required to report inputs should select "N (EGU)".
- The measured value and heat unit of measure only. For heatUOM, use mmBtu/hr. [98.36(b)(3)]

Table 8
Configuration Type 1 Individual Unit Details Data Element Definitions

Data Element Name	Description
IndividualUnitDetails	Parent Element: A collection of data elements containing details about each individual stationary combustion unit that uses one of the four tiers and that is reporting as an individual unit under 98.36(b).
UseIvtIndicator	Indicate whether inputs are being entered using the Inputs Verifier Tool (IVT). Y N N (EGU)
MaxRatedheatInputCapacity	Parent Element: Maximum rated heat input capacity of the unit. Report the value in the child data element MeasureValue. For reporting year 2013 and onward, you may only set the units of measure to "mmBtu/hr" in the attribute heatUOM. For reporting years 2010, 2011 and 2012, you may use "Other" if there is another relevant unit of measure (other than mmBtu/hr).

XML Excerpt 4 Example for Configuration Type 1 Individual Unit Details

Note: The code excerpt above is presented here to demonstrate the concept of reporting greenhouse gas emissions data.



See <u>Section 3.1</u> for instructions on how to report emissions data for configuration type 1 units.

2.2 Configuration Type 2 Identification

Specific data components are required for Configuration Type 2. See the relevant components boxed in red in the figure below.


ghg:UnitsCDetailsDataType ghg:UnitIdentification 📲 🕂 ghg:IndividualUnitDetails ghg:SmallUnitAggregationDetails 🕀 MRR Reference: 98.36(c)(1) ≇∄ ghg:CommonPipeDetails MRR Reference: 98.36(c)(3) ghg:CommonStackDetails MRR Reference: 98.36(c)(2) ghg:Part75Details 🕀 ghg:PlantCode 1 MRR Reference: 98.36(b)(11), 98.36(c)(1)(xi) , 98.36(c)(2)(x), 98.360 ghg:UnitsCDetails 🖹 0...0

Figure 13
Units C Details for Configuration Type 2 Schema Diagram

Note: Data elements boxed in red are required.

Each single unit using Tier 4 (CEMS) to calculate emissions must be identified separately so that emissions information can be reported for a specific unit.

Figure 14
Configuration Type 2 Unit Identification Schema Diagram

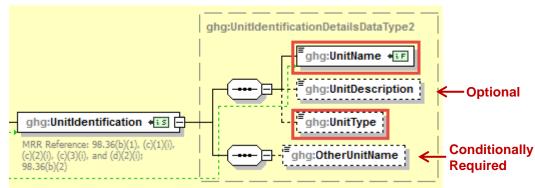

Note: Data elements boxed in red are required. Please see page 4 of this document for more information on conditionally required elements.

For configurations of <u>Type 2 (single unit using Tier 4)</u>, Subpart C requires the following identification information for each configuration:

- A unique unit name or identifier (e.g., a unit ID number) [98.36(b)(1)]
- An optional unit description or label [optional]
- A code representing the type of unit [98.36(b)(2)]

Table 9
Configuration Type 2 Unit Identification Data Element Definitions

Data Element Name	Description
UnitsCDetails	Parent Element: A collection of data elements containing details regarding each stationary fuel combustion unit configuration.
UnitIdentification	Parent Element: A collection of data elements containing the identity of each Subpart C reporting configuration.
UnitName	A user-defined identifier for this unit. Each unit or configuration must have a unique UnitName. [98.36(b)(1)] Alphanumeric and most special characters may be used. Do not use quotes, apostrophes, or commas.
UnitDescription	An optional description or label.
UnitType	A code representing the type of unit. See the list of allowable unit type codes below. If the unit type is not on the list, report "OCS (Other combustion source) and then report the unit type using the OtherUnitName element. [98.36(b)(2)] See list of allowable values: PCWD (Pulverized coal, wall-fired, dry bottom) PCWW (Pulverized coal, wall-fired, wet bottom) PCT (Pulverized coal, tangentially-fired) PCO (Pulverized coal, other) CF (Cyclone Furnace) S (Stoker Boiler) BFB (Boiler, bubbling fluidized bed) CFB (Boiler, circulating fluidized bed) PFB (Boiler, pressurized fluidized bed) OFB (Fluidized bed, other) OB (Boiler, other) FLR (Flare)

Data Element Name	Description
	II (Incinerator, institutional)
	ICI (Incinerator, commercial and industrial)
	IGCC (Integrated gasification combined cycle)
	RICE (Reciprocating internal combustion engine)
	MWC (Municipal waste combustor)
	PRH (Process Heater)
	TODF (Thermal oxidizer, direct fired, no heat recovery)
	RTO (Regenerative thermal oxidizer)
	RCO (Regenerative catalytic oxidizer)
	CCCT (CC (Turbine, combined cycle))
	SCCT (CT (Turbine, simple cycle combustion))
	CH (Comfort heater)
	PD (Product or intermediate product dryer)
	K (Kiln)
	F (Furnace)
	C (Calciner)
	O (Oven)
	HWH (Heater, hot water)
	IFCE (Direct fired industrial food cooking equipment)
	NGLH (Heater, natural gas line)
	CatH (Heater, catalytic)
	HMH (Heater, heat medium for heat exchange)
	COB (By-product recovery coke oven battery combustion stacks
	(§98.172))
	FeFS (Subpart Q - flame suppression)
	FeFL (Subpart Q - ladle reheater)
	Q (Other Subpart Q combustion sources not otherwise listed.)
	HPPU (hydrogen production process units)
	OCS (Other combustion source)
OtherUnitName	Conditionally Required: Enter the unit type if "OCS (Other combustion source)" was entered for UnitType. Otherwise, do not report this attribute.

XML Excerpt 5 Example for Configuration Type 2 Unit Identification

Note: The code excerpt above is presented here to demonstrate the concept of reporting greenhouse gas emissions data.

For individual unit details, the value of the maximum rated heat input capacity of the unit must be reported.

ghg:IndividualUnitDetails

ghg:MeasurementDetailsDataType (extension)

ghg:MeasureMalue

ghg:MeasureValue

ghg:MeasureValue

ghg:MeasureValue

ghg:MeasureValue

ghg:MeasureValue

ghg:MeasureValue

of ghg:MeasureValue

atributed

Number of months, weeks, days substituted
data procedures were used

otherheatUOM

One is required

Figure 15
Configuration Type 2 Individual Unit Details Schema Diagram

Note: Data elements boxed in red are required. Please see page 4 of this document for more information on conditionally required elements.

For configurations of **Type 2** (single unit using **Tier 4**), report the following:

- Whether the IVT is used. Electricity Generating Units (EGUs) required to report inputs should select "N (EGU)".
- The measured value and heat unit of measure only. For heatUOM, use mmBtu/hr for reporting year 2013 and onward. For reporting years 2010, 2011 and 2012, enter "Other" if there is another relevant unit of measure for other combustion sources, and enter the unit of measure for otherheatUOM. [98.36(b)(3)]

Table 10
Configuration Type 2 Individual Unit Details Data Element Definitions

Data Element Name	Description
IndividualUnitDetails	Parent Element: A collection of data elements containing details about each individual stationary combustion unit that uses one of the four tiers and that are reporting under 98.36(b).
UseIvtIndicator	Indicate whether inputs are being entered using the Inputs Verifier Tool (IVT).
	N N (EGU)

Data Element Name	Description
MaxRatedheatInputCapacity	Parent Element: Maximum rated heat input capacity of the unit. Report the value in the child data element MeasureValue. For reporting year 2013, for boilers, process heaters, and other combustion sources, you may only set the units of measure to "mmBtu/hr" in the attribute heatUOM. For reporting years 2010, 2011 and 2012, you may use "Other" if there is another relevant unit of measure (other than mmBtu/hr). Conditionally Required: For reporting year 2013, if the unit uses a measure other than "mmBtu/hr", report the actual unit of measure in the attribute otherheatUOM. For reporting years 2010, 2011, and 2012, if "Other" was entered in the attribute heatUOM, report the actual unit of measure in the attribute otherheatUOM. Otherwise, do not report this attribute.

XML Excerpt 6 Example for Configuration Type 2 Individual Unit Details

Note: The code excerpt above is presented here to demonstrate the concept of reporting greenhouse gas emissions data.



See Section 4.0 for instructions on how to report fuel data for configuration type 2 units.

2.3 Configuration Type 3 Identification

Specific data components are required for Configuration Type 3. See the relevant components boxed in red in the figure below.


ghg:UnitsCDetailsDataType ghg:UnitIdentification + 13 (c)(3)(i), and (d)(2)(i); ghg:IndividualUnitDetails MRR Reference: 98.36(b) ghg:SmallUnitAggregationDetails 133 ghg:CommonPipeDetails MRR Reference: 98,36(c)(3) ghg:CommonStackDetails MRR Reference: 98.36(c)(2) ghg:Part75Details 🛨 ghg:PlantCode MRR Reference: 98.36(b)(11), 98.36(c)(1)(xi))(x), 98.36(c)(2)(x) ghg:UnitsCDetails 98.36(d 98.36(d)(2)(iii)(J)

Figure 16
Units C Details for Configuration Type 3 Schema Diagram

Note: Data elements boxed in red are required.

Each group of units using the aggregation of units reporting alternative must be identified separately so that emissions information can be reported for a specific aggregation of units.

Figure 17
Configuration Type 3 Unit Identification Schema Diagram

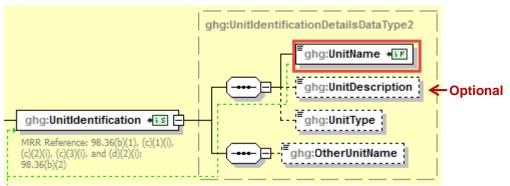

Note: Data elements boxed in red are required.

For configurations of <u>Type 3 (aggregation of units)</u>, Subpart C requires the following identification information for each configuration:

- A unique name or identifier that begins with the prefix "GP" [98.36(c)(1)(i)]
- An optional description or label [optional]

Table 11 Configuration Type 3 Unit Identification Data Element Definitions


Data Element Name	Description
UnitsCDetails	Parent Element: A collection of data elements containing details regarding each stationary fuel combustion unit configuration.
UnitIdentification	Parent Element: A collection of data elements containing the identity of each Subpart C reporting configuration.
UnitName	A user-defined identifier for this configuration. Each unit or configuration must have a unique UnitName. For an aggregation of units configuration, report the group name/ID beginning with the prefix "GP". [98.36(c)(1)(i)]. Alphanumeric and most special characters may be used. Do not use quotes, apostrophes, or commas.
UnitDescription	An optional description or label. For example, the scope of units included in this configuration may be reported here.

XML Excerpt 7 Example for Configuration Type 3 Unit Identification

Note: The code excerpt above is presented here to demonstrate the concept of reporting greenhouse gas emissions data.

For small unit aggregation details, the value of the highest maximum rated heat input capacity of any unit of the group must be reported.

Figure 18
Small Unit Aggregation Details Schema Diagram

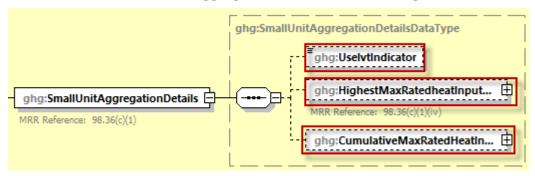

Note: Data elements boxed in red are required.

For configurations of **Type 3** (aggregation of units), report the following:

- Whether the IVT is used. Electricity Generating Units (EGUs) required to report inputs should select "N (EGU)".
- The highest maximum rated heat input capacity of any unit in the group including the measured value and heat unit of measure in mmBtu/hr only. [98.36(c)(1)(iv)]
- The cumulative maximum rated heat input capacity of for all units within the configuration that have a maximum rated heat input capacity greater than or equal to 10 mmBtu/hr including the measured value and heat unit of measure in mmBtu/hr only. [98.36(c)(1)(iv)]

Table 12 Small Unit Aggregation Details Data Element Definitions

Data Element Name	Description
SmallUnitAggregationDetails	Parent Element: A collection of data elements containing details about an aggregation of units reporting under 98.36(c)(1) as an aggregation of units configuration.
	Indicate whether inputs are being entered using the Inputs Verifier Tool (IVT).
UseIvtIndicator	Y N N (EGU)

HighestMaxRatedheatInputCapacity	Parent Element: The highest maximum rated heat input capacity of any unit in the group (aggregation of units configuration). Report the value in the child data element MeasureValue . Set the units of measure to "mmBtu/hr" in the attribute heatUOM . [98.36(c)(1)(iv)]
CumulativeMaxRatedHeatInputCapacity	Parent Element: For RY2017 and later report "Cumulative maximum rated heat input capacity of for all units within the configuration that have a maximum rated heat input capacity greater than or equal to 10 mmBtu/hr "mmBtu/hr" in the attribute heatUOM . [98.36(c)(1)(iv)]

XML Excerpt 8 Example for Small Unit Aggregation Details

Note: The code excerpt above is presented here to demonstrate the concept of reporting greenhouse gas emissions data.

The next step is to report emissions data for the configuration identified by referring to Section 3.2.



See <u>Section 3.2</u> for instructions on how to report emissions data for configuration type 3 units.

2.4 Configuration Type 4 Identification


Specific data components are required for Configuration Type 4. See the relevant components boxed in red in the figure below.

Figure 19
Units C Details for Configuration Type 4 Schema Diagram

Note: Data elements boxed in red are required.

Each group of units using the common pipe configuration reporting alternative must be identified separately so that emissions information can be reported for a specific group of units.

Figure 20 Configuration Type 4 Unit Identification Schema Diagram

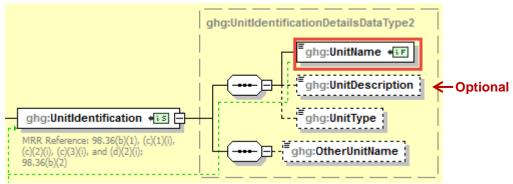

Note: Data elements boxed in red are required.

For configurations of **Type 4** (*common pipe configurations*), Subpart C requires the following identification information for each configuration:

- A unique name or identifier that begins with the prefix "CP" [98.36(c)(3)(i)]
- An optional description or label [optional]

Table 13
Configuration Type 4 Unit Identification Data Element Definitions


Data Element Name	Description
UnitsCDetails	Parent Element: A collection of data elements containing details regarding each stationary fuel combustion unit configuration.
UnitIdentification	Parent Element: A collection of data elements containing the identity of each Subpart C reporting configuration.
UnitName	A user-defined identifier for this configuration. Each configuration must have a unique UnitName. For common pipe configurations, report the common pipe name/ID beginning with the prefix "CP". [98.36(c)(3)(i)]. Alphanumeric and most special characters may be used. Do not use quotes, apostrophes, or commas.
UnitDescription	An optional description or label. For example, the scope of units included in this configuration may be reported here.

XML Excerpt 9 Example for Configuration Type 4 Unit Identification

Note: The code excerpt above is presented here to demonstrate the concept of reporting greenhouse gas emissions data

For common pipe details, the value of the highest maximum rated heat input capacity of any unit served by the common pipe must be reported.

Figure 21 Common Pipe Details Schema Diagram

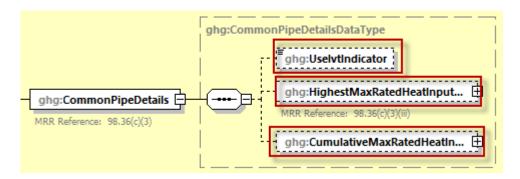

Note: Data elements boxed in red are required.

For configurations of Type 4 (common pipe configurations), the following is reported:

- Whether the IVT is used. Electricity Generating Units (EGUs) required to report inputs should select "N (EGU)".
- The highest maximum rated heat input capacity of any unit served by the common pipe including the measured value and heat unit of measure in mmBtu/hr only. [98.36(c)(1)(iv)]
- The cumulative maximum rated heat input capacity of for all units within the configuration that have a maximum rated heat input capacity greater than or equal to 10 mmBtu/hr including the measured value and heat unit of measure in mmBtu/hr only.

Table 14 Common Pipe Details Data Element Definitions

Data Element Name	Description
CommonPipeDetails	Parent Element: A collection of data elements containing details about units reporting under 98.36(c)(3) as a common pipe configuration.
UseIvtIndicator	Indicate whether inputs are being entered using the Inputs Verifier Tool (IVT). Y N N (EGU)
HighestMaxRatedHeatInputCapacity	Parent Element: The highest maximum rated heat input capacity of any unit served by the common pipe (common pipe unit configuration). Report the value in the child data element MeasureValue. Set the units of measure to "mmBtu/hr" in the attribute heatUOM. [98.36(c)(3)(iii)]
CumulativeMaxRatedHeatInputCapacity	Parent Element: For RY2017 and later report "Cumulative maximum rated heat input capacity of for all units within the configuration that have a maximum rated heat input capacity greater than or equal to 10 mmBtu/hr "mmBtu/hr" in the attribute heatUOM . [98.36(c)(1)(iv)]

XML Excerpt 10 Example for Common Pipe Details

Note: The code excerpt above is presented here to demonstrate the concept of reporting greenhouse gas emissions data.



See <u>Section 3.3</u> for instructions on how to report emissions data for configuration type 4 units

2.5 Configuration Type 5 Identification

Specific data components are required for Configuration Type 5. See the relevant components boxed in red in the figure below.

ghg:UnitsCDetailsDataType

ghg:UnitIdentification

MRR Reference: 98.36(b)(1),
(c)(1)(i), (c)(2)(i), (c)(3)(i), and
(d)(2)(i); 98.36(b)(2)

ghg:IndividualUnitDetails

MRR Reference: 98.36(b)

ghg:SmallUnitAggregationDetails

MRR Reference: 98.36(c)(1)

ghg:CommonPipeDetails

MRR Reference: 98.36(c)(3)

ghg:CommonStackDetails

MRR Reference: 98.36(c)(2)

ghg:PlantCode

Figure 22
Units C Details for Configuration Type 5 Schema Diagram

Note: Data elements boxed in red are required.

Each group of units using Tier 4 (CEMS) to calculate emissions and reporting under the monitored common stack or duct configurations reporting alternative must be identified separately so that emissions information can be reported for a specific group of units.

Figure 23
Configuration Type 5 Unit Identification Schema Diagram

ghg:UnitIdentificationDetailsDataType2

ghg:UnitIdentification

ghg:UnitIdentificat

Note: Data elements boxed in red are required.

For configurations of <u>Type 5 (monitored common stack or duct configurations)</u>, Subpart C requires the following identification information for each configuration:

- A unique name or identifier that begins with the prefix "CS" [98.36(c)(2)(i)]
- An optional description or label [optional]

Table 15
Configuration Type 5 Unit Identification Data Element Definitions

Data Element Name	Description
UnitsCDetails	Parent Element: A collection of data elements containing details regarding each stationary fuel combustion unit configuration.
UnitIdentification	Parent Element: A collection of data elements containing the identity of each Subpart C reporting configuration.
UnitName	A user-defined identifier for this configuration. Each configuration must have a unique UnitName. For common stack configurations, report the common stack name/ID beginning with the prefix "CS". [98.36(c)(2)(i)]. Alphanumeric and most special characters may be used. Do not use quotes, apostrophes, or commas.
UnitDescription	An optional description or label. For example, the scope of units included in this configuration may be reported here.

XML Excerpt 11 Example for Configuration Type 5 Unit Identification

Note: The code excerpt above is presented here to demonstrate the concept of reporting greenhouse gas emissions data.

For the combined maximum rated heat input capacity, report the measured value and heat unit of measure in mmBtu/hr only.

ghg:CommonStackDetails

MRR Reference: 96.36(c/(2)

MRR Reference: 96.36(c/(2))

ghg:CommonStackDetails

ghg:CommonStackDetails

ghg:MeasurementDetailsDataType (extension)

ghg:MeasureValue

ghg:MeasureValue

ghg:MeasureValue

ghg:MeasureValue

ghg:MeasureValue

ghg:MeasureValue

ghg:MeasureValue

afgg:NumberofTimes SubstitutedIndicator

Is value substitute data?

Number of months, weeks, days substituted

Required

attributes

heattOM

heattOM

Figure 24 Common Stack Details Schema Diagram

Note: Data elements boxed in red are required. Please see page 4 of this document for more information on conditionally required elements.

For configurations of Type 5 (monitored common stack or duct configurations) the following information must be reported:

- Whether IVT is used. Electricity Generating Units (EGUs) required to report inputs should select "N (EGU)".
- The number of units sharing the common stack [98.36(c)(2)(ii)]

The combined maximum rated heat input capacity of the units sharing the common stack in mmBtu/hr [98.36(c)(2)(iii)]

Table 16 Common Stack Details Data Element Definitions

Data Element Name	Description
CommonStackDetails	Parent Element: A collection of data elements containing details about units reporting under 98.36(c)(2) as a common stack or duct configuration.
UseIvtIndicator	Indicate whether inputs are being entered using the Inputs Verifier Tool (IVT). Y N N (EGU)
NumberofUnits	Number of units sharing the common stack or duct. Report "1" when the flue gas flowing through the stack includes combustion products and/or process off-gases and all of the effluent comes from a single unit. [98.36(c)(2)(ii)]

Data Element Name	Description
	Parent Element: Combined maximum rated heat input capacity of the units sharing the common stack or duct.
CombinedMaxRatedHeatInputCapacity	Conditionally Required: This data element is required only when all of the units sharing the common stack are stationary fuel combustion units (monitored common stack or duct configuration). Report the value in the child data element MeasureValue. Set the units of measure to "mmBtu/hr" in the attribute heatUOM. [98.36(c)(2)(iii)]

XML Excerpt 12 Example for Common Stack Details

Note: The code excerpt above is presented here to demonstrate the concept of reporting greenhouse gas emissions data.



See <u>Section 4.0</u> for instructions on how to report fuel data for the configuration identified.

2.6 Configuration Type 6 Identification


Specific data components are required for Configuration Type 6. See the relevant components boxed in red in the figure below.



Have you previously filed a report with Part 75 data (for reporting year 2010, 2011, 2012, or 2013)?

If yes, please note that the placement of Part75Details data elements has been moved in the current version of the schema, so you must modify your XML file structure to reflect the revised location.

Figure 25
Units C Details for Configuration Type 6 Schema Diagram

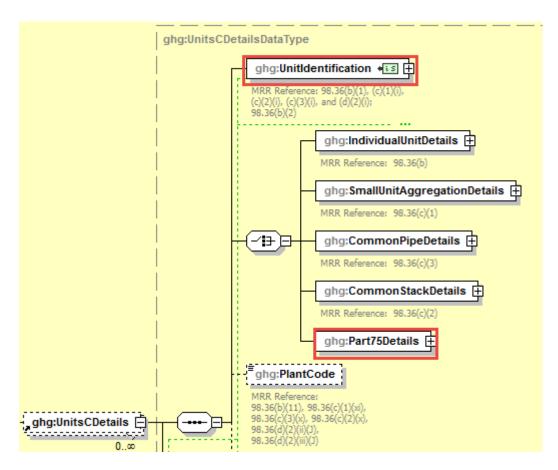

Note: Data elements boxed in red are required.

Each unit, stack or pipe using the alternative CO₂ mass emissions calculation methods provided in 98.33(a)(5) must be identified separately so that emissions information can be reported for the respective unit, stack or pipe.

Figure 26
Configuration Type 6 Unit Identification Schema Diagram

ghg:UnitIdentificationDetailsDataType2

ghg:UnitIdentification

ghg:UnitIdentificat

Note: Data elements boxed in red are required.

For configurations of **Type 6** (year-round Part 75 heat input reporters), Subpart C requires the following identification information for each configuration:

- Unit, stack or pipe ID numbers. Use the exact same unit, common stack, common pipe or multiple stack identification numbers that represent the monitored locations (e.g., 1, 2, CS001, MS1A, CP001, etc.) that are reported under 40 CFR 75.64 [98.36(d)(2)(i)]
- An optional description or label [optional]

Table 17
Configuration Type 6 Unit Identification Data Element Definitions

Data Element Name	Description
UnitsCDetails	Parent Element: A collection of data elements containing details regarding each stationary fuel combustion unit configuration.
UnitIdentification	Parent Element: A collection of data elements containing the identity of each Subpart C reporting configuration.
UnitName	For part 75 units, use exactly the same name/ID that is reported under \$75.64 and that represents the monitored location. [98.36(d)(2)(i)]. Alphanumeric and most special characters may be used. Do not use quotes, apostrophes, or commas.
UnitDescription	An optional description or label. For example, the scope of units included in this configuration may be reported here.

XML Excerpt 13 Example for Configuration Type 6 Unit Identification

Note: The code excerpt above is presented here to demonstrate the concept of reporting greenhouse gas emissions data.

See <u>Section 3.4</u> for instructions on how to report emissions data for configuration type 6 units.

2.7 Configuration Plant Code

This section of the Subpart C XML reporting instructions covers requirements for reporting the Plant Code associated with the unit. Plant Code is a required data element for reporting years 2013 onward for Configuration Types 1 through 6. (98.36(b)(11), 98.36(c)(1)(xi), 98.36(c)(2)(xi), 98.36(c)(3)(x), 98.36(d)(2)(ii)(J), and 98.36(d)(2)(iii)(J)



Is there a Plant ID code assigned by the Department of Energy's Energy Information Administration (also referred to as the "ORIS code", "ORISPL code", "Facility ID", or "Facility code", among other names.) associated with your unit?

If yes, use this Plant ID code as the PlantCode for your unit.

If no, use the code beginning with "88" assigned by the EPA's Clean Air Markets Division for electronic reporting as the PlantCode for your unit.

ghg:UnitsCDetailsDataType ghg:UnitIdentification MRR Reference: 98.36(b)(1) (c)(1)(i), (c)(2)(i), (c)(3)(i), and (d)(2)(i); 98.36(b)(2) ghg:IndividualUnitDetails 🗐 MRR Reference: 98.36(b) ghg:SmallUnitAggregationDetails 🛨 MRR Reference: 98.36(c)(1) ′∄ghg:CommonPipeDetails 🛨 MRR Reference: 98.36(c)(3) ghg:CommonStackDetails 🖪 MRR Reference: 98.36(c)(2) ghg:Part75Details 🛨 ghg:PlantCode MRR References 98.36(b)(11), 98.36(c)(1)(xi) 98.36(c)(2)(x) UnitsCDetails

Figure 27
Configuration Plant Code Schema Diagram

Note: Data elements boxed in red are required.

Table 18
Configuration Plant Code Data Element Definitions

Data Element Name	Description
UnitsCDetails	Parent Element: A collection of data elements containing details regarding each stationary fuel combustion unit configuration.
PlantCode	The Plant ID associated with the unit (98.6). This code must be a six-digit integer. Multiple comma delimited plant codes may be included.

XML Excerpt 14 Example for Configuration Type 1 Configuration Level Emissions

```
<ghg:SubpartC>
...
<ghg:PlantCode>881111, 881112</ghg:PlantCode>
...
<ghg:SubpartC>
```

3.0 Configuration Level Emissions Information


This section of the Subpart C XML reporting instructions covers the requirements for reporting the configuration level emissions information, such as total sorbent emissions, total biogenic emissions and total fossil fuel emissions.

Note: The schema is ordered such that data elements for reporting configuration level emissions data are placed in two areas within the schema structure. Section 3.0 covers the configuration level emissions information referenced above in the first paragraph on this page. Section 5.0 covers the following additional configuration level information requirements (see figure below):

- Biogenic CO₂ verification data. This applies to configuration types 1-5.
- Tier 4 details. This applies to configuration types 2 and 5.

<u>Section 4</u> of these instructions describes the requirements for reporting fuel-specific emissions. Note that the reporting of both configuration-level and fuel-specific emissions are required for all configurations types. Also, as with the identification information, each configuration has unique reporting requirements for emissions information.

Figure 28
Configuration Level Emissions Data

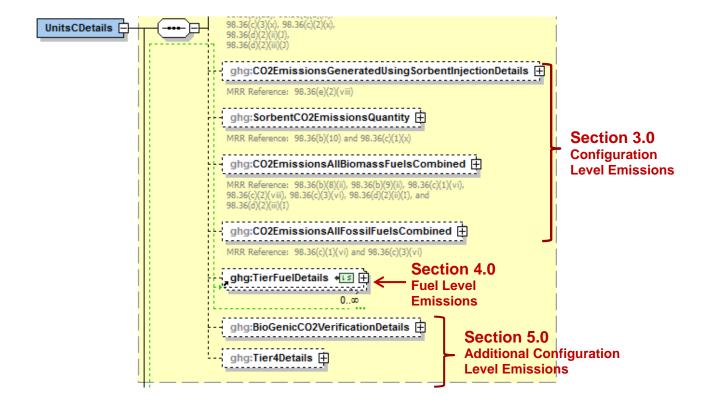


Configuration Type 1 Configuration Level Emissions 3.1

For configurations of **Type 1** (single unit using Tiers 1, 2 or 3), Subpart C requires the following emissions information aggregated at the configuration-level:

- Conditionally Required: If CO₂ emissions that are not monitored by a CEMS are generated from sorbent injection, then report the following information: [98.36(e)(2)(viii)]
 - The total amount of sorbent used during the reporting year.
 - The molecular weight of the sorbent.
 - The ratio ("R") used in Equation C-11.
- The total annual CO_2 mass emissions from sorbent. [98.36(b)(10)]
- The total annual biogenic CO₂ mass emissions. [98.36(b)(8)(ii)]
- Biogenic CO₂ verification details. See <u>section 5.1</u> for instructions on how to report sample analysis results if ASTM methods D7459-08 and D6866-08 to determine the biogenic portion of the annual CO₂ emissions.

Figure 29

Configuration Type 1 Configuration Level Emissions

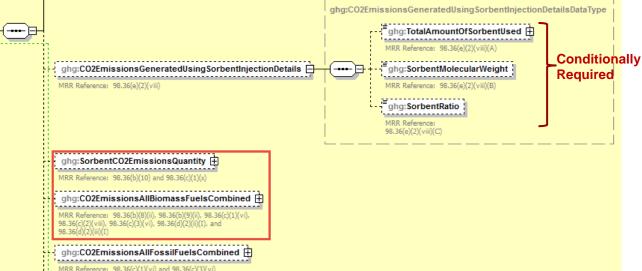

Note: Data elements boxed in red are required.

Table 19 Configuration Type 1 Configuration Level Emissions Data Element Definitions

Data Element Name	Description
CO2EmissionsGeneratedUsingSorbent InjectionDetails	Parent Element: A collection of data elements containing details of the sorbent CO ₂ emission calculation inputs.
TotalAmountOfSorbentUsed	The amount of sorbent used in acid gas control devices during the year. Report the value in the child data element CalculatedValue . Report zero if sorbent is not used. Set the units of measure to "Short tons" in the attribute massUOM . [98.36(e)(2)(viii)(A)]
SorbentMolecularWeight	The molecular weight of the sorbent. Report zero if sorbent is not used. [98.36(e)(2)(viii)(B)]
SorbentRatio	The ratio "R" in Equation C-11. "R" is the ratio of moles of CO2 released from the sorbent per mole of the acid gas species removed. A default factor of 1 is used where the sorbent is CaCO3 and the acid gas is SO2. Report zero if sorbent is not used. [98.36(e)(2)(viii)(C)]
SorbentCO2EmissionsQuantity	Parent Element: The calculated annual CO ₂ emissions from sorbent. Report the value in the child data element CalculatedValue. Set the units of measure to "Metric Tons" in the attribute massUOM. [98.36(b)(10)]
CO2EmissionsAllBiomassFuelsCombined	Parent Element: Total annual biogenic CO ₂ mass emissions for a configuration. Report the value in the child data element CalculatedValue . Set the units of measure to "Metric Tons" in the attribute massUOM. [98.36(b)(8)(ii)]

XML Excerpt 15 Example for Configuration Type 1 Configuration Level Emissions

Note: The code excerpt above is presented here to demonstrate the concept of reporting greenhouse gas emissions data.

See <u>Section 4.0</u> for instructions on how to report fuel data for configuration type 1 units.

3.2 Configuration Type 2 Configuration Level Emissions

For configurations of <u>Type 2 (single unit using Tier 4)</u>, Subpart C requires the following information aggregated at the configuration-level.

- Biogenic CO₂ verification details. See <u>section 5.1</u> for instruction on how to report sample analysis results if ASTM methods D7459-08 and D6866-08 were used to determine the biogenic portion of the annual CO₂ emissions.
- Tier 4 details. See <u>section 5.2</u> for instructions on how to report configuration-level emissions information for units using the Tier 4 methodology.

3.3 Configuration Type 3 Configuration Level Emissions

For configurations of <u>Type 3 (aggregation of units)</u>, Subpart C requires the following emissions information aggregated at the configuration-level:

- **Conditionally Required:** If CO₂ emissions that are not monitored by a CEMS are generated from sorbent injection, then report the following information: [98.36(e)(2)(viii)]
 - o The total amount of sorbent used during the reporting year.
 - o The molecular weight of the sorbent.
 - o The ratio ("R") used in Equation C-11.
- The total annual CO_2 mass emissions from sorbent. [98.36(c)(1)(x)]
- The total annual biogenic CO₂ mass emissions. [98.36(c)(1)(vi)]
- The total annual CO_2 mass emissions from the combustion of fossil fuels. [98.36(c)(1)(vi)]
- Biogenic CO₂ verification details. See <u>section 5.1</u> for instructions on how to report sample analysis results if ASTM methods D7459-08 and D6866-08 to determine the biogenic portion of the annual CO₂ emissions.

ghg:C02EmissionsGeneratedUsingSorbentInjectionDetails

ghg:C02EmissionsGeneratedUsingSorbentInjectionDetails

MRR Reference: 98.36(e)(2)(viii)(A)

Conditionally Required

MRR Reference: 98.36(e)(2)(viii)(B)

MRR Reference: 98.36(e)(2)(viii)(B)

MRR Reference: 98.36(e)(2)(viii)(C)

ghg:C02EmissionsQuantity

MRR Reference: 98.36(e)(2)(viii)(C)

ghg:C02EmissionsAllBiomassFuelsCombined

MRR Reference: 98.36(b)(10) and 98.36(c)(1)(v).

98.36(c)(2)(viii), 98.36(c)(3)(vi), 98.36(c)(1)(v).

98.36(c)(2)(viii), 98.36(c)(3)(vi), 98.36(c)(1)(vi).

ghg:C02EmissionsAllFossilFuelsCombined

ghg:C02EmissionsAllFossi

Figure 30 Configuration Type 3 Configuration Level Emissions Schema Diagram

Note: Data elements boxed in red are required.

Table 20 Configuration Type 3 Configuration Level Emissions Data Element Definitions

Data Element Name	Description
CO2EmissionsGeneratedUsingSorbent InjectionDetails	Parent Element: A collection of data elements containing details of the sorbent CO ₂ emission calculation inputs.
TotalAmountOfSorbentUsed	The amount of sorbent used in acid gas control devices during the year. Report the value in the child data element CalculatedValue . Report zero if sorbent is not used. Set the units of measure to "Short tons" in the attribute massUOM . [98.36(e)(2)(viii)(A)]
SorbentMolecularWeight	The molecular weight of the sorbent. Report zero if sorbent is not used. [98.36(e)(2)(viii)(B)]
SorbentRatio	The ratio "R" in Equation C-11. "R" is the ratio of moles of CO2 released from the sorbent per mole of the acid gas species removed. A default factor of 1 is used where the sorbent is CaCO3 and the acid gas is SO2. Report zero if sorbent is not used. [98.36(e)(2)(viii)(C)]
SorbentCO2EmissionsQuantity	Parent Element: The calculated annual CO ₂ emissions from sorbent. Report the value in the child data element CalculatedValue. Set the units of measure to "Metric Tons" in the attribute massUOM. [98.36(b)(10)]

Data Element Name	Description
CO2EmissionsAllBiomassFuelsCombined	Parent Element: Total annual biogenic CO ₂ mass emissions for a configuration. Report the value in the child data element CalculatedValue . Set the units of measure to "Metric Tons" in the attribute massUOM . [98.36(b)(8)(ii)]
CO2EmissionsAllFossilFuelsCombined	Parent Element: The calculated annual CO ₂ mass emissions from the combustion of all fossil fuels for a configuration. Report the value in the child data element CalculatedValue . Set the units of measure to "Metric Tons" in the attribute massUOM . [98.36(c)(1)(vi)]

XML Excerpt 16 Example for Configuration Type 3 Configuration Level Emissions

Note: The code excerpt above is presented here to demonstrate the concept of reporting greenhouse gas emissions data.




See Section 4.0 for instructions on how to report fuel data for the configuration identified.

3.4 Configuration Type 4 Configuration Level Emissions

For configurations of <u>Type 4 (non-CEMS group of units sharing common fuel supply pipe)</u>, Subpart C requires the following emissions information aggregated at the configuration-level:

- The total annual biogenic CO₂ mass emissions. [98.36(c)(3)(vi)]
- The total annual CO₂ mass emissions from the combustion of fossil fuels. [98.36(c)(3)(vi)]
- Biogenic CO₂ verification details. See <u>section 5.1</u> for instructions on how to report sample analysis results if ASTM methods D7459-08 and D6866-08 to determine the biogenic portion of the annual CO₂ emissions.

Figure 31
Configuration Type 4 Configuration Level Emissions Schema Diagram

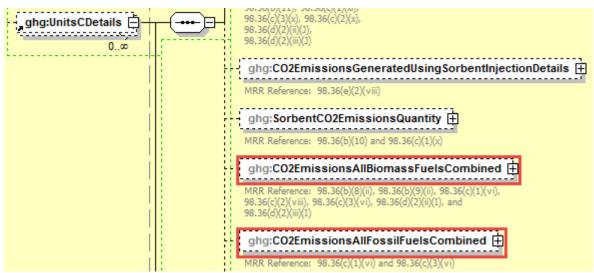

Note: Data elements boxed in red are required.

Table 21
Configuration Type 4 Configuration Level Emissions Data Element Definitions

Data Element Name	Description
CO2EmissionsAllBiomassFuelsCombined	Parent Element: Total annual biogenic CO ₂ mass emissions for a configuration. Report the value in the child data element CalculatedValue . Set the units of measure to "Metric Tons" in the attribute massUOM .
CO2EmissionsAllFossilFuelsCombined	Parent Element: The calculated annual CO ₂ mass emissions from the combustion of all fossil fuels for a configuration. Report the value in the child data element CalculatedValue. Set the units of measure to "Metric Tons" in the attribute massUOM.

XML Excerpt 17 Example for Configuration Type 4 Configuration Level Emissions

Note: The code excerpt above is presented here to demonstrate the concept of reporting greenhouse gas emissions data.



See Section 4.0 for instructions on how to report fuel data for the configuration identified.

3.5 Configuration Type 5 Configuration Level Emissions

For configurations of <u>Type 5 (units with a common stack or duct using Tier 4)</u>, Subpart C requires additional information aggregated at the configuration-level.


- Biogenic CO₂ verification details. See <u>section 5.1</u> for instructions on how to report sample analysis results if ASTM methods D7459-08 and D6866-08 were used to determine the biogenic portion of the annual CO₂ emissions.
- Tier 4 details. See <u>section 5.2</u> for instructions on how to report configuration-level emissions information for units using the Tier 4 methodology.

3.6 Configuration Type 6 Configuration Level Emissions

For configurations of <u>Type 6 (year-round Part 75 heat input reporters)</u>, Subpart C requires the following additional information aggregated at the configuration-level:

- The total annual biogenic CO₂ mass emissions. [98.36(d)(2)(ii)(I), 98.36(d)(2)(iii)(I)]
- Additional configuration-level emissions information for units using the Part 75 methodology.

Figure 32 Configuration Type 6 Configuration Level Emissions Schema Diagram

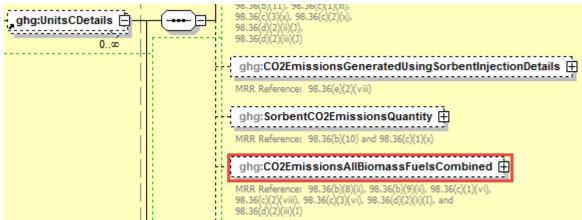

Note: Data elements boxed in red are required.


Table 22 Configuration Type 6 Configuration Level Emissions Data Element Definitions

Data Element Name	Description
CO2EmissionsAllBiomassFuelsCombined	Parent Element: Total annual biogenic CO ₂ mass emissions for a configuration. Report the value in the child data element CalculatedValue . Set the units of measure to "Metric Tons" in the attribute massUOM .

XML Excerpt 18 Example for Configuration Type 6 Configuration Level Emissions

Note: The code excerpt above is presented here to demonstrate the concept of reporting greenhouse gas emissions data.

Figure 33 Part 75 Details Schema Diagram

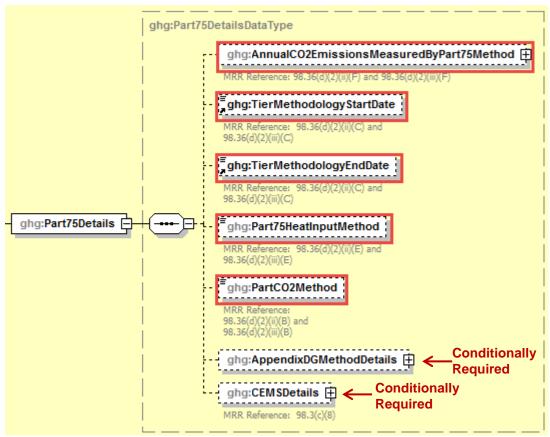

Note: Data elements boxed in red are required. Please see page 4 of this document for more information on conditionally required elements.

For configurations of <u>Type 6 (year-round Part 75 heat input reporters)</u>, Subpart C requires the following additional information aggregated at the configuration-level:

- The total annual CO₂ mass emissions at the monitored location [98.36(d)(2)(ii)(F), 98.36(d)(2)(iii)(F)]
- The methodology start date and end date [98.36(d)(ii)(C)-(D), 98.36(d)(iii)(C)-(D)]
- An indication of the Part 75 heat input method used (Appendix D method, Low Mass Emissions calculation method in 40 CFR 75.19 or CEMS calculation method) [98.36(d)(2)(ii)(E), 98.36(d)(2)(iii)(E)]
- The Part 75 methodology used to calculate the CO₂ mass emissions (Appendix D and G calculation method, Low Mass Emissions calculation method in 40 CFR 75.19 or CEMS calculation method) [98.36(d)(2)(ii)(B), 98.36(d)(2)(iii)(B)].


Table 23 Part 75 Details Data Element Definitions

Data Element Name	Description
Part75Details	Parent Element (Conditionally Required): A collection of data elements containing information for certain Part 75 units that use the alternative calculation methods in 98.33(a)(5).
AnnualCO2EmissionsMeasuredByPart75Method	The total annual CO ₂ emissions measured at the monitored location using the applicable Part 75 methodology (include both biogenic and non-biogenic CO ₂). Report the value in the child data element CalculatedValue . Set the units of measure to "Metric Tons" in the attribute massUOM .
TierMethodologyStartDate	The methodology start date for the specified reporting configuration (YYYY-MM-DD).
TierMethodologyEndDate	The methodology end date for the specified reporting configuration (YYYY-MM-DD).
Part75HeatInputMethod	The method used to measure the Part 75 heat input. See list of allowable values: Appendix D LME40 CFR 75.19 CEMS
PartCO2Method	The Part 75 method used to calculate the CO ₂ emissions. See list of allowable values: Appendix D and G calculation method § 98.33(a)(5)(i) LME calculation method in 40 CFR 75.19 § 98.33(a)(5)(ii) CEMS calculation method § 98.33(a)(5)(iii)

XML Excerpt 19 Example for Part 75 Details

Note: The code excerpt above is presented here to demonstrate the concept of reporting greenhouse gas emissions data.

Figure 34
Appendix D and G Calculation Method Details Schema Diagram

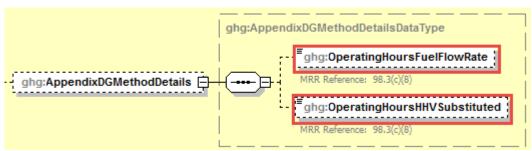

Note: Data elements boxed in red are required.



Is the Appendix D and G calculation method the Part 75 methodology used to calculate CO₂ emissions?

If the Part 75 methodology used to calculate the CO₂ mass emissions is Appendix D and G calculation method, then the following information is required:

- Total number of operating hours during the year that fuel flow rate data was missing [98.3(c)(8)]
- Total number of operating hours during the year that high heating value data was missing [98.3(c)(8)]


Table 24
Appendix D and G Calculation Method Details Data Element Definitions

Data Element Name	Description
AppendixDGMethodDetails	Parent Element (Conditionally Required): A collection of data elements to report for each unit or stack for which the facility selects "Appendix D & G Calculation Method" as the Part 75 methodology used to determine CO ₂ mass emissions
OperatingHoursFuelFlowRate	Total number of operating hours during the year that fuel flow rate data was missing.
OperatingHoursHHVSubstituted	Total number of operating hours during the year that high heating value data was missing.

XML Excerpt 20 Example for Appendix D and G Calculation Method Details

Note: The code excerpt above is presented here to demonstrate the concept of reporting greenhouse gas emissions data.

Figure 35 CEMS Details Schema Diagram

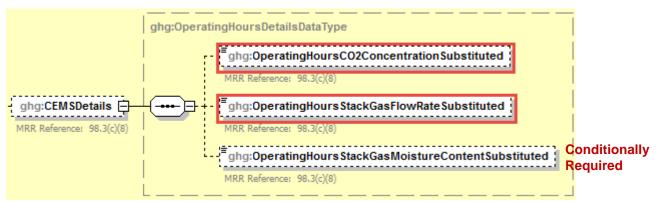

Note: Data elements boxed in red are required. Please see page 4 of this document for more information on conditionally required elements.



Is the CEMS calculation method the Part 75 methodology used to calculate CO2 emissions?

If the Part 75 methodology used to calculate the CO₂ mass emissions is CEMS calculation method, then for configurations of <u>Type 6 (year-round Part 75 heat input reporters)</u>, Subpart C requires the following additional information aggregated at the configuration-level:

- The total number of source operating hours in the reporting year that the CO₂ concentration parameter was missing (if an O₂ monitor is used to calculate CO₂ concentration, report missing data for the O₂ monitor here) [98.36(e)(2)(vi)(C), 98.3(c)(8)]
- The total number of source operating hours in the reporting year that the stack gas flow rate parameter was missing [98.36(e)(2)(vi)(C), 98.3(c)(8)]
- The total number of source operating hours in the reporting year that the moisture content parameter was missing (if a continuous monitor is in use) [98.36(e)(2)(vi)(C), 98.3(c)(8)]

Table 25
CEMS Details Data Element Definitions

Data Element Name	Description
CEMSDetails	Parent Element (Conditionally Required): A collection of data elements pertaining to the number of hours missing data procedures were for each unit or stack in which the facility selects "CEMS" as the Part 75 methodology used to determine CO ₂ mass emissions
OperatingHoursCO2ConcentrationSubstituted	The total operating hours in which a substitute data value was used in the emissions calculations for the CO ₂ concentration parameter.


Data Element Name	Description
OperatingHoursStackGasFlowRateSubstituted	The total operating hours in which a substitute data value was used in the emissions calculations for the stack gas flow rate parameter.
OperatingHoursStackGasMoistureContentSubstituted	Conditionally Required: If moisture correction is required and a continuous moisture monitor is used, the total operating hours in which a substitute data value was used in the emissions calculations for the stack gas moisture content parameter. Otherwise, do not report this element.

XML Excerpt 21 **Example for CEMS Details**

<ghg:CEMSDetails>

- <ghg:OperatingHoursCO2ConcentrationSubstituted>1000</ghg:OperatingHoursCO2ConcentrationSubstituted>
- <ghg:OperatingHoursStackGasFlowRateSubstituted > 10 / operatingHoursStackGasFlowRateSubstituted > 10 / operatingHoursStackGasMoistureContentSubstituted > 1 / operatingHoursStackGasMoistureContentSubstituted > 1 / operatingHoursStackGasMoistureContentSubstituted > 1 </ghg:CEMSDetails>
- </ghg:Part75Details>

Note: The code excerpt above is presented here to demonstrate the concept of reporting greenhouse gas emissions data.



See Section 4.0 for instructions on how to report fuel data for the configuration identified.

See Section 6.0 for instructions on how to report facility level roll-up emissions.


4.0 Fuel Level Emissions by Configuration Type

For configurations of all types, Subpart C requires you to identify the following for **each configuration**:

• The fuel types combusted during the reporting year [98.36(b)(4), 98.36(c)(1)(v), 98.36(c)(2)(iv), 98.36(c)(3)(iv), 98.36(d)(2)(ii)(A) and 98.36(d)(2)(iii)(A)]

Separately report each fuel combusted in the configuration during the report year along with the associated emissions information. The required information for each fuel will depend on which tier was used to calculate CO₂ emissions.

Figure 36
Tier Fuel Details Schema Diagram

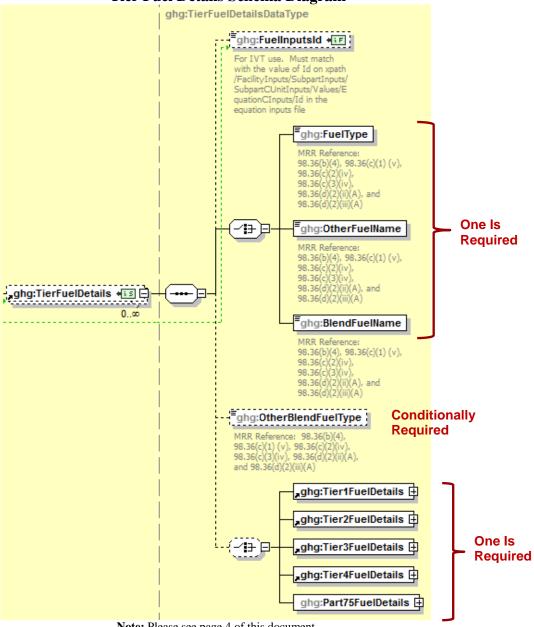

Note: Please see page 4 of this document for more information on conditionally required elements.

Report the fuel type. (See list of allowable fuel types.) If the fuel type does not appear in the list and the use of Tier 3 is required, then specify its name using the "OtherFuelName" element. If a blend of

fuels was combusted and the fuels cannot be reported individually, report the blend name using "BlendFuelName".

The user should refer to 98.33(b) to determine which Tier is required for each fuel type at the configuration.

Note that Tiers 1-3 could only apply to Configurations of <u>Type 1 (single unit using Tiers 1, 2 or 3)</u>, <u>Type 3 (aggregation of units)</u> and <u>Type 4 (common pipe)</u>. For each fuel in a configuration, the user will specify which tier is used and which equation was used for that fuel.

For Configurations of <u>Type 2 (single unit Using Tier 4) or Type 5 (common stack or duct)</u>, the user will report the applicable information for each fuel under the Tier4FuelDetails node.

For Configurations of <u>Type 6 (Part 75 heat input reporters)</u>, the user will report the applicable information for each fuel under the Part75FuelDetails node.

Table 26
Tier Fuel Details Data Element Definitions

1	1er Fuel Details Data Element Definitions
Data Element Name	Description
TierFuelDetails	Parent Element: A collection of data elements containing information regarding the types of fuels combusted in the reporting configuration and broken out by CO ₂ calculation methodology.
FuelInputsID	Conditionally Required: If using the Inputs Verifier Tool for uploading inputs, enter the value of the ID on the xpath for the IVT inputs file: FacilityInputs/SubpartInputs/SubpartCUnitInputs/Values/EquationCInputs/Id Important: The ID reported in the FuelInputsID data element must match the Id in the IVT file at the xpath shown above EXACTLY.
FuelType	Conditionally Required: If the fuel type is on the list of allowable values, then specify the type of fuel combusted in the reporting configuration during the report year. See list of allowable fuel types below. If reporting a fuel not on the list or a blended fuel, then specify its name using one of the following data elements, "OtherFuelName" or "BlendFuelName" as appropriate, and do not report this data element. Anthracite Bituminous Subbituminous Lignite Coal Coke Mixed (Commercial sector) Mixed (Industrial coking) Mixed (Industrial sector) Mixed (Electric Power sector) Mixed (Electric Power sector) Plastics Petroleum Coke Municipal Solid Waste Tires Wood and Wood Residuals (dry basis) Agricultural Byproducts Peat Distillate Fuel Oil No. 1 Distillate Fuel Oil No. 2 Distillate Fuel Oil No. 2

	Desided Fool Off No. 5
	Residual Fuel Oil No. 5
	Residual Fuel Oil No. 6
	Used Oil
	Kerosene
	Liquefied petroleum gases (LPG)
	Propylene
	Ethane
	Ethanol (100%)
	Ethylene
	Isobutane
	Isobutylene
	Butane
	Butylene
	Naphtha (<401 deg F)
	Natural Gasoline
	Other Oil (>401 deg F)
	Pentanes Plus
	Petrochemical Feedstocks
	Petroleum Coke
	Special Naphtha
	Unfinished Oils
	Heavy Gas Oils
	Lubricants
	Motor Gasoline
	Aviation Gasoline
	Kerosene-Type Jet Fuel
	Asphalt and Road Oil
	Crude Oil
	Propane
	Ethanol
	Biodiesel (100%)
	Rendered Animal Fat
	Vegetable Oil
	Natural Gas (Weighted U.S. Average)
	Blast Furnace Gas
	Coke Oven Gas
	Propane Gas
	Fuel Gas
	Landfill Gas
	Solid Byproducts
	Other Biomass Gases
Od. F. Di.	Conditionally Required: Name of the specific fuel if not found in the list of
OtherFuelName	allowable values and the use of Tier 3 is required. Otherwise, do not report
	this element.
PlandFualNama	Conditionally Required: Name of the specific fuel blend if the blended
BlendFuelName	fuels cannot be reported individually. Otherwise, do not report this element.
	Conditionally Required: If OtherFuelName or BlendFuelName is reported,
	the type of other fuel or blend fuel must be specified. Otherwise, do not
	report this element.
OtherBlendFuelType	Other (gas)
	Other (liquid)
	Other (solid)
	Blend (gas)
	Blend (liquid)
	Blend (solid)

XML Excerpt 22 Example for Tier Fuel Details

```
<ghg:TierFuelDetails>
  <ghg:OtherFuelName>Recovered liquid</ghg:OtherFuelName>
  <ghg:OtherBlendFuelType>Other (liquid)</ghg:OtherBlendFuelType>
</ghg:TierFuelDetails>
```

Note: The code excerpt above is presented here to demonstrate the concept of reporting greenhouse gas emissions data.




Which calculation methodology will you use to calculate fuel emissions?

The calculation methodologies are as follows:

- <u>Tier 1</u> includes Equation C-1, Equation C-1a and Equation C-1b [98.33(a)(1)]
- $\frac{\text{Tier 2}}{\text{Tier 2}}$ includes Equation C-2a and Equation C-2c [98.33(a)(2)]
- <u>Tier 3</u> includes Equation C-3, Equation C-4 and Equation C-5 [98.33(a)(3)]
- $\frac{\text{Tier 4}}{\text{Tier 4}}$ by using quality-assured data from CEMS [98.33(a)(4)]
- Part 75 alternative methods for certain units subject to Part 75 [98.33(a)(5)]

4.1 Tier 1 Fuel Details

Figure 37
Tier 1 Fuel Details Schema Diagram

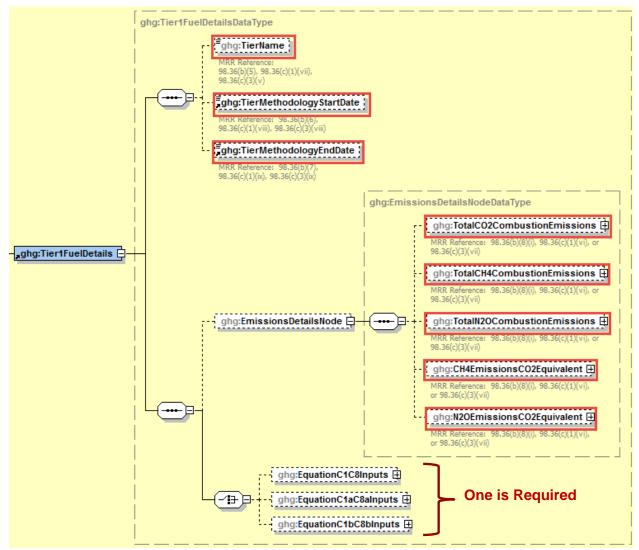

Note: Data elements boxed in red are required.

For each fuel type (including biomass fuel(s)) in a configuration that uses $\underline{\text{Tier 1}}$, you will be required to specify which Tier 1 equation is used to calculate CO_2 emissions.

The following information is required for each fuel type combusted in the unit:

- Calculation methodology used for the emissions calculation period specified, for each fuel type [98.36(b)(5), 98.36(c)(1)(vii), 98.36(c)(3)(v)]:
 - Tier 1/Equation C-1 Annual fuel combusted, default heating value and default CO₂ emission factor
 - Tier 1/Equation C-1a Annual natural gas usage from billing records (therms) and default CO₂ emission factor

- Tier 1/Equation C-1b Annual natural gas usage from billing records (mmBtu) and default CO₂ emission factor
- Calculation methodology start date and end date for each fuel type [98.36(b)(6)-(7), 98.36(c)(1)(viii)-(ix), 98.36(c)(3)(viii)-(ix)]

Table 27
Tier 1 Fuel Details Data Element Definitions

Data Element Name	Description
Tier1FuelDetails	Parent Element (Conditionally Required): Collection of data elements containing details about Tier 1 fuel usage
TierName	The name of the Tier 1 methodology used to calculate emissions for the specified reporting configuration and specified fuel. For example, "Tier 1 (Equation C-1)". See list of allowable values: Tier 1 (Equation C-1) Tier 1 (Equation C-1a, natural gas billing in therms) Tier 1 (Equation C-1b, natural gas billing in mmBtu)
TierMethodologyStartDate	The methodology start date for the specified fuel type (YYYY-MM-DD).
TierMethodologyEndDate	The methodology end date for the specified fuel type (YYYY-MM-DD).
EmissionsDetailsNode	Parent Element: A collection of data elements containing inputs for equations related to Tier 1 fuel usage.
EquationC1C8Details	Parent Element: (Conditionally Required) A collection of data elements containing inputs for Equation C-1 and C-8.
EquationC1aC8aDetails	Parent Element: (Conditionally Required) A collection of data elements containing inputs for Equation C-1a and C-8a.
EquationC1bC8bDetails	Parent Element: (Conditionally Required) A collection of data elements containing inputs for Equation C-1b and C-8b.

XML Excerpt 23 Example for Tier 1 Fuel Details

Note: The code excerpt above is presented here to demonstrate the concept of reporting greenhouse gas emissions data.

Once the fuel type and CO_2 calculation method are specified, fuel specific emission information must be reported.

For each fuel type (including biomass fuel(s)) for which you have elected to use a <u>Tier 1 (Equation C-1, C-1a or C-1b)</u> methodology, Subpart C requires you to report the following information by fuel type:

- The total annual CO₂ mass emissions derived from Equation C-1, Equation C-1a or Equation C-1b, in metric tons CO₂ (this value will include both non-biogenic and biogenic CO₂ as applicable) [98.36(b)(8)(i), 98.36(c)(1)(vi), 98.36(c)(3)(vii)]
- The total annual CH₄ mass emissions derived from Equation C-8, Equation C-8a or Equation C-8b in metric tons CH₄ and in metric tons CO₂e (for Table C-2 fuels only) [98.36(b)(8)(i), 98.36(c)(1)(vi), 98.36(c)(3)(vii)]
- The total annual N₂O mass emissions derived from Equation C-8, Equation C-8a or Equation C-8b in metric tons N₂O and in metric tons CO₂e (for Table C-2 fuels only) [98.36(b)(8)(i), 98.36(c)(1)(vi), 98.36(c)(3)(vii)]

Table 28
Tier 1 Emissions Details Node Data Element Definitions

Data Element Name	Description
EmissionsDetailsNode	Parent Element: A collection of data elements containing inputs for equations related to Tier 1 fuel usage.
TotalCO2CombustionEmissions	The total annual CO ₂ mass emissions (including biogenic and non-biogenic CO ₂) for the specified fuel combusted in the reporting configuration, calculated using Equation C-1, C-1a or C-1b. Report the value in the child data element CalculatedValue . Set the units of measure to "Metric Tons" in the attribute massUOM .
TotalCH4CombustionEmissions	The total annual CH ₄ mass emissions for the specified fuel combusted in the reporting configuration, calculated using Equation C-8, C-8a or C-8b. Report the value in the child data element CalculatedValue . Set the units of measure to "Metric Tons" in the attribute massUOM .
TotalN2OCombustionEmissions	The annual N ₂ O mass emissions for the specified fuel combusted in the reporting configuration, calculated using Equation C-8, C-8a or C-8b. Report the value in the child data element CalculatedValue . Set the units of measure to "Metric Tons" in the attribute massUOM .
CH4EmissionsCO2Equivalent	The annual CH ₄ mass emissions for the specified fuel combusted in the reporting configuration, expressed in CO ₂ e. Multiply the calculated value for CH ₄ emissions by the Global Warming Potential of 25. Report the value in the child data element CalculatedValue . Set the units of measure to "Metric Tons" in the attribute massUOM .
N2OEmissionsCO2Equivalent	The annual N_2O mass emissions for the specified fuel combusted in the reporting configuration, expressed in CO_2e . Multiply the calculated value for N_2O emissions by the Global Warming Potential of 298. Report the value in the child data element CalculatedValue . Set the units of measure to "Metric Tons" in the attribute massUOM .

XML Excerpt 24 Example for Tier 1 Emissions Details Node

Once the fuel specific emission information are specified, equation-specific information must be reported.

Figure 38
Tier 1 Fuel Details Equation C1C8 Inputs Schema Diagram

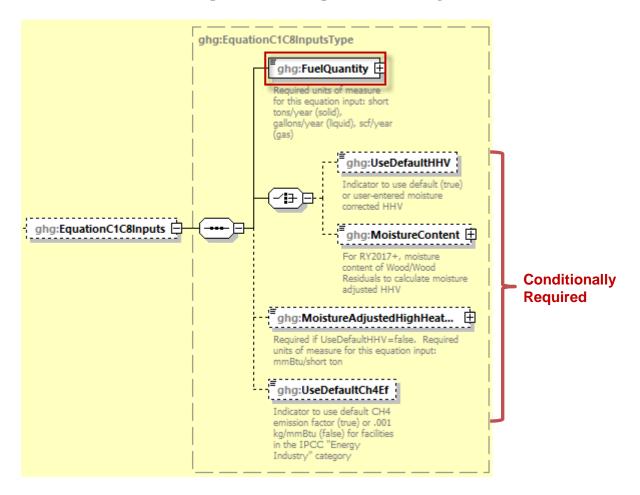


Figure 39
Tier 1 Fuel Details Equation C1aC8a Inputs Schema Diagram





Figure 40
Tier 1 Fuel Details Equation C1bC8b Inputs Schema Diagram



For each fuel type (including biomass fuel(s)) for which you have elected to use a <u>Tier 1 (Equation C-1, C-1a or C-1b)</u> methodology, Subpart C requires you to report the following information by fuel type: **Note:** Only inputs for one equation type may be entered.

- If using Equations C-1 and C-8:
 - o The fuel quantity (short tons/year if solid, gallons/year if liquid, scf/year if gas)
 - O If your fuels is Wood or Wood Residuals use UseDefaultHHV flag to indicate whether you will use the default HHV (true) or have chosen to report a Moisture Adjusted HHV (false).
 - o If you have chosen a UseDefaultHHV of false then report a MoistureContent as a percent.
 - o If you have chosen a UseDefaultHHV of false then report a calculated MoistureAdjustedHighHeatValue (mmBtu/short ton).
 - Whether the default CH₄ emission factor ("True") or .001 kg/mmBtu ("False") was used for facilities in the IPCC "Energy Industry" category that are using coal fuels.
- If using Equations C-1a and C-8a:
 - o Natural gas usage in therms/year.
- If using Equations C-1b and C-8b:
 - O Natural gas usage in mmBtu/year.

Table 29
Tier 1 Equation Inputs Data Element Definitions

Data Element Name	Description
EquationC1C8Inputs	Parent Element: (Conditionally Required) A collection of data elements to enter if using Equation C-1 and Equation C-8
FuelQuantity	Conditionally Required : If using Equation C-1 and Equation C-8, specify the fuel quantity. (UOM: short tons/year if solid, gallons/year if liquid, scf/year if gas)
UseDefaultHHV	Conditionally Required: If using Equation C-1 and Equation C-8, and the fuel is Wood and Wood Residuals use UseDefaultHHV flag to indicate whether you will use the default HHV (true) or have chosen to report a Moisture Adjusted HHV (false)
MoistureContent	Conditionally Required: If you have chosen a UseDefaultHHV of true then report a MoistureContent of Wood and Wood Residuals as a percent.
MoistureAdjustedHighHeatValue	Conditionally Required: If you have chosen a UseDefaultHHV of true then report a MoistureAdjustedHighHeatValue (mmBtu/short ton).

UseDefaultCh4Ef	Conditionally Required : If using Equation C-1 and Equation C-8, indicate "True" if using the default CH ₄ emission factor or "False" if .001 kg/mmBtu was used for facilities in the IPCC "Energy Industry" category that are using coal fuels.
EquationC1aC8aInputs	Parent Element: (Conditionally Required) A collection of data elements to enter if using Equation C-1a and Equation C-8a
NaturalGasUsage	Conditionally Required : If using Equation C-1a and Equation C-8a, specify the natural gas usage in therms/year.
EquationC1bC8bInputs	Parent Element: (Conditionally Required) A collection of data elements to enter if using Equation C-1b and Equation C-8b
NaturalGasUsage	Conditionally Required : If using Equation C-1b and Equation C-8b, specify the natural gas usage in mmBtu/year.

XML Excerpt 25 Example for Equation C1C8 Inputs

XML Excerpt 26 Example for Equation C1aC8a Inputs


XML Excerpt 27 Example for Equation C1bC8b Inputs



See <u>Section 6.0</u> for instructions on how to report facility level roll-up emissions or see <u>Section 2.0</u> for instructions on how to report for a different configuration.

4.2 Tier 2 Fuel Details

Figure 41 Tier 2 Fuel Details Schema Diagram

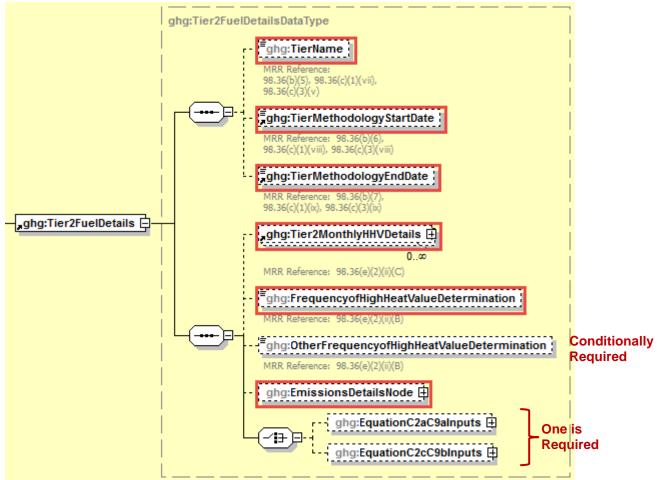

Note: Data elements boxed in red are required. Please see page 4 of this document for more information on conditionally required elements.

For each fuel type (including biomass fuel(s)) in a configuration that uses $\underline{\text{Tier 2}}$, you will be required to specify which Tier 2 equation is used to calculate CO_2 emissions.

The following information is required for each fuel type combusted in the unit:

- Calculation methodology used for the emissions calculation period specified, for each fuel type [98.36(b)(5), 98.36(c)(1)(vii), 98.36(c)(3)(v)]:
 - \circ Tier 2/Equation C-2a Annual fuel combusted, <u>measured heating value</u> and default CO₂ emission factor
 - Tier 2/Equation C-2c Steam generation, ratio of maximum rated heat input capacity to design rated steam output capacity and default CO₂ emission factor (for MSW and solid fuels listed in Table C-1))
- Calculation methodology start date and end date for each fuel type [98.36(b)(6)-(7), 98.36(c)(1)(viii)-(ix), 98.36(c)(3)(viii)-(ix)]


Table 30
Tier 2 Fuel Details Data Element Definitions

Data Element Name	Description
Tier2FuelDetails	Parent Element (Conditionally Required): Collection of data elements containing details about tier 2 fuel usage.
TierName	The name of the Tier 2 methodology used to calculate emissions for the specified reporting configuration. See list of allowable values: Tier 2 (Equation C-2a) Tier 2 (Equation C-2c, steam generation)
TierMethodologyStartDate	The methodology start date for the specified fuel type (YYYY-MM-DD).
TierMethodologyEndDate	The methodology end date for the specified fuel type (YYYY-MM-DD).

XML Excerpt 28 Example for Tier 2 Fuel Details

Note: The code excerpt above is presented here to demonstrate the concept of reporting greenhouse gas emissions data.

Figure 42
Tier 2 Monthly HHV Details Schema Diagram

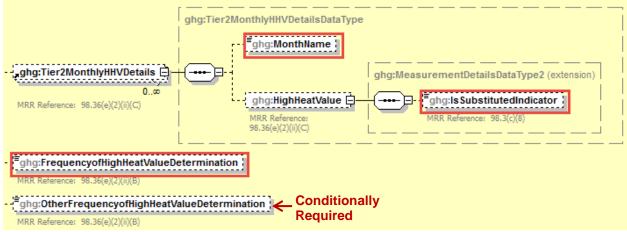

Note: Data elements boxed in red are required. Please see page 4 of this document for more information on conditionally required elements.

For each fuel type (including biomass fuel(s)) for which you have elected to use the <u>Tier 2/Equation</u> <u>C-2a</u> methodology, Subpart C requires you to report the following information by fuel type:

• Identification of each month for which HHVs were calculated using one or more substitute data values [98.36(e)(2)(ii)(C)]

- The frequency of the HHV determinations [98.36(e)(2)(ii)(B)]
 - o Hourly
 - o Daily
 - o Weekly
 - o Monthly
 - o Semiannually
 - o Quarterly
 - Once per fuel lot
 - Upon addition of oil to the storage tank
 - Other (specify)

Table 31
Tier 2 Monthly HHV Details Data Element Definitions

Data Element Name	Description
Tier2MonthlyHHVDetails	Parent Element
MonthName	Specify the name of each month. See list of allowable values: January February March April May June July August September October November December
HighHeatValue	Parent Element: For the child data element IsSubstitutedIndicator, indicate (Y/N) whether the HHV value for the specified month was calculated from one or more substitute data values.
FrequencyofHighHeatValueDetermination	The frequency of the HHV determinations. See list of allowable values below. If the frequency you are reporting does not appear in the list, then report "Other (specify)" and then specify the frequency in the OtherFrequencyofHighHeatValueDetermination data element. Hourly Daily Weekly Monthly Semiannually Quarterly Once per fuel lot Upon addition of oil to the storage tank Other (specify)
OtherFrequencyofHighHeatValueDetermination	Conditionally Required: The frequency of the HHV determinations if "Other (specify)" is reported. Otherwise do not report this data element.

XML Excerpt 29 Example for Tier 2 Monthly HHV Details

Figure 43
Tier 2 Emissions Details Node Schema Diagram

Note: Data elements boxed in red are required.

For each fuel type (including biomass fuel(s)) for which you have elected to use the <u>Tier 2/Equation</u> <u>C-2a</u> methodology, Subpart C requires you to report the following information by fuel type:

- The total annual CO₂ mass emissions derived from Equation C-2a, in metric tons CO₂ (this value will include both non-biogenic and biogenic CO₂ as applicable) [98.36(b)(8)(i), 98.36(c)(1)(vi), 98.36(c)(3)(vii)]
- The total annual CH₄ mass emissions derived from Equation C-9a, in metric tons CH₄ and in metric tons CO₂e (for Table C-2 fuels only) [98.36(b)(8)(i), 98.36(c)(1)(vi), 98.36(c)(3)(vii)]
- The total annual N₂O mass emissions derived from Equation C-9a, in metric tons N₂O and in metric tons CO₂e (for Table C-2 fuels only) [98.36(b)(8)(i), 98.36(c)(1)(vi), 98.36(c)(3)(vii)]

For each fuel type (including biomass fuel(s)) for which you have elected to use the <u>Tier 2/Equation</u> <u>C-2c</u> methodology, Subpart C requires you to report the following information by fuel type:

- The total annual CO₂ mass emissions derived from Equation C-2c, in metric tons CO₂ (this value will include both non-biogenic and biogenic CO₂ as applicable) [98.36(b)(8)(i), 98.36(c)(1)(vi), 98.36(c)(3)(vii)]
- The total annual CH₄ mass emissions derived from Equation C-9b, in metric tons CH₄ and in metric tons CO₂e (for Table C-2 fuels only) [98.36(b)(8)(i), 98.36(c)(1)(vi), 98.36(c)(3)(vii)]
- The total annual N₂O mass emissions derived from Equation C-9b, in metric tons N₂O and in metric tons CO₂e (for Table C-2 fuels only) [98.36(b)(8)(i), 98.36(c)(1)(vi), 98.36(c)(3)(vii)]

Table 32
Tier 2 Monthly HHV Details Emissions Details Node Data Element Definitions

Data Element Name	Description
EmissionsDetailsNode	Parent Element: A collection of data elements containing the annual CO ₂ , CH ₄ and N ₂ O mass emissions from combustion of the specific fuel type in the unit configuration. Express in metric tons of the specific gas and in metric tons of CO ₂ e.
TotalCO2CombustionEmissions	The total annual CO ₂ mass emissions (including biogenic and non-biogenic CO ₂) for the specified fuel combusted in the reporting configuration, calculated using Equation C-2a or C-2c Report the value in the child data element CalculatedValue . Set the units of measure to "Metric Tons" in the attribute massUOM .
TotalCH4CombustionEmissions	The total annual CH ₄ mass emissions for the specified fuel combusted in the reporting configuration, calculated using Equation C-9a or C-9b. Report the value in the child data element CalculatedValue . Set the units of measure to "Metric Tons" in the attribute massUOM .
TotalN2OCombustionEmissions	The total annual N ₂ O mass emissions for the specified fuel combusted in the reporting configuration, calculated using Equation C-9a or C-9b expressed in mass of N ₂ O. Report the value in the child data element CalculatedValue . Set the units of measure to "Metric Tons" in the attribute massUOM .
CH4EmissionsCO2Equivalent	The annual CH ₄ mass emissions for the specified fuel combusted in the reporting configuration, expressed in CO ₂ e. Multiply the calculated value for CH ₄ emissions by the Global Warming Potential of 25. Report the value in the child data element CalculatedValue . Set the units of measure to "Metric Tons" in the attribute massUOM .
N2OEmissionsCO2Equivalent	The annual N_2O mass emissions for the specified fuel combusted in the reporting configuration, expressed in CO_2e . Multiply the calculated value for N_2O emissions by the Global Warming Potential of 298. Report the value in the child data element CalculatedValue . Set the units of measure to "Metric Tons" in the attribute massUOM .

XML Excerpt 30 Example for Tier 2 Monthly HHV Details Emissions Details Node

```
<ghg:EmissionsDetailsNode>
        <ghg:TotalCO2CombustionEmissions massUOM="Metric Tons">
                <ghg:CalculatedValue>2200.4
        </ghg:TotalCO2CombustionEmissions>
        <ghg:TotalCH4CombustionEmissions massUOM="Metric Tons">
                <ghg:CalculatedValue>220.73</phq:CalculatedValue>
        </ghg:TotalCH4CombustionEmissions>
        <ghg:TotalN2OCombustionEmissions massUOM="Metric Tons">
                <ghg:CalculatedValue>22.576</ghg:CalculatedValue>
        </ghg:TotalN2OCombustionEmissions>
        <ghg:CH4EmissionsCO2Equivalent massUOM="Metric Tons">
                <ghg:CalculatedValue>4620.8
        </ghg:CH4EmissionsCO2Equivalent>
        <ghg:N2OEmissionsCO2Equivalent massUOM="Metric Tons">
                <ghg:CalculatedValue>6820.1
        </ghg:N2OEmissionsCO2Equivalent>
</ghg:EmissionsDetailsNode>
```

ghg:EquationC2aC9aInputsType ghg:FuelQuantity 拱 for this equation input: short ghg:UseUserHHV ghg:HighHeatValue Required if ghg:EquationC2aC9aInputs UseUserHHV=true. Required units of measure for this equation input: One is **~!}}** mmBtu/short ton (solid), mmBtu/gallon (liquid), mmBtu/scf (gas) Required ghg:EquationC2bInputs If UseDefaultHHV=false, populate monthly HHV to calculate annual HHV ghg:UseDefaultCh4Ef emission factor (true) or .001 kg/mmBtu (false) for facilities in the IPCC "Energy Industry" category ghg:EquationC2bInputsType ghg:Month *IF Conditionally ghg:FuelCombusted Required tons/year (solid), gallons/year (liquid), scf/year (gas) Not ghg:EquationC2bMonthlyIn... **Applicable +**13 🖆ghg:EquationC2bInputs 🖨 Conditionally Required ghg:HighHeatValue 🗎 ghg:Values Not **Applicable** ghg:MolecularWeight 🕀 Conditionally ghg:MonthApplicable Required **⊞** constraints

Figure 44
EquationC2aC9a Inputs Schema Diagram

Table 33
Tier 2 Equation C2aC9a Data Element Definitions

Data Element Name	Description
EquationC2aC9aInputs	Parent Element: (Conditionally Required) If using Equations C-2a and C-9a, a collection of data elements to enter for Tier 2
FuelQuantity	Specify the fuel quantity in short tons/year for a solid, gallons/year for a liquid, or scf/year for a gas.
UseUserHHV	Indicate "True" if using user-entered HHV or "False" if high heat value will be calculated.
HighHeatValue	Conditionally Required: If UseUserHHV = "True", specify the high heat value in mmBtu/short ton for a solid, mmBtu/gallon for a liquid, or mmBtu/scf for a gas.
UseDefaultCh4Ef	Required: If the facility is in the IPCC "Energy Industry" category and is using coal fuels, indicate "True" if using the default CH ₄ emission factor or "False" if using .001 kg/mmBtu.
EquationC2bInputs	Parent Element: The collection of data elements used to determine the weighted annual average high heat value of the fuel. Conditionally Required: These data elements are used if UseUserHHV = False. These data elements are required if the results of fuel sampling are received monthly or more frequently and the maximum rated heat input capacity of the unit is greater than or equal to 100 mmBtu/hour (or for a group of units containing at least one unit of that size). The user has the option to use Equation C-2b to quantify HHV regardless of sampling frequency for units with a maximum rated capacity less than 100 mmBtu/hour (or a group of such units).
EquationC2bMonthlyInputs	Parent Element: The collection of monthly data elements used to determine the annual average high heat value of the fuel. Required elements below are only required if UseUserHHV is false.
Month	Required: Specify the month for which values are being provided (e.g., "January", "February", etc)
Values	Parent Element: A collection of data elements describing fuel combusted and HHV for each month specified.
FuelCombusted	Specify the fuel combusted during the month in units short tons/year if solid, gallons/year if liquid and scf/year if gas.
	Conditionally Required: If MonthApplicable is True
CarbonContent	Not Applicable: Carbon Content is not used Equation C2aC9a
HighHeatValue	Specify the measured high heat value of the fuel for the month, which may be the arithmetic average of multiple determinations, or, if applicable, an appropriate substitute data value. (mmBtu/short ton if solild, mmBtu/gallon if liquid, mmBtu/scf if gas).

Data Element Name	Description
	Conditionally Required: If MonthApplicable is True
MolecularWeight	Not Applicable: MolecularWeight is not used Equation C2aC9a
MonthApplicable	Conditionally Required: True or False. Specify False when a month is not applicable. If this data element is omitted the node is treated as if MonthApplicable is True.

Figure 45
Equation C2cC9b Inputs Schema Diagram

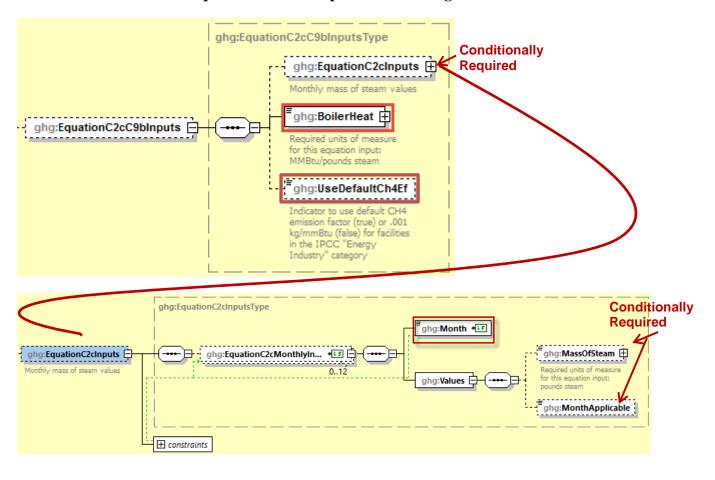


Table 34
Tier 2 Equation C2cC9b Data Element Definitions

Data Element Name	Description
EquationC2cC9bInputs	Parent Element: (Conditionally Required) If using Equations C-2c and C-9b, a collection of data elements to enter for Tier 2
EquationC2cInputs	Parent Element: (Conditionally Required) If using Equation C-2c, a collection of monthly data elements to calculate mass of steam values.
EquationC2cMonthlyInputs	Parent Element: A collection of monthly data elements to calculate mass of steam values.
BoilerHeat	Specify the ratio of the boiler's maximum rated heat input capacity to its design rated steam output capacity (mmBtu/lb steam).
UseDefaultCh4Ef	Required: If the facility is in the IPCC "Energy Industry" category and is using coal fuels, indicate "True" if using the default CH ₄ emission factor or "False" if using .001 kg/mmBtu.
Month	Required: Specify the month for which values are being provided (e.g., "January", "February", etc)
Values	Parent Element: A collection of data elements for each month specified.
MassOfSteam	Specify the mass of steam for the month indicated in pounds steam.
	Conditionally Required: If MonthApplicable is True
MonthApplicable	Conditionally Required: True or False. Specify False when a month is not applicable. If this data element is omitted the node is treated as if MonthApplicable is True.

See <u>Section 6.0</u> for instructions on how to report facility level roll-up emissions or see <u>Section 2.0</u> for instructions on how to report for a different configuration.

4.3 Tier 3 Fuel Details

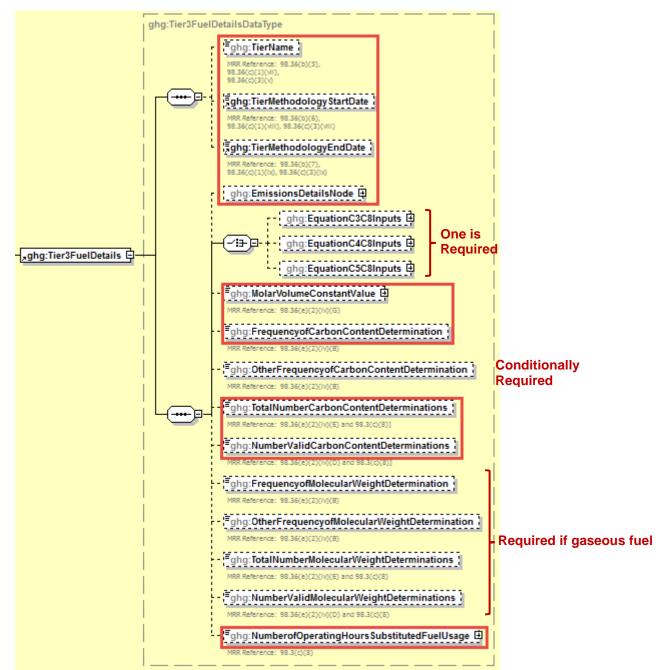


Figure 46
Tier 3 Fuel Details Schema Diagram

Note: Data elements boxed in red are required. Please see page 4 of this document for more information on conditionally required elements.

For each fuel type (including biomass fuel(s)) in a configuration that uses $\underline{\text{Tier 3}}$, you will be required to specify which Tier 3 equation is used to calculate CO_2 emissions.

The following information is required for each fuel type combusted in the unit:

- Calculation methodology used for the emissions calculation period specified, for each fuel type [98.36(b)(5), 98.36(c)(1)(vii), 98.36(c)(3)(v)]:
 - \circ $\,$ Tier 3/Equation C-3 Annual mass of \underline{solid} fuel combusted and average carbon content of the \underline{solid} fuel
 - Tier 3/Equation C-4 Annual mass of <u>liquid</u> fuel combusted and average carbon content of the <u>liquid</u> fuel
 - Tier 3/Equation C-5 Annual volume of <u>gaseous</u> fuel combusted, average carbon content of the <u>gaseous</u> fuel and average molecular weight of the <u>gaseous</u> fuel
- Calculation methodology start date and end date, for each fuel type [98.36(b)(6)-(7), 98.36(c)(1)(viii)-(ix), 98.36(c)(3)(viii)-(ix)]

Table 35
Tier 3 Fuel Details Data Element Definitions

Data Element Name	Description
Tier3FuelDetails	Parent Element (Conditionally Required): Collection of data elements containing details about tier 3 fuel usage.
TierName	The name of the Tier 3 methodology used to calculate emissions for the specified unit or unit configuration. See list of allowable values: Tier 3 (Equation C-3, solid fuel) Tier 3 (Equation C-4, liquid fuel) Tier 3 (Equation C-5, gaseous fuel)
TierMethodologyStartDate	The methodology start date for the specified fuel type (YYYY-MM-DD).
TierMethodologyEndDate	The methodology end date for the specified fuel type (YYYY-MM-DD).

XML Excerpt 31 Example for Tier 3 Fuel Details

Figure 47
Tier 3 Emissions Details Node Schema Diagram

Note: Data elements boxed in red are required.

For each fuel type (including biomass fuel(s)) for which you have elected to use a <u>Tier 3 (Equation C-3, C-4 or C-5)</u> methodology, Subpart C requires you to report the following information by fuel type:

- The total annual CO₂ mass emissions derived from Equation C-3 for solid fuels, Equation C-4 for liquid fuels or Equation C-5 for gaseous fuels, in metric tons CO₂ (this value will include both non-biogenic and biogenic CO₂ as applicable) [98.36(b)(8)(i), 98.36(c)(1)(vi), 98.36(c)(3)(vii)]
- The total annual CH₄ mass emissions derived from Equation C-8, in metric tons CH₄ and in metric tons CO₂e (for Table C-2 fuels only) [98.36(b)(8)(i), 98.36(c)(1)(vi), 98.36(c)(3)(vii)]
- The total annual N₂O mass emissions derived from Equation C-8, in metric tons N₂O and in metric tons CO₂e (for Table C-2 fuels only) [98.36(b)(8)(i), 98.36(c)(1)(vi), 98.36(c)(3)(vii)]

Table 36
Tier 3 Fuel Details Emissions Details Node Data Element Definitions

Data Element Name	Description
EmissionsDetailsNode	Parent Element: A collection of data elements containing inputs for equations related to Tier 3 fuel usage.
TotalCO2CombustionEmissions	Parent Element: The total annual CO ₂ mass emissions (including biogenic and non-biogenic CO ₂) for the specified fuel combusted in the reporting configuration, calculated using Equation C-3, C-4 or C-5. Report the value in the child data element CalculatedValue . Set the units of measure to "Metric Tons" in the attribute massUOM .
TotalCH4CombustionEmissions	Parent Element: The total annual CH ₄ mass emissions for the specified fuel combusted in the reporting configuration, calculated using Equation C-8. Report the value in the child data element CalculatedValue . Set the units of measure to "Metric Tons" in the attribute massUOM .
TotalN2OCombustionEmissions	Parent Element: The total annual N ₂ O mass emissions for the specified fuel combusted in the reporting configuration, calculated using Equation C-8. Report the value in the child data element CalculatedValue. Set the units of measure to "Metric Tons" in the attribute massUOM.
CH4EmissionsCO2Equivalent	Parent Element: The annual CH ₄ mass emissions for the specified fuel combusted in the reporting configuration, expressed in CO ₂ e. Multiply the calculated value for CH ₄ emissions by the Global Warming Potential of 25. Report the value in the child data element CalculatedValue . Set the units of measure to "Metric Tons" in the attribute massUOM .
N2OEmissionsCO2Equivalent	Parent Element: The annual N ₂ O mass emissions for the specified fuel combusted in the reporting configuration, expressed in CO ₂ e. Multiply the calculated value for N ₂ O emissions by the Global Warming Potential of 298 for reporting year. Report the value in the child data element CalculatedValue . Set the units of measure to "Metric Tons" in the attribute massUOM .

Figure 48
Tier 3 Equation Inputs Schema Diagram




Figure 49 Tier 3 Equation C3C8 Inputs Schema Diagram ghg:EquationC3C8InputsType ghg:FuelQuantity 🖽 ghg:UseUserCarbonContent ghg:CarbonContent ⊞ Conditionally Required ghg:EquationC3C8Inputs ghg:UseDefaultHHV Conditionally ghg:HighHeatValue ⊞ Required quired units of measure hg:UseDefaultCh4Ef Conditionally Required ghg:EquationC2bInputs 拱 ghg:EquationC2bInputsType ghg:Month *IF Conditionally Required ghg:EquationC2bMonthlyln... 4[3] [ghg:CarbonContent 🕀 ghg:EquationC2bInputs 🖨 Not **Applicable** ghg:HighHeatValue ghg:Values 🖨 ghg:MolecularWeight 🖽 Conditionally ghg:MonthApplicable Required **⊞** constraints

Table 37
Tier 3 Equation C3C8 Data Element Definitions

Data Element Name	Description
EquationC3C8Inputs	Parent Element: (Conditionally Required) If using Equations C-3 (for a solid fuel) and C-8, a collection of data elements to enter for Tier 3
FuelQuantity	Specify the fuel quantity in short tons/year
UseUserCarbonContent	Indicate "True" if using arithmetic average carbon content or "False" if carbon content will be calculated using Equation C-2b.
CarbonContent	Conditionally Required: If UseUserCarbonContent = "True", specify the carbon content in percent by weight, expressed as a decimal fraction for the solid fuel. Required if UseUserCarbonContent is user-entered "True".
UseDefaultHHV	Indicate "True" if default high heat value is used or "False" if average user-entered high heat value is used.
HighHeatValue	Conditionally Required: If UseDefaultHHV is "False", specify the high heat value in mmBtu/ton. Required if UseDefaultHHV is "False".
UseDefaultCh4Ef	Required: If the facility is in the IPCC "Energy Industry" category and is using coal fuels, indicate "True" if using the default CH ₄ emission factor or "False" if using .001 kg/mmBtu.
EquationC2bInputs	Parent Element: The collection of data elements used to determine the weighted annual average carbon content of the fuel. Conditionally Required: These data elements are used if UseUserCarbonContent= False.
EquationC2bMonthlyInputs	Parent Element: A collection of monthly data elements to calculate weighted annual average carbon content.
Month	Required: Specify the month for which values are being provided (e.g., "January", "February", etc)
Values	Parent Element: A collection of data elements describing fuel combusted and carbon content for each month specified.
FuelCombusted	Specify the mass of the fuel combusted during the month from company records (using short tons for solid fuel)
CarbonContent	Conditionally Required: If MonthApplicable is True Specify the carbon content of the fuel for the month in percent by weight, expressed as a decimal fraction (solid). Conditionally Required: If MonthApplicable is True
HighHeatValue	Not Applicable: HighHeatValue cannot be reported by month in Eq-C3C8. Please use the default HHV or report annual weighted average HighHeatValue as a single value in Eq-C3C8 node.

Data Element Name	Description
MolecularWeight	Not Applicable: MolecularWeight is not used Equation C3C8
MonthApplicable	Conditionally Required: True or False. Specify False when a month is not applicable. If this data element is omitted the node is treated as if MonthApplicable is True.

Figure 50 Tier 3 Equation C4C8 Inputs Schema Diagram

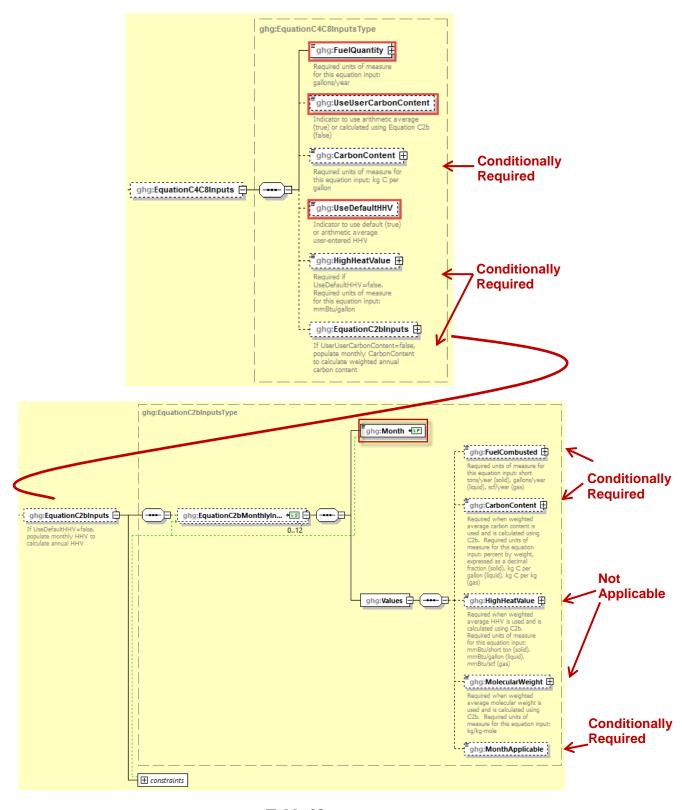


Table 38
Tier 3 Equation C4C8 Data Element Definitions

Data Element Name	Description
EquationC4C8Inputs	Parent Element: (Conditionally Required) If using Equations C-4 (for a liquid fuel) and C-8, a collection of data elements to enter for Tier 3
FuelQuantity	Specify the fuel quantity in gallons/year
UseUserCarbonContent	Indicate "True" if using user-entered carbon content or "False" if using Equation C-2b to calculate weighted average carbon content.
CarbonContent	Conditionally Required: If UseUserCarbonContent = "True", specify the carbon content in percent by weight, expressed as a decimal fraction for the solid fuel.
UseDefaultHHV	Indicate "True" if default high heat value is used or "False" if average user-entered high heat value is used.
HighHeatValue	Specify the high heat value in mmBtu/gallon. Conditionally Required: Used if "UseDefaultHHV" is "False". Specify the high heat value in mmBtu/ton. Required if UseDefaultHHV is "False".
EquationC2bInputs	Parent Element: The collection of data elements used to determine the weighted annual average carbon content of the fuel. Conditionally Required: These data elements are used if UseDefaultCarbonContent = False.
EquationC2bMonthlyInputs	Parent Element: The collection of monthly data elements used to determine the annual average carbon content of the liquid fuel.
Month	Required: Specify the month for which values are being provided (e.g., "January", "February", etc)
Values	Parent Element: A collection of data elements describing fuel combusted and carbon content for each month specified.
FuelCombusted	Specify the volume of the fuel combusted during the month from company records (using gallons for liquid fuel.)
CarbonContent	Conditionally Required: If MonthApplicable is True Conditionally Required: If UseUserCarbonContent = "True", specify the carbon content in fractionby weight, expressed as a decimal fraction for the solid fuel. Required if UseUserCarbonContent is user-entered "True".
HighHeatValue	Not Applicable: HighHeatValue cannot reported by month in Eq C4C8. Please use the default HHV or report annual weighted average HighHeatValue as a single value in Eq-C4C8 node.
MolecularWeight	Not Applicable: MolecularWeight is not used Equation C4C8.

Data Element Name	Description
MonthApplicable	Conditionally Required: True or False. Specify False when a month is not applicable. If this data element is omitted the node is treated as if MonthApplicable is True.

Figure 51 Tier 3 Equation C5C8 Inputs Schema Diagram ghg:EquationC5C8InputsType ghg:FuelQuantity ghg:UseUserCarbonContent ghg:CarbonContent ⊞ Conditionally Required ghg:UseUserMolecularWeight ghg:EquationC5C8Inputs Conditionally ghg:MolecularWeight 🕀 Required ghg:UseDefaultHHV Conditionally ghg:HighHeatValue ⊞ Required ghg:EquationC2bInputs If UseUserCarbonContent=false or UseUserMolecularWeight=false, ghg:EquationC2bInputsType nwonth + €F ghg:FuelCombusted Conditionall Required ghg:CarbonContent 🖽 ghg:EquationC2bMonthlyIn... gng:EquationC2bInputs ghg:HighHeatValue 🖽 ghg:Values Not **Applicable** Required when weighted average molecular weight is used and is calculated using Conditionally Required ghg:MonthApplicable

Environmental Protection Agency

Table 39
Tier 3 Equation C5C8 Data Element Definitions

Data Element Name	Description
EquationC5C8Inputs	Parent Element: (Conditionally Required) For a gaseous fuel, if using Equations C-5 and C-8, a collection of data elements to enter for Tier 3
FuelQuantity	Specify the total volume of fuel consumed, in standard cubic feet per year.
UseUserCarbonContent	Indicate "True" if using arithmetic average carbon content or "False" if carbon content will be calculated using Equation C-2b
CarbonContent	Specify the carbon content of the gaseous fuel in kg C per kg of gaseous fuel Conditionally Required: Used if "UseUserCarbonContent" is "True."
UseUserMolecularWeight	Indicate "True" if using user-entered molecular weight or "False" if using Equation C-2b to calculate weighted annual average molecular weight.
MolecularWeight	Specify the molecular weight for the fuel consumed, in kg/kg-mole. Conditionally Required: Used if "UseUserMolecularWeight" is "True."
UseDefaultHHV	Indicate "True" if default high heat value is used or "False" if average user-entered high heat value is used
HighHeatValue	Specify the high heat value in mmBtu/scf. Conditionally Required: Used if "UseDefaultHHV" is "False."
EquationC2bInputs	Parent Element: The collection of data elements used to determine the weighted annual average carbon content and/or molecular weight of the gaseous fuel. Conditionally Required: These data elements are used if UseDefaultCarbonContent = False, UseUserMolecularWeight = False.
EquationC2bMonthlyInputs	Parent Element: A collection of monthly data elements to calculate weighted annual carbon content and/or molecular weight.
Month	Required: Specify the month for which values are being provided (e.g., "January", "February", etc)
Values	Parent Element: A collection of data elements describing fuel combusted, and carbon content and/or molecular weight for each month specified.
FuelCombusted	Specify the volume of the fuel combusted during the month from company records (using standard cubic feet) Conditionally Possitionals of Month Applicable is True
	and carbon content and/or molecular weight for each month specified. Specify the volume of the fuel combusted during the month from compa

Data Element Name	Description	
CarbonContent	Conditionally Required: If using weighted average carbon content calculated using Equation C-2b, specify the carbon content for each month. Units of measure are kg C per kg for the gaseous fuel.	
HighHeatValue	Not Applicable: HighHeatValue cannot be reported by month in Eq- C5C8. Please use the default HHV or report annual weighted average HighHeatValue as a single value in Eq-C5C8 node.	
MolecularWeight	Specify the molecular weight for the month in kg/kg-mole. Conditionally Required: If MonthApplicable is True and UseUserMolecularWeight is False	
MonthApplicable	Conditionally Required: True or False. Specify False when a month is not applicable. If this data element is omitted the node is treated as if MonthApplicable is True.	

ghg:MolarVolumeConstantValue 🛨 ghg:FrequencyofCarbonContentDetermination ghg:OtherFrequencyofCarbonContentDetermination Conditionally Required MRR Reference: 98.36(e)(2)(iv)(B) ghg:TotalNumberCarbonContentDeterminations ghg:NumberValidCarbonContentDeterminations MRR Reference: 98.36(e)(2)(iv)(D) and 98.3(c)(8)] ghg:FrequencyofMolecularWeightDetermination Required if gaseous fuel -----MRR Reference: 98.36(e)(2)(iv)(B) **Conditionally Required** ghg:OtherFrequencyofMolecularWeightDetermination if gaseous fuel MRR Reference: 98.36(e)(2)(iv)(B) ghg:TotalNumberMolecularWeightDeterminations Required if gaseous fuel MRR Reference: 98.36(e)(2)(iv)(E) and 98.3(c)(8) ghg:NumberValidMolecularWeightDeterminations Required if gaseous fuel -----MRR Reference: 98.36(e)(2)(iv)(D) and 98.3(c)(8) ghg:NumberofOperatingHoursSubstitutedFuelUsage

Figure 52 Additional Tier 3 Fuel Details Schema Diagram

Note: Data elements boxed in red are required. Please see page 4 of this document for more information on conditionally required elements.

For each fuel type (including biomass fuel(s)) for which you have elected to use a <u>Tier 3 (Equation C-3, C-4 or C-5)</u> methodology, Subpart C requires you to report the following information by fuel type:

- The value of the molar volume constant used in Equation C-5.
- The frequency of carbon content determinations [98.36(e)(2)(iv)(B)]
 - Hourly
 - Daily
 - o Weekly
 - Monthly
 - o Semiannually
 - o Quarterly
 - Once per fuel lot
 - Upon addition of oil to the storage tank

- o Other (specify)
- The total number of carbon content substitute data values [98.36(e)(2)(iv)(E)]
- The total number of valid carbon content determinations [98.36(e)(2)(iv)(D)]
- The total number of operating hours in the reporting year for which missing data substitution was used for fuel usage [98.3(c)(8)]

Conditionally Required: For each gaseous fuel at each configuration for which you have elected to use the <u>Tier 3/Equation C-5 methodology</u>, Subpart C also requires you to report the following additional information:

- Frequency of molecular weight determinations [98.36(e)(2)(iv)(B)]
 - Hourly
 - o Daily
 - Weekly
 - o Monthly
 - o Semiannually
 - Quarterly
 - Other (specify)
- Frequency of molecular weight determinations [98.36(e)(2)(iv)(B)]
- Total number of molecular weight substitute data values [98.36(e)(2)(iv)(E)] Total number of molecular weight substitute data values [98.36(e)(2)(iv)(E)]
- Total number of valid molecular weight determinations [98.36(e)(2)(iv)(D)]
- The value of the molar volume constant (MVC) at standard conditions [98.36(e)(2)(iv)(G)]

Table 40
Tier 3 Fuel Details Data Element Definitions

MolarVolumeConstantValue	Conditionally Required: If Equation C-5 is used, specify the value of the molar volume constant.
FrequencyofCarbonContentDetermination	The frequency of carbon content determinations for the specified fuel for the reporting year. See the list of allowable values below. If the frequency you are reporting does not appear in the list, then report "Other (specify)" and then specify the frequency in the "OtherFrequencyofCarbonContentDetermination" data element. Hourly Daily Weekly Monthly Semiannually Quarterly Once per fuel lot Upon addition of oil to the storage tank Other (specify)
OtherFrequencyofCarbonContentDetermina tion	Conditionally Required: The frequency of the carbon content determinations if "Other (specify)" is reported. Otherwise, do not report this element.
TotalNumberCarbonContentDeterminations	The total number of substitute data values used for carbon content in the annual GHG emissions calculations.
NumberValidCarbonContentDeterminations	The total number of valid carbon content determinations made during the reporting year for the specified fuel type.
FrequencyofMolecularWeightDetermination	Conditionally Required: For gaseous fuels only, the frequency of molecular weight determinations for the specified fuel during the reporting year. See list of allowable values below. If the frequency you are reporting does not appear in the list, then report "Other (specify)" and then specify the frequency in the "OtherFrequencyofMolecularWeightDetermination" data element. Hourly Daily Weekly Monthly Semiannually Quarterly Once per fuel lot Upon addition of oil to the storage tank Other (specify)
OtherFrequencyofMolecularWeightDetermination	Conditionally Required: For gaseous fuels only, the frequency of the molecular weight determinations if "Other (specify)" is reported.
TotalNumberMolecularWeightDeterminatio ns	Conditionally Required: For gaseous fuels only, the number of substitute data values used for molecular weight used in the annual GHG emissions calculations.

NumberValidMolecularWeightDeterminations	Conditionally Required: For gaseous fuels only, the total number of valid molecular weight determinations made during the reporting year for the specified fuel type.
MolarVolumeConstantValue	Conditionally Required: For gaseous fuels only, the value of the molar volume constant value (MVC) at standard conditions used in Equation C-5. The selection is limited to 836.6 or 849.5 Set the units of measure to scf/kg-mole in the attribute massUOM .
NumberofOperatingHoursSubstitutedFuelU sage	For all fuels, the total number of operating hours in the year for which missing data substitution was used for fuel usage. Set the units of measure to "Hours" in the attribute timeUOM .

XML Excerpt 32 Example for Tier 3 Fuel Details Emissions Details Node

```
<ghg:MolarVolumeConstantValue>836.6</ph>
<ghg:MolarVolumeConstantValue>
<ghg:FrequencyofCarbonContentDetermination>Weekly</phg:FrequencyofCarbonContentDetermination>
<ghg:TotalNumberCarbonContentDeterminations>4</phg:TotalNumberCarbonContentDeterminations>
<ghg:NumberValidCarbonContentDeterminations>48</phpg:NumberValidCarbonContentDeterminations>
<ghg:FrequencyofMolecularWeightDetermination>Weekly
/ghg:FrequencyofMolecularWeightDetermination>

<ghg:TotalNumberMolecularWeightDeterminations>22</phpg:TotalNumberMolecularWeightDeterminations>
<ghg:NumberValidMolecularWeightDeterminations>30</phpg:NumberValidMolecularWeightDeterminations>
<ghg:NumberofOperatingHoursSubstitutedFuelUsage
timeUOM="Hours">50</phpg:NumberofOperatingHoursSubstitutedFuelUsage>
</phpg:Tier3FuelDetails>

</php:TierFuelDetails>
```


Note: The code excerpt above is presented here to demonstrate the concept of reporting greenhouse gas emissions data.



See <u>Section 6.0</u> for instructions on how to report facility level roll-up emissions or see <u>Section 2.0</u> for instructions on how to report for a different configuration.

4.4 Tier 4 Fuel Details

Figure 53
Tier 4 Fuel Details Schema Diagram

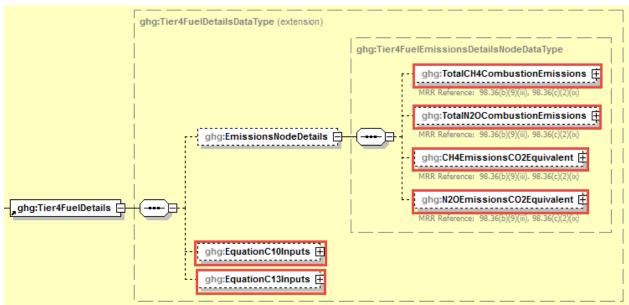

Note: Data elements boxed in red are required.

When a <u>Tier 4 (CEMS)</u> configuration is used, you are required to report the following information for each fuel type listed in Table C-2 (including biomass fuel(s)):

- The total annual CH₄ mass emissions derived from Equation C-10, in metric tons CH₄ and in metric tons CO₂e [98.36(b)(9)(iii), 98.36(c)(2)(ix)]
- The total annual N₂O mass emissions derived from Equation C-10, in metric tons N₂O and in metric tons CO₂e [98.36(b)(9)(iii), 98.36(c)(2)(ix)]
- Inputs for Equation C-10
- Inputs for Equation C-13

Table 41
Tier 4 Fuel Details Data Element Definitions


Data Element Name	Description
Tier4FuelDetails	Parent Element (Conditionally Required): A collection of data elements containing information for fuels that are combusted in configurations that use Tier 4.
EmissionsNodeDetails	Parent Element: The annual emissions by type of fuel.
TotalCH4CombustionEmissions	The total annual CH ₄ mass emissions for the specified fuel combusted in the reporting configuration, calculated using Equation C-10. Report the value in the child data element CalculatedValue . Set the units of measure to "Metric Tons" in the attribute massUOM .
TotalN2OCombustionEmissions	The total annual N ₂ O mass emissions for the specified fuel combusted in the reporting configuration, calculated using Equation C-10. Report the value in the child data element CalculatedValue . Set the units of measure to "Metric Tons" in the attribute massUOM .
CH4EmissionsCO2Equivalent	The total annual CH ₄ mass emissions for the specified fuel combusted in the reporting configuration. Multiply the calculated value for CH ₄ emissions by the Global Warming Potential of 25. Report the value in the child data element CalculatedValue . Set the units of measure to "Metric Tons" in the attribute massUOM .
N2OEmissionsCO2Equivalent	The total annual N_2O mass emissions for the specified fuel combusted in the reporting configuration. Multiply the calculated value for N_2O emissions by the Global Warming Potential of 298. Report the value in the child data element CalculatedValue . Set the units of measure to "Metric Tons" in the attribute massUOM .
EquationC10Inputs	Parent Element (Conditionally Required): A collection of data elements containing information for Equation C10 for units that use Tier 4 Calculation Methodology.
EquationC13Inputs	Parent Element (Conditionally Required): A collection of data elements containing information for Equation C13 to calculate the annual volume of CO2 emitted from each fuel that uses Tier 4 Calculation Methodology

XML Excerpt 33 Example for Tier 4 Fuel Details

```
<ghg:Tier4FuelDetails>
        <ghg:EmissionsNodeDetails>
                <ghg:TotalCH4CombustionEmissions massUOM="Metric Tons">
                         <ghg:CalculatedValue>400.33
                </ghg:TotalCH4CombustionEmissions>
                <ghg:TotalN2OCombustionEmissions massUOM="Metric Tons">
                         <ghg:CalculatedValue>40.111
                </ghq:TotalN2OCombustionEmissions>
                <ghg:CH4EmissionsCO2Equivalent massUOM="Metric Tons">
                         <ghg:CalculatedValue>8400.9
                </ghg:CH4EmissionsCO2Equivalent>
                <ghg:N2OEmissionsCO2Equivalent massUOM="Metric Tons">
                         <ghg:CalculatedValue>12400.5
/ghg:CalculatedValue>
                </ghg:N2OEmissionsCO2Equivalent>
        </ghg:EmissionsNodeDetails>
        <ghg:EquationC10Inputs>
                 ..See XML Excerpt 34 for details
        </ghg:EquationC10Inputs>
    </ghg:Tier4FuelDetails>
</ghg:TierFuelDetails>
```

Note: The code excerpt above is presented here to demonstrate the concept of reporting greenhouse gas emissions data.

Figure 54
Equation C10 Inputs Schema Diagram

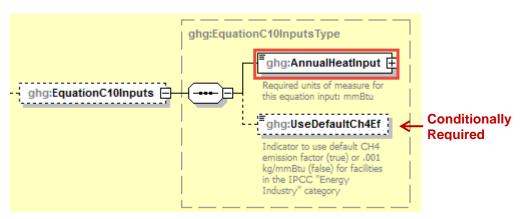

When a Tier 4 (CEMS) configuration is used, report the following inputs for Equation C-10:

- Cumulative annual heat input from combustion of the fuel (mmBtu)
- For facilities in the IPCC "Energy Industry" category that are using coal fuels, whether using the default CH₄ emission factor or .001 kg/mmBtu,

Table 42
Tier 4 Equation C10 Inputs Data Element Definitions

Data Element Name	Description
EquationC10Inputs	Parent Element (Conditionally Required): A collection of data elements containing information for Equation C10 for units that use Tier 4 Calculation Methodology.
AnnualHeatInput	Indicate the cumulative annual heat input from combustion of the fuel in mmBtu.
UseDefaultCh4Ef	Conditionally Required: If the facility is in the IPCC "Energy Industry" category and is using coal fuels, indicate "True" if using the default CH ₄ emission factor or "False" if using .001 kg/mmBtu.



See <u>Section 5.1</u> for instructions on how to report additional Tier 4 details.

XML Excerpt 34 Example for Equation C10 Inputs

ghg:EquationC13InputsType

ghg:FuelQuantity

Required units of measure for this equation input: pounds (solid), gallons (liquid), scf (gas)

ghg:HighHeatValue

Required units of measure for this equation input: Btu/pound (solid), Btu/gallon (liquid), Btu/scf (gas)

ghg:CarbonFFactor

Required units of measure for this equation input: scf

CO2/mmBtu

ghg:Vff

Required units of measure for this equation input: scf

Figure 55
Equation C13 Inputs Schema Diagram

When a Tier 4 (CEMS) configuration is used, report the following inputs for Equation C-13:

- The total quantity of the fossil fuel combusted in the reporting year (from company records) in pounds (solid), gallons (liquid), and scf (gaseous).
- The high heat value of the fossil fuel, from fuel sampling and analysis in Btu/lb (solid), Btu/gal (liquid), or Btu/scf (gaseous).
- Fuel-specific carbon-based F-factor in scfCO₂/mmBtu.
- The annual volume of CO2 emitted from fossil fuel combustion

Table 43
Tier 4 Equation C13 Inputs Data Element Definitions

Data Element Name	Description
EquationC13Inputs	Parent Element (Conditionally Required): A collection of data elements containing information for Equation C10 for units that use Tier 4 Calculation Methodology.
FuelQuantity	Indicate the total quantity of the fossil fuel combusted in the reporting year, from company records in pounds (solid), gallons (liquid), or scf (gas).
HighHeatValue	Indicate the high heat value of the fossil fuel, from fuel sampling and analysis in Btu/lb (solid), Btu/gallon (liquid) or Btu/scf (gas).
CarbonFFactor	Indicate the fuel-specific carbon based F-factor in scf CO ₂ /mmBtu


Data Element Name	Description
Vff	Specify the annual volume of CO2 emitted from combustion of a particular fossil fuel in scf.

XML Excerpt 35 Example for Equation C13 Inputs

See <u>Section 5.1</u> for instructions on how to report additional Tier 4 details.

4.5 Part 75 Fuel Details

Figure 56
Part 75 Fuel Details Schema Diagram

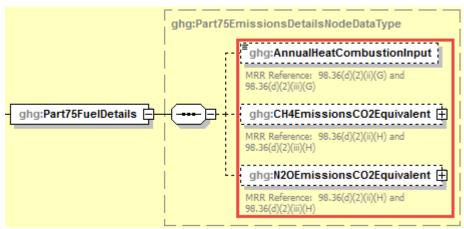

Note: Data elements boxed in red are required.

For configurations using the alternative CO_2 mass emissions calculation methods provided in **98.33(a)(5)** (Year-round Part 75 heat input reporters), Subpart C requires the following information for each fuel type listed in Table C-2 (including biomass fuel(s)) except as otherwise provided in 98.33(c)(4)(ii)(D)):

- The total annual heat input from each fuel listed in Table C-2 [98.36(d)(1)(iv), 98.36(d)(2)(ii)(G), 98.36(d)(2)(iii)(G)].
- The total annual CH₄ mass emissions derived from Equation C-10, in metric tons CO₂e [98.36(d)(1)(iii), 98.36(d)(2)(ii)(H), 98.36(d)(2)(iii)(H)]
- The total annual N₂O mass emissions derived from Equation C-10, in metric tons CO₂e [98.36(d)(1)(iii), 98.36(d)(2)(ii)(H), 98.36(d)(2)(iii)(H)]

For each fuel, CH_4 and N_2O emissions should be reported at the same level (i.e. monitoring location) as CO_2 emissions are reported.

Table 44
Part 75 Fuel Details Data Element Definitions

Data Element Name	Description
Part75FuelDetails	Parent Element (Conditionally Required): Collection of data elements pertaining to annual CH ₄ and N ₂ O emissions from certain Part 75 units that calculate CO ₂ emissions according to 98.33(a)(5).
AnnualHeatCombustionInput	Conditionally Required: The total heat input from each fuel listed in Table C-2 of Subpart C combusted during the year in mmBtu. This reporting element is only required for fuels listed in Table C-2. Units that use CEMS and elect to use the provision under 98.33(c)(4)(ii)(B) report this element only for the fuel to which the total heat input was attributed.
CH4EmissionsCO2Equivalent	Parent Element (Conditionally Required): The total annual CH ₄ mass emissions for the specified fuel combusted at each monitored location in metric tons CO ₂ e, calculated using Equation C-10. Multiply the calculated value for CH ₄ emissions by the Global Warming Potential to arrive at the CO ₂ e of the CH ₄ emissions. Report the value in the child data element CalculatedValue. Set the units of measure to "Metric Tons" in the attribute massUOM.
N2OEmissionsCO2Equivalent	Parent Element (Conditionally Required): The total annual N ₂ O mass emissions for the specified fuel combusted at each monitored location in metric tons CO ₂ e, calculated using Equation C-10. Multiply the calculated value for N ₂ O emissions by the Global Warming Potential to arrive at the CO ₂ e of the N ₂ O emissions. Report the value in the child data element CalculatedValue. Set the units of measure to "Metric Tons" in the attribute massUOM.

XML Excerpt 36 Example for Part 75 Fuel Details

Note: The code excerpt above is presented here to demonstrate the concept of reporting greenhouse gas emissions data.




See Section 3.6 for instructions on how to report additional Part 75 details.

5.0 Additional Configuration Level Emission Reporting

5.1 Biogenic CO₂ Verification Data

Subpart C requires the following additional information aggregated at the configuration-level for configuration types 1, 2, 3, 4, and 5. This information is **conditionally required**. Report only if ASTM methods D7495-08 and D6866-08 were used to determine the biogenic portion of the annual CO_2 emissions for a unit.

Figure 57
Biogenic Portion of CO₂ Emissions and Portion Verification Schema Diagram

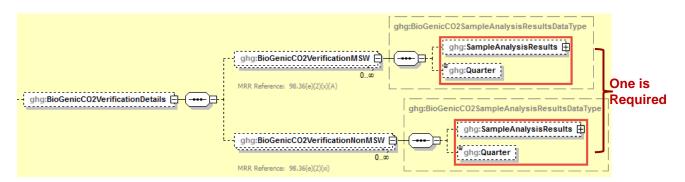

Note: Please see page 4 of this document for more information on conditionally required elements

- Conditionally Required: If ASTM methods D7495-08 and D6866-08 were used to determine the biogenic portion of the annual CO₂ emissions from MSW combustion as described in 98.34(d), then report the following:
 - The quarterly sample analysis results using data element "BioGenicCO2VerificationMSW". [98.36(e)(2)(x)(A)]

Note: This applies only when MSW is either the primary fuel or the only fuel with a biogenic component combusted.

OR

- Conditionally Required: If ASTM methods D7495-08 and D6866-08 were used in accordance with 98.34(e) to determine the biogenic portion of the annual CO₂ emissions from a unit that combusts combinations of biomass fuel(s), or heterogeneous fuels that have a biomass component, e.g., tires, and fossil (or other non-biogenic) fuel(s), then report the following:
 - The quarterly sample analysis results using data element "BioGenicCO2VerificationNonMSW". [98.36(e)(2)(xi)]

Table 45 Biogenic CO₂ Verification Details Data Element Definitions

Data Element Name	Description
BiogenicCO2Verification Details	Parent Element (Conditionally Required): A collection of data elements containing details regarding the quarterly biogenic portion sampling results. Report only if ASTM methods D7495-08 and D6866-08 were used to determine the biogenic portion of the annual CO ₂ emissions for a unit.
BioGenicCO2VerificationMSW	Parent Element (Conditionally Required): A collection of data elements containing details regarding the quarterly biogenic portion sampling results if burning MSW.
Sample Analysis Results	The results of each quarterly sample analysis. Report the value in the child data element MeasureValue expressed as a decimal fraction. $[98.36(e)(2)(x)(A)]$
Quarter	Quarter in which sample was taken (First Quarter, Second Quarter, Third Quarter, Fourth Quarter). [98.36(e)(2)(x)(A)]
BioGenicCO2VerificationNonMSW	Parent Element (Conditionally Required): A collection of data elements containing details regarding the quarterly biogenic portion sampling results if co-firing biogenic fuel(s) (or partly-biogenic fuels, including tires if you are electing to report biogenic CO ₂ emissions from tire combustion) and non-biogenic fuel(s).
Sample Analysis Results	The results of each quarterly sample analysis. Report the value in the child data element MeasureValue expressed as a decimal fraction. [98.36(e)(2)(xi)]
Quarter	Quarter in which sample was taken (First Quarter, Second Quarter, Third Quarter, Fourth Quarter). [98.36(e)(2)(xi)]

XML Excerpt 37 Example for Biogenic Portion of CO₂ Emissions and Portion Verification Data


Note: The code excerpt above is presented here to demonstrate the concept of reporting greenhouse gas emissions data.

See <u>Section 4.0</u> for instructions on how to report fuel data for the configuration identified.

5.2 Tier 4 Details


For configurations of Type 2 and Type 5, Subpart C requires additional information aggregated at the configuration-level.

Figure 58 Tier 4 Details Schema Diagram

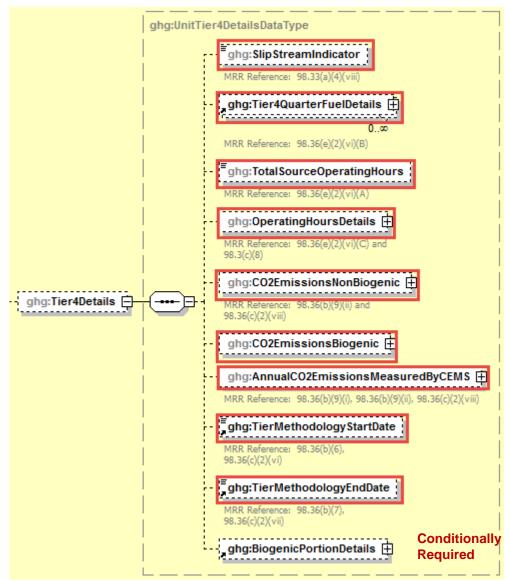

Note: Data elements boxed in red are required. Please see page 4 of this document for more information on conditionally required elements.

Figure 59
Tier 4 Quarter Details Schema Diagram

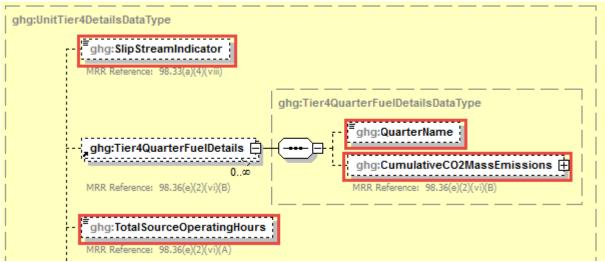

Note: Data elements boxed in red are required.

For configurations of Type 2 and Type 5, report the following information:

- Specify if emissions reported for the CEMS include emissions calculated according to 98.33(a)(4)(viii) for a slipstream that bypassed the CEMS [98.33(a)(4)(viii)]
- The cumulative CO₂ mass emissions for each quarter during the reporting year [98.36(e)(2)(vi)(B)]
- The total number of source operating hours in the reporting year [98.36(e)(2)(vi)(A)]

Table 46
Tier 4 Details Data Element Definitions

Data Element Name	Description
Tier4Details	Parent Element (Conditionally Required): A collection of data elements containing information regarding units that use Tier 4 only.
SlipStreamIndicator	An indication (Y/N) that the emissions reported for the CEMS include emissions calculated according to 98.33(a)(4)(viii) for a slipstream that bypassed the CEMS.
Tier4QuarterFuelDetails	Parent Element
QuarterName	The name of the quarter. See list of allowable values: First Quarter Second Quarter Third Quarter Fourth Quarter


Data Element Name	Description
CumulativeCO2MassEmissions	Parent Element: The cumulative CO ₂ mass emissions for the specified quarter of the reporting year. The cumulative value is the sum of hourly emissions for the respective quarter only (for example, for the fourth quarter, the emissions will be summed for the fourth quarter only, not from all four quarters in the year). Report the value in the child data element CalculatedValue . Set the units of measure to "Metric Tons" in the attribute massUOM .
TotalSourceOperatingHours	The total number of source operating hours in the reporting year.

XML Excerpt 38 Example for Tier 4 Details

```
<ghg:Tier4Details>
          <ghg:SlipStreamIndicator>Y</ghg:SlipStreamIndicator>
          <ghg:Tier4QuarterFuelDetails>
                    <ghg:QuarterName>First Quarter
                    <ghg:CumulativeCO2MassEmissions massUOM="Metric Tons">
    <ghg:CalculatedValue>4100.2/ghg:CalculatedValue>
          </ghg:CumulativeCO2MassEmissions></ghg:Tier4QuarterFuelDetails><ghg:Tier4QuarterFuelDetails>
                    <ghg:QuarterName>Second Quarter<ghg:QuarterName><
<ghg:CumulativeCO2MassEmissions massUOM="Metric Tons">
                              <ghg:CalculatedValue>4200.4
                    </ghg:CumulativeCO2MassEmissions>
          </ghg:Tier4QuarterFuelDetails>
          <ghg:Tier4QuarterFuelDetails>
  <ghg:QuarterName>Third Quarter/ghg:QuarterName>
                    <ghg:CumulativeCO2MassEmissions massUOM="Metric Tons">
                              <ghg:CalculatedValue>4300.6</php:CalculatedValue>
                    </ghg:CumulativeCO2MassEmissions>
          </ghg:Tier4QuarterFuelDetails>
          <ghg:Tier4QuarterFuelDetails>
                    <ghg:QuarterName>Fourth Quarter</ghg:QuarterName>
                    <ghg:CumulativeCO2MassEmissions massUOM="Metric Tons">
                              <ghg:CalculatedValue>4400.8
                    </ghg:CumulativeCO2MassEmissions>
          </ghg:Tier4QuarterFuelDetails>
          <ghg:TotalSourceOperatingHours>4000/ghg:TotalSourceOperatingHours>
```

Note: The code excerpt above is presented here to demonstrate the concept of reporting greenhouse gas emissions data.

Figure 60 Operating Hours Details Schema Diagram

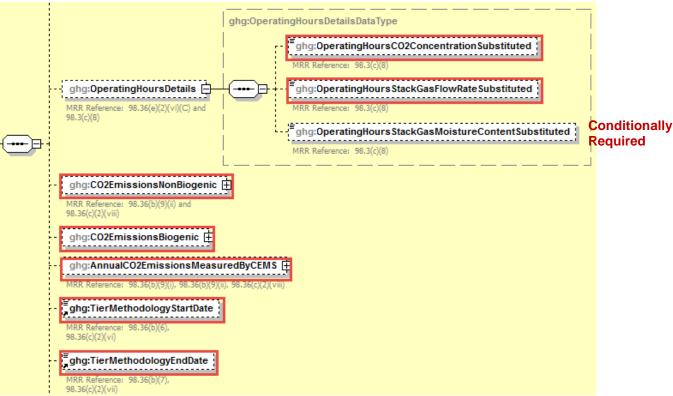

Note: Data elements boxed in red are required.

For configurations of Type 2 and Type 5, report the following information:

- The total operating hours in which a substitute data value was used in the emissions calculations for the CO_2 concentration parameter [98.36(e)(2)(vi)(C), 98.3(c)(8)]
- The total operating hours in which a substitute data value was used in the emissions calculations for the stack gas flow rate parameter [98.36(e)(2)(vi)(C), 98.3(c)(8)]
- Conditionally Required: The total operating hours in which a substitute data value was used in the emissions calculations for the stack gas moisture content parameter (if moisture correction is required and a continuous moisture monitor is used) [98.36(e)(2)(vi)(C), 98.3(c)(8)]
- The total annual non-biogenic CO₂ mass emissions (i.e. CO₂ mass emissions from fossil fuels, sorbent use and process emissions) [98.36(b)(9)(ii), 98.36(c)(2)(viii)]
- The total annual biogenic CO₂ mass emissions [98.36(b)(9)(ii), 98.36(c)(2)(viii)]
- The total annual CO₂ mass emissions measured by the CEMS (this includes both biogenic and non-biogenic CO₂) [98.36(b)(9)(i)-(ii), 98.36(c)(2)(viii)]
- The methodology start date and end date for the configuration [98.36(b)(6)-(7), 98.36(c)(2)(vi)-(vii)]

Table 47 Operating Hours Details Data Element Definitions


Data Element Name	Description
OperatingHoursDetails	Parent Element: A collection of data elements containing details about the percentage of source operating hours in which a substitute data value was in the emissions calculations.
OperatingHoursCO2ConcentrationSubstituted	The total operating hours in which a substitute data value was used in the emissions calculations for the CO_2 concentration parameter (if an O_2 monitor is used to calculate CO_2 concentration, report missing data for the O_2 monitor here).
OperatingHoursStackGasFlowRateSubstituted	The total operating hours in which a substitute data value was used in the emissions calculations for the stack gas flow rate parameter.
OperatingHoursStackGasMoistureContentSubstituted	Conditionally Required: If moisture correction is required and a continuous moisture monitor is used, the total operating hours in which a substitute data value was used in the emissions calculations for the stack gas moisture content parameter. Otherwise, do not report this element.
CO2EmissionsNonBiogenic	Total annual non-biogenic CO ₂ mass emissions (includes fossil fuel, sorbent, process CO ₂ emissions and fossil CO ₂ from fuels with mixed fossil and biogenic components). Report the value in the child data element CalculatedValue . Set the units of measure to "Metric Tons" in the attribute massUOM .
CO2EmissionsBiogenic	Total annual biogenic CO ₂ mass emissions from biomass fuels and the biogenic CO ₂ from fuels with mixed fossil and biogenic components (i.e. MSW or tires). Report the value in the child data element CalculatedValue . Set the units of measure to "Metric Tons" in the attribute massUOM .
AnnualCO2EmissionsMeasuredByCEMS	The total annual CO ₂ mass emissions measured by the CEMS (this includes both biogenic and non-biogenic CO ₂). Report the value in the child data element CalculatedValue . Set the units of measure to "Metric Tons" in the attribute massUOM .
TierMethodologyStartDate	The tier methodology start date for the specified reporting configuration (YYYY-MM-DD).
TierMethodologyEndDate	The tier methodology end date for the specified reporting configuration (YYYY-MM-DD).

XML Excerpt 39 Example for Operating Hours Details

```
<ghg:OperatingHoursDetails>
        <ghg:OperatingHoursCO2ConcentrationSubstituted>400</ghg:OperatingHoursCO2ConcentrationSubstituted>
       uted>
</ghg:OperatingHoursDetails>
<ghg:CO2EmissionsNonBiogenic massUOM="Metric Tons">
        <ghg:CalculatedValue>30000.3
/ghg:CalculatedValue>
</ghq:CO2EmissionsNonBiogenic>
<ghg:CO2EmissionsBiogenic massUOM="Metric Tons">
        <ghg:CalculatedValue>400.1</phg:CalculatedValue>
</ghg:CO2EmissionsBiogenic>
<ghg:AnnualCO2EmissionsMeasuredByCEMS massUOM="Metric Tons">
        <ghg:CalculatedValue>40000.7</php:CalculatedValue>
</ghg:AnnualCO2EmissionsMeasuredByCEMS>
<ghg:TierMethodologyStartDate>2011-01-01/ghg:TierMethodologyStartDate>
<ghg:TierMethodologyEndDate>2011-12-31/ghg:TierMethodologyEndDate>
```

Note: The code excerpt above is presented here to demonstrate the concept of reporting greenhouse gas emissions data.

Figure 61
Biogenic Portion Details Schema Diagram

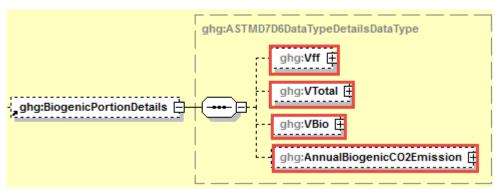

Note: Data elements boxed in red are required.

Were biogenic CO_2 emissions estimated using the methodology described by Equations C-12, C-13 and C-14?

If biogenic CO₂ emissions were estimated using the methodology described by Equations C-12, C-13 and C-14 (see section 98.33(e)(2)), then the following addition information is also required by Subpart C for configurations of Type 2 and 5:

- The total annual volume of CO₂ emitted from the combustion of all fossil fuels, Vff [98.36(e)(2)(ix)(B)]
- The total annual volume of CO₂ emitted from the combustion of all fuels, Vtotal [98.36(e)(2)(ix)(A)]
- The total annual volume of CO₂ emitted from the combustion of all biomass fuels, Vbio [98.36(e)(2)(ix)(C)]
- The total annual biogenic CO₂ mass emissions calculated using the procedures in 98.33(e)(2) [98.36(e)(2)(ix)(G)]

Please note that the BiogenicPortionDetails parent element is not related to the ASTM biogenic fraction [98.36(e)(2)(x)(A)] reporting requirement.

Table 48
Biogenic Portion Details Data Element Definitions

Data Element Name	Description
BiogenicPortionDetails	Parent Element (Conditionally Required): A collection of data elements to report if biogenic CO ₂ emissions were estimated using the methodology described by Equations C-12, C-13 and C-14. Otherwise, do not report these elements.
Vff	The annual volume of CO ₂ emitted from the combustion of all fossil fuels. (Equation C-13) Report the value in the child data element MeasureValue . Set the units of measure to "scf" in the attribute volUOM .
VTotal	The total annual volume of CO ₂ emitted from the combustion of all fuels. Sum of all hourly volume of CO ₂ values (VCO ₂ h) for the reporting year (Equation C-12). Report the value in the child data element MeasureValue . Set the units of measure to "scf" in the attribute volUOM .
VBio	The annual volume of CO ₂ from the combustion of all biomass fuels. Subtract Vff from Vtotal (and any process emissions from a unit that is subject to another Subpart of part 98). Report the value in the child data element MeasureValue . Set the units of measure to "scf" in the attribute volUOM .
AnnualBiogenicCO2Emission	The total annual biogenic CO ₂ mass emissions. This value should be the same as reported for the data element CO2EmissionsBiogenic. Report the value in the child data element CalculatedValue . Set the units of measure to "Metric Tons" in the attribute massUOM .


XML Excerpt 40 Example for Biogenic Portion Details

Note: The code excerpt above is presented here to demonstrate the concept of reporting greenhouse gas emissions data.

5.3 Non Operational Units C Details

Facilities may elect to indicate that a unit reported in previous reporting years was not operating during the current reporting year.

Figure 62 Non Operational Units C Details

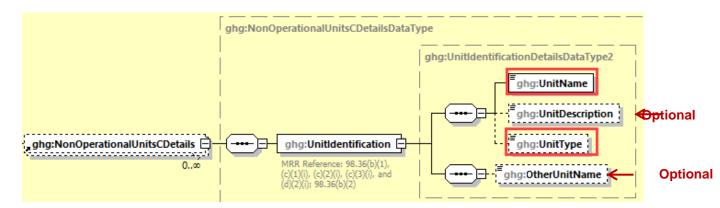

Note: Reporting of Non Operational Units is optional. Data elements boxed in red are conditionally required.

Table 49 Unit Identification for Non Operational Units

Data Element Name	Description
NonOperationalUnitsCDetails	Optional Parent Element: A collection of data elements containing details regarding each stationary fuel combustion unit configuration.
UnitIdentification	Parent Element: A collection of data elements containing the identity of each Subpart C reporting configuration.
UnitName	A user-defined identifier for this unit. Each unit or configuration must have a unique UnitName. [98.36(b)(1)]. Alphanumeric and most special characters may be used. Do not use quotes, apostrophes, or commas.
UnitDescription	An optional description or label.
UnitType	A code representing the type of unit. See the list of allowable unit type codes below. If the unit type is not provided in the list, report "OCS (Other combustion source)" and report the unit type using the OtherUnitName element. [98.36(b)(2)] See list of allowable values: PCWD (Pulverized coal, wall-fired, dry bottom) PCWW (Pulverized coal, wall-fired, wet bottom) PCT (Pulverized coal, tangentially-fired) PCO (Pulverized coal, tangentially-fired) PCO (Pulverized coal, other) CF (Cyclone Furnace) S (Stoker Boiler) BFB (Boiler, bubbling fluidized bed) CFB (Boiler, circulating fluidized bed) PFB (Boiler, pressurized fluidized bed) OFB (Fluidized bed, other) OB (Boiler, other) FLR (Flare) II (Incinerator, institutional) ICI (Incinerator, commercial and industrial) IGCC (Integrated gasification combined cycle) RICE (Reciprocating internal combustion engine) MWC (Municipal waste combustor) PRH (Process Heater) TODF (Thermal oxidizer, direct fired, no heat recovery) RTO (Regenerative thermal oxidizer) RCO (Regenerative catalytic oxidizer) CCCT (CC (Turbine, combined cycle)) SCCT (CT (Turbine, simple cycle combustion)) CH (Comfort heater) PD (Product or intermediate product dryer) K (Kiln) F (Furnace) C (Calciner) O (Oven) HWH (Heater, hot water) IFCE (Direct fired industrial food cooking equipment) NGLH (Heater, catalytic) HMH (Heater, heat medium for heat exchange)

Data Element Name	Description
	COB (By-product recovery coke oven battery combustion stacks (§98.172)) FeFS (Subpart Q - flame suppression) FeFL (Subpart Q - ladle reheater)
	Q (Other Subpart Q combustion sources not otherwise listed.) HPPU (hydrogen production process units) OCS (Other combustion source)
OtherUnitName	Conditionally Required: Enter the unit type if "OCS (Other combustion source)" was entered for UnitType. Otherwise, do not report this element.

XML Excerpt 41 Example for Non Operational Units

Note: The code excerpt above is presented here to demonstrate the concept of reporting greenhouse gas emissions data.

See <u>Section 6.0</u> for instructions on how to report facility level roll-up emissions or see <u>Section 2.0</u> for instructions on how to report for a different configuration.

6.0 Facility Level Roll-up Emissions

This section provides a description of how to roll up Subpart C emissions totals into the facility's total CO₂e emissions, reported under Subpart A.

- Each facility must report the following facility-level emission data:
 - Total CO₂ equivalent (CO₂e) emissions (excluding biogenic CO₂) aggregated across all direct emitter source categories (Subparts C-II, SS, and TT) associated with the facility.
 - Total biogenic CO₂ emissions aggregated across all direct emitter source categories (Subparts C-II, SS and TT) associated with the facility.
- Each supplier must report the following supplier data:
 - Total CO₂e associated with products supplied aggregated across all supplier source categories (Subparts LL-QQ) associated with the facility.

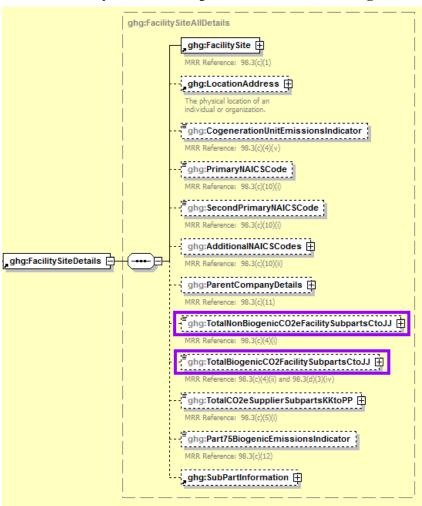


Figure 63
Facility-Level Roll-up Emissions Schema Diagram

Note: Subpart C emissions totals roll up into the data element boxed in purple (Subpart A).

For Subpart C, report total emissions for CO₂e (excluding biogenic CO₂) and biogenic CO₂ using the following guidelines.

- 1) Add the total CO₂e value for Subpart C in metric tons to the total CO₂e emissions (excluding biogenic CO₂) aggregated across all direct emitter source categories (Subparts C-II, SS, and TT) associated with the facility as follows:
- Add the value reported under Subpart C for CO₂ (excluding biogenic CO₂).
- Multiply the value reported under Subpart C for CH₄ by the Global Warming Potential for CH₄
- Multiply the value reported under Subpart C for N₂O by the Global Warming Potential for N₂O
- 2) Add the total annual biogenic CO₂ mass emissions reported under Subpart C to the total biogenic CO₂ aggregated across all direct emitter source categories (Subparts C-II, SS, and TT) associated with the facility.

Note: You must follow the rounding rules found in <u>Table 1</u>.

IV. Appendix A: Sample XML Document for Subpart C

(Note: Data values do not reflect an actual facility's emissions.)

```
<GHG xmlns="http://www.ccdsupport.com/schema/ghg">
    <FacilitySiteInformation>
         <CertificationStatement>The designated representative or alternate designated representative must sign (i.e., agree
to) this certification statement. If you are an agent and you click on "SUBMIT", you are not agreeing to the certification
statement, but are submitting the certification statement on behalf of the designated representative or alternate designated
representative who is agreeing to the certification statement. An agent is only authorized to make the electronic submission on
behalf of the designated representative, not to sign (i.e., agree to) the certification statement.</CertificationStatement>
         <ReportingYear>2017</ReportingYear>
         <FacilitySiteDetails>
              <FacilitySite>
                  <FacilitySiteIdentifier>557863/FacilitySiteIdentifier>
                  <FacilitySiteName>Violet Test</FacilitySiteName>
             </FacilitySite>
             <LocationAddress>
                  <LocationAddressText>124 N St</LocationAddressText>
                  <LocalityName>Arlington</LocalityName>
                  <StateIdentity>
                       <StateCode>VA</StateCode>
                  </StateIdentity>
                  <AddressPostalCode>22207</AddressPostalCode>
             </LocationAddress>
             <CogenerationUnitEmissionsIndicator>N</CogenerationUnitEmissionsIndicator>
             <PrimaryNAICSCode>211111</PrimaryNAICSCode>
             <ParentCompanyDetails>
                  <ParentCompany>
                       <ParentCompanyLegalName>VIOLET</ParentCompanyLegalName>
                       <StreetAddress>124 n st</StreetAddress>
                       <City>arlington</City>
                       <State>VA</State>
                       <Zip>22207</Zip>
                       <PercentOwnershipInterest>100</PercentOwnershipInterest>
                  </ParentCompany>
             </ParentCompanyDetails>
              <TotalNonBiogenicCO2eFacilitySubpartsCtoJJ massUOM="Metric
Tons">2.3</TotalNonBiogenicCO2eFacilitySubpartsCtoJJ>
              <TotalBiogenicCO2FacilitySubpartsCtoJJ massUOM="Metric
Tons">1200</TotalBiogenicCO2FacilitySubpartsCtoJJ>
             <TotalCO2eSupplierSubpartsKKtoPP massUOM="Metric Tons">0</TotalCO2eSupplierSubpartsKKtoPP>
             <PlantCodeIndicator>N</PlantCodeIndicator>
              <SubPartInformation>
                  <SubPartC>
                       <GHGasInfoDetails>
```

<GHGasName>Biogenic Carbon dioxide</GHGasName>

```
<GHGasQuantity massUOM="Metric Tons">
        <CalculatedValue>1200</CalculatedValue>
    </GHGasQuantity>
</GHGasInfoDetails>
<GHGasInfoDetails>
    <GHGasName>Methane</GHGasName>
    <GHGasQuantity massUOM="Metric Tons">
        <CalculatedValue>0.02</CalculatedValue>
    </GHGasQuantity>
</GHGasInfoDetails>
<GHGasInfoDetails>
    <GHGasName>Nitrous Oxide</GHGasName>
    <GHGasQuantity massUOM="Metric Tons">
        <CalculatedValue>0.006</CalculatedValue>
    </GHGasQuantity>
</GHGasInfoDetails>
<GHGasInfoDetails>
    <GHGasName>Carbon Dioxide</GHGasName>
    <GHGasQuantity massUOM="Metric Tons">
         CalculatedValue>0</CalculatedValue>
    </GHGasOuantity>
</GHGasInfoDetails>
<UnitsCDetails>
    <UnitIdentification>
        <UnitName>GP- Violet 1</UnitName>
        <UnitType>OCS (Other combustion source)</UnitType>
    </UnitIdentification>
    <SmallUnitAggregationDetails>
        <UseIvtIndicator>Y</UseIvtIndicator>
        <HighestMaxRatedheatInputCapacity heatUOM="mmBtu/hr">
             <MeasureValue>200</MeasureValue>
        </HighestMaxRatedheatInputCapacity>
    </SmallUnitAggregationDetails>
    <CO2EmissionsGeneratedUsingSorbentInjectionDetails>
        <TotalAmountOfSorbentUsed massUOM="Short Tons">4</TotalAmountOfSorbentUsed>
        <SorbentMolecularWeight>0.35</SorbentMolecularWeight>
        <SorbentRatio>0.2</SorbentRatio>
    </CO2EmissionsGeneratedUsingSorbentInjectionDetails>
    <PlantCode>881111, 881112</PlantCode>
    <SorbentCO2EmissionsQuantity massUOM="Metric Tons">
        <CalculatedValue>91.5</CalculatedValue>
        <OverrideIndicator>N</OverrideIndicator>
    </SorbentCO2EmissionsQuantity>
    <CO2EmissionsAllBiomassFuelsCombined massUOM="Metric Tons">
         CalculatedValue>1000</CalculatedValue>
    </CO2EmissionsAllBiomassFuelsCombined>
    <CO2EmissionsAllFossilFuelsCombined massUOM="Metric Tons">
        <CalculatedValue>1000</CalculatedValue>
    </CO2EmissionsAllFossilFuelsCombined>
    <TierFuelDetails>
        <FuelInputsId>215061</FuelInputsId>
        <FuelType>Distillate Fuel Oil No. 1</FuelType>
        <Tier3FuelDetails>
             <TierName>Tier 3 (Equation C-4, liquid fuel)</TierName>
             <TierMethodologyStartDate>2014-01-01</TierMethodologyStartDate>
             <TierMethodologyEndDate>2014-12-31</TierMethodologyEndDate>
             <EmissionsDetailsNode>
                 <TotalCO2CombustionEmissions massUOM="Metric Tons">
                     <CalculatedValue>0.7</CalculatedValue>
                 </TotalCO2CombustionEmissions>
                 <TotalCH4CombustionEmissions massUOM="Metric Tons">
                     <CalculatedValue>0.01</CalculatedValue>
                 </TotalCH4CombustionEmissions>
                 <TotalN2OCombustionEmissions massUOM="Metric Tons">
                     <CalculatedValue>0.003</CalculatedValue>
                 </TotalN2OCombustionEmissions>
                 <CH4EmissionsCO2Equivalent massUOM="Metric Tons">
```

```
<CalculatedValue>0.4</CalculatedValue>
                                       </CH4EmissionsCO2Equivalent>
                                       <N2OEmissionsCO2Equivalent massUOM="Metric Tons">
                                            <CalculatedValue>0.9</CalculatedValue>
                                       </N2OEmissionsCO2Equivalent>
                                   </EmissionsDetailsNode>
                                   <FrequencyofCarbonContentDetermination>Monthly</FrequencyofCarbonContentDe</p>
                                   termination>
                                   <TotalNumberCarbonContentDeterminations>100</TotalNumberCarbonContentDeter
                               minations>
                                   <NumberValidCarbonContentDeterminations>100</NumberValidCarbonContentDete
                              rminations>
                                   < Number of Operating Hours Substituted Fuel Usage
                                   timeUOM="Hours">100</NumberofOperatingHoursSubstitutedFuelUsage>
                               </Tier3FuelDetails>
                          </TierFuelDetails>
                          <TierFuelDetails>
                               <FuelInputsId>215062</FuelInputsId>
                               <FuelType>Distillate Fuel Oil No. 2</FuelType>
                               <Tier3FuelDetails>
                                   <TierName>Tier 3 (Equation C-4, liquid fuel)</TierName>
                                   <TierMethodologyStartDate>2014-01-01</TierMethodologyStartDate>
                                   <TierMethodologyEndDate>2014-12-31</TierMethodologyEndDate>
                                   <EmissionsDetailsNode>
                                        <TotalCO2CombustionEmissions massUOM="Metric Tons">
                                            <CalculatedValue>0.7</CalculatedValue>
                                       </TotalCO2CombustionEmissions>
                                       <TotalCH4CombustionEmissions massUOM="Metric Tons">
                                            <CalculatedValue>0.01</CalculatedValue>
                                       </TotalCH4CombustionEmissions>
                                       <TotalN2OCombustionEmissions massUOM="Metric Tons">
                                            <CalculatedValue>0.003</CalculatedValue>
                                       </TotalN2OCombustionEmissions>
                                       <CH4EmissionsCO2Equivalent massUOM="Metric Tons">
                                            <CalculatedValue>0.4</CalculatedValue>
                                       </CH4EmissionsCO2Equivalent>
                                       <N2OEmissionsCO2Equivalent massUOM="Metric Tons">
                                            <CalculatedValue>0.9</CalculatedValue>
                                        </N2OEmissionsCO2Equivalent>
                                   </EmissionsDetailsNode>
                                   <FrequencyofCarbonContentDetermination>Monthly</FrequencyofCarbonContentDetermination>Monthly
                               termination>
                      <TotalNumberCarbonContentDeterminations>100</TotalNumberCarbonContentDeterminations>
                      <NumberValidCarbonContentDeterminations>100</NumberValidCarbonContentDeterminations>
                                   <NumberofOperatingHoursSubstitutedFuelUsage
timeUOM="Hours">100</NumberofOperatingHoursSubstitutedFuelUsage>
                               </Tier3FuelDetails>
                          </TierFuelDetails>
                          <BioGenicCO2VerificationDetails>
                               <BioGenicCO2VerificationMSW>
                                   <SampleAnalysisResults fractionUOM="decimal fraction">
                                       <MeasureValue>0.2</MeasureValue>
                                   </SampleAnalysisResults>
                                   <Quarter>First Quarter</Quarter>
                               </BioGenicCO2VerificationMSW>
                               <BioGenicCO2VerificationMSW>
                                   <SampleAnalysisResults fractionUOM="decimal fraction">
                                        <MeasureValue>0.2</MeasureValue>
                                   </SampleAnalysisResults>
                                   <Ouarter>Second Ouarter</Ouarter>
                               </BioGenicCO2VerificationMSW>
                               <BioGenicCO2VerificationMSW>
                                   <SampleAnalysisResults fractionUOM="decimal fraction">
                                        <MeasureValue>0.2</MeasureValue>
                                   </SampleAnalysisResults>
                                   <Ouarter>Third Ouarter</Ouarter>
                               </BioGenicCO2VerificationMSW>
```

```
<BioGenicCO2VerificationMSW>
             <SampleAnalysisResults fractionUOM="decimal fraction">
                 <MeasureValue>0.2</MeasureValue>
             </SampleAnalysisResults>
             <Quarter>Fourth Quarter</Quarter>
         </BioGenicCO2VerificationMSW>
    </BioGenicCO2VerificationDetails>
</UnitsCDetails>
<UnitsCDetails>
    <UnitIdentification>
        <UnitName>Violet Test 2</UnitName>
         <UnitType>S (Stoker Boiler)</UnitType>
    </UnitIdentification>
    <IndividualUnitDetails>
         <UseIvtIndicator>Y</UseIvtIndicator>
         <MaxRatedheatInputCapacity heatUOM="mmBtu/hr">
             <MeasureValue>200</MeasureValue>
         </MaxRatedheatInputCapacity>
    IndividualUnitDetails>
    <CO2EmissionsGeneratedUsingSorbentInjectionDetails>
         <TotalAmountOfSorbentUsed massUOM="Short
        Tons">0.2</TotalAmountOfSorbentUsed>
         <SorbentMolecularWeight>0.2</SorbentMolecularWeight>
         <SorbentRatio>0.2</SorbentRatio>
    </CO2EmissionsGeneratedUsingSorbentInjectionDetails>
    <SorbentCO2EmissionsQuantity massUOM="Metric Tons">
         <CalculatedValue>8.0</CalculatedValue>
         <OverrideIndicator>N</OverrideIndicator>
    </SorbentCO2EmissionsQuantity>
    <CO2EmissionsAllBiomassFuelsCombined massUOM="Metric Tons">
         <CalculatedValue>100</CalculatedValue>
    </CO2EmissionsAllBiomassFuelsCombined>
    <TierFuelDetails>
         <FuelInputsId>215089</FuelInputsId>
         <FuelType>Natural Gas (Weighted U.S. Average)
         <Tier1FuelDetails>
             <TierName>Tier 1 (Equation C-1)</TierName>
             <TierMethodologyStartDate>2014-01-01</TierMethodologyStartDate>
             <TierMethodologyEndDate>2014-12-31</TierMethodologyEndDate>
             <EmissionsDetailsNode>
                 <TotalCO2CombustionEmissions massUOM="Metric Tons">
                      <CalculatedValue>0.0</CalculatedValue>
                 </TotalCO2CombustionEmissions>
                 <TotalCH4CombustionEmissions massUOM="Metric Tons">
                      <CalculatedValue>0.00</CalculatedValue>
                 </TotalCH4CombustionEmissions>
                 <TotalN2OCombustionEmissions massUOM="Metric Tons">
                      <CalculatedValue>0.000</CalculatedValue>
                 </TotalN2OCombustionEmissions>
                 <CH4EmissionsCO2Equivalent massUOM="Metric Tons">
                      <CalculatedValue>0</CalculatedValue>
                 </CH4EmissionsCO2Equivalent>
                 <N2OEmissionsCO2Equivalent massUOM="Metric Tons">
                      <CalculatedValue>0</CalculatedValue>
                 </N2OEmissionsCO2Equivalent>
             </EmissionsDetailsNode>
         </Tier1FuelDetails>
    </TierFuelDetails>
    <BioGenicCO2VerificationDetails>
         <BioGenicCO2VerificationMSW>
             <SampleAnalysisResults fractionUOM="decimal fraction">
                 <MeasureValue>0.3</MeasureValue>
             </SampleAnalysisResults>
             <Quarter>First Quarter</Quarter>
         </BioGenicCO2VerificationMSW>
         <BioGenicCO2VerificationMSW>
             <SampleAnalysisResults fractionUOM="decimal fraction">
```

```
<MeasureValue>0.3</MeasureValue>
             </SampleAnalysisResults>
             <Quarter>Second Quarter</Quarter>
        </BioGenicCO2VerificationMSW>
        <BioGenicCO2VerificationMSW>
             <SampleAnalysisResults fractionUOM="decimal fraction">
                 <MeasureValue>0.3</MeasureValue>
             </SampleAnalysisResults>
             <Ouarter>Third Ouarter</Ouarter>
        </BioGenicCO2VerificationMSW>
        <BioGenicCO2VerificationMSW>
             <SampleAnalysisResults fractionUOM="decimal fraction">
                 <MeasureValue>0.3</MeasureValue>
             </SampleAnalysisResults>
             <Quarter>Fourth Quarter</Quarter>
        </BioGenicCO2VerificationMSW>
    </BioGenicCO2VerificationDetails>
</UnitsCDetails>
<UnitsCDetails>
    <UnitIdentification>
        <UnitName>Violet Test 3</UnitName>
        <UnitType>S (Stoker Boiler)</UnitType>
    </UnitIdentification>
    <IndividualUnitDetails>
        <UseIvtIndicator>Y</UseIvtIndicator>
        <MaxRatedheatInputCapacity heatUOM="mmBtu/hr">
             <MeasureValue>120</MeasureValue>
        </MaxRatedheatInputCapacity>
    IndividualUnitDetails>
    <CO2EmissionsGeneratedUsingSorbentInjectionDetails>
        <TotalAmountOfSorbentUsed massUOM="Short
        Tons">0.3</TotalAmountOfSorbentUsed>
        <SorbentMolecularWeight>0.3</SorbentMolecularWeight>
        <SorbentRatio>0.3</SorbentRatio>
    </CO2EmissionsGeneratedUsingSorbentInjectionDetails>
    <SorbentCO2EmissionsQuantity massUOM="Metric Tons">
        <CalculatedValue>12.0</CalculatedValue>
        <OverrideIndicator>N</OverrideIndicator>
    </SorbentCO2EmissionsQuantity>
    <CO2EmissionsAllBiomassFuelsCombined massUOM="Metric Tons">
        <CalculatedValue>100</CalculatedValue>
    </CO2EmissionsAllBiomassFuelsCombined>
    <TierFuelDetails>
        <FuelInputsId>215109</FuelInputsId>
        <FuelType>Distillate Fuel Oil No. 2</FuelType>
        <Tier2FuelDetails>
             <TierName>Tier 2 (Equation C-2a)</TierName>
             <TierMethodologyStartDate>2014-01-01</TierMethodologyStartDate>
             <TierMethodologyEndDate>2014-12-31</TierMethodologyEndDate>
             <Tier2MonthlyHHVDetails>
                 <MonthName>January</MonthName>
                 <HighHeatValue>
                      <IsSubstitutedIndicator>Y</IsSubstitutedIndicator>
                 </HighHeatValue>
             </Tier2MonthlyHHVDetails>
             <Tier2MonthlyHHVDetails>
                 <MonthName>February</MonthName>
                 <HighHeatValue>
                      <IsSubstitutedIndicator>N</IsSubstitutedIndicator>
                 </HighHeatValue>
             </Tier2MonthlyHHVDetails>
             <Tier2MonthlyHHVDetails>
                 <MonthName>March</MonthName>
                 <HighHeatValue>
                      <IsSubstitutedIndicator>N</IsSubstitutedIndicator>
                 </HighHeatValue>
             </Tier2MonthlyHHVDetails>
```

```
<Tier2MonthlyHHVDetails>
                     <MonthName>April</MonthName>
                     <HighHeatValue>
                          <IsSubstitutedIndicator>Y</IsSubstitutedIndicator>
                     </HighHeatValue>
                 </Tier2MonthlyHHVDetails>
                 <Tier2MonthlyHHVDetails>
                     <MonthName>May</MonthName>
                     <HighHeatValue>
                          <IsSubstitutedIndicator>Y</IsSubstitutedIndicator>
                     </HighHeatValue>
                 </Tier2MonthlyHHVDetails>
                 <Tier2MonthlyHHVDetails>
                     <MonthName>June</MonthName>
                     <HighHeatValue>
                          <IsSubstitutedIndicator>N</IsSubstitutedIndicator>
                     </HighHeatValue>
                 </Tier2MonthlyHHVDetails>
                 <Tier2MonthlyHHVDetails>
                     <MonthName>July</MonthName>
                     <HighHeatValue>
                          <IsSubstitutedIndicator>N</IsSubstitutedIndicator>
                     </HighHeatValue>
                 </Tier2MonthlyHHVDetails>
                 <Tier2MonthlyHHVDetails>
                     <MonthName>August</MonthName>
                     <HighHeatValue>
                          <IsSubstitutedIndicator>Y</IsSubstitutedIndicator>
                     </HighHeatValue>
                 </Tier2MonthlyHHVDetails>
                 <Tier2MonthlyHHVDetails>
                     <MonthName>September</MonthName>
                     <HighHeatValue>
                          <IsSubstitutedIndicator>Y</IsSubstitutedIndicator>
                     </HighHeatValue>
                 </Tier2MonthlyHHVDetails>
                 <Tier2MonthlyHHVDetails>
                     <MonthName>October</MonthName>
                     <HighHeatValue>
                          <IsSubstitutedIndicator>N</IsSubstitutedIndicator>
                     </HighHeatValue>
                 </Tier2MonthlyHHVDetails>
                 <Tier2MonthlyHHVDetails>
                     <MonthName>November</MonthName>
                     <HighHeatValue>
                          <IsSubstitutedIndicator>N</IsSubstitutedIndicator>
                     </HighHeatValue>
                 </Tier2MonthlyHHVDetails>
                 <Tier2MonthlyHHVDetails>
                     <MonthName>December</MonthName>
                     <HighHeatValue>
                          <IsSubstitutedIndicator>N</IsSubstitutedIndicator>
                     </HighHeatValue>
                 </Tier2MonthlyHHVDetails>
<FrequencyofHighHeatValueDetermination>Monthly</FrequencyofHighHeatValueDetermination>
                 <EmissionsDetailsNode>
                     <TotalCO2CombustionEmissions massUOM="Metric Tons">
                          <CalculatedValue>0.0</CalculatedValue>
                     </TotalCO2CombustionEmissions>
                     <TotalCH4CombustionEmissions massUOM="Metric Tons">
                          <CalculatedValue>0.00</CalculatedValue>
                     </TotalCH4CombustionEmissions>
                     <TotalN2OCombustionEmissions massUOM="Metric Tons">
                          <CalculatedValue>0.000</CalculatedValue>
                     </TotalN2OCombustionEmissions>
                     <CH4EmissionsCO2Equivalent massUOM="Metric Tons">
                          <CalculatedValue>0</CalculatedValue>
```

```
</CH4EmissionsCO2Equivalent>
                                       <N2OEmissionsCO2Equivalent massUOM="Metric Tons">
                                            <CalculatedValue>0</CalculatedValue>
                                       </N2OEmissionsCO2Equivalent>
                                   </EmissionsDetailsNode>
                               </Tier2FuelDetails>
                          </TierFuelDetails>
                          <BioGenicCO2VerificationDetails>
                               <BioGenicCO2VerificationMSW>
                                   <SampleAnalysisResults fractionUOM="decimal fraction">
                                       <MeasureValue>0.2</MeasureValue>
                                   </SampleAnalysisResults>
                                   <Quarter>First Quarter</Quarter>
                               </BioGenicCO2VerificationMSW>
                               <BioGenicCO2VerificationMSW>
                                   <SampleAnalysisResults fractionUOM="decimal fraction">
                                       <MeasureValue>0.2</MeasureValue>
                                   </SampleAnalysisResults>
                                   <Quarter>Second Quarter</Quarter>
                               </BioGenicCO2VerificationMSW>
                               <BioGenicCO2VerificationMSW>
                                   <SampleAnalysisResults fractionUOM="decimal fraction">
                                       <MeasureValue>0.2</MeasureValue>
                                   </SampleAnalysisResults>
                                   <Ouarter>Third Ouarter</Ouarter>
                               </BioGenicCO2VerificationMSW>
                               <BioGenicCO2VerificationMSW>
                                   <SampleAnalysisResults fractionUOM="decimal fraction">
                                        <MeasureValue>0.2</MeasureValue>
                                   </SampleAnalysisResults>
                                   <Quarter>Fourth Quarter</Quarter>
                               </BioGenicCO2VerificationMSW>
                          </BioGenicCO2VerificationDetails>
                      </UnitsCDetails>
                      </NonOperationalUnitsCDetails>
                          <UnitIdentification>
                               <UnitName>GP- Violet Non-Operating</UnitName>
                               <UnitType>OCS (Other combustion source)</UnitType>
                               <OtherUnitName>Unit Type A</OtherUnitName>
                          </UnitIdentification>
                      </NonOperationalUnitsCDetails>
                 </SubPartC>
             </SubPartInformation>
        </FacilitySiteDetails>
        <StartDate>2017-01-01</StartDate>
        <EndDate>2017-12-31</EndDate>
        <DateTimeReportGenerated>2018-03-06T16:32:27/DateTimeReportGenerated>
    </FacilitySiteInformation>
</GHG>
```